

序号/RevNo.	名称/Title	文件编号/File No.
1	107M塑件主体	QJ/XYT-11093 ~ 11096
2	107塑件后盖	QJ/XYT-11101 ~ 11104
3	107M铁壳	QJ/XYT-11089 ~ 11092
4	DR螺丝	QJ/XYT-11084
5	107M端子(短)	QJ/XYT-11078
6	107M端子(长)	QJ/XYT-11079
7	107Z字片	QJ/XYT-11083


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute  
 Operating Temperature: -55℃--+105℃  
 Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

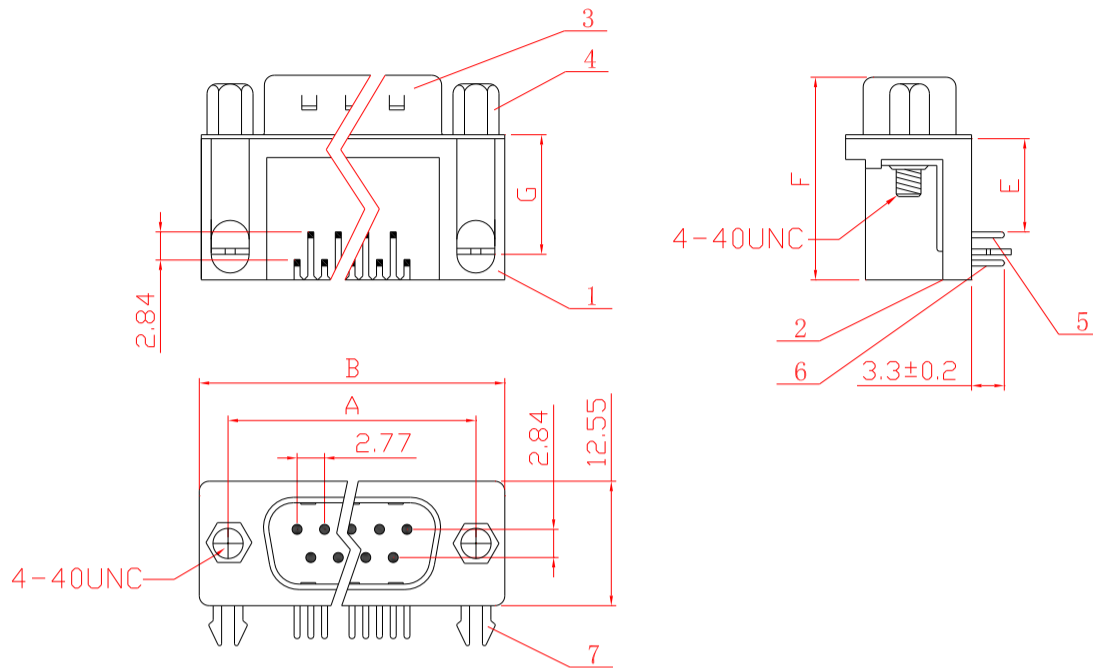

Position	A	B
9	24.99	30.81
15	33.32	39.20
25	47.04	53.10
37	63.50	69.50

E	F	G
7.2	18.4	9.62
9.4	20.64	12.06
13.84	25.3	16.5

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.' ±2' .x ±0.1 .x' ±1' .xx ±0.05 .xx' ±0.5' .xxx ±0.01
		图名/Title	文件编号/File No.	
		107M产品图	QJ/XYT-12013	
		页序/Sheet		
		备注/Remark		单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date

序号/RevNo.	名称/Title	文件编号/File No.
1	107F塑件主体	QJ/XYT-11097 ~ 11100
2	107塑件后盖	QJ/XYT-11101 ~ 11104
3	107F铁壳	QJ/XYT-11085 ~ 11088
4	DR螺丝	QJ/XYT-11084
5	107F端子(短)	QJ/XYT-11080
6	107F端子(长)	QJ/XYT-11081
7	107Z字片	QJ/XYT-11083


Specifications:

Contact Resistance: 30mΩ max.at DCdc 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute  
 Operating Temperature: -55℃--+105℃  
 Contact: Phosphor bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

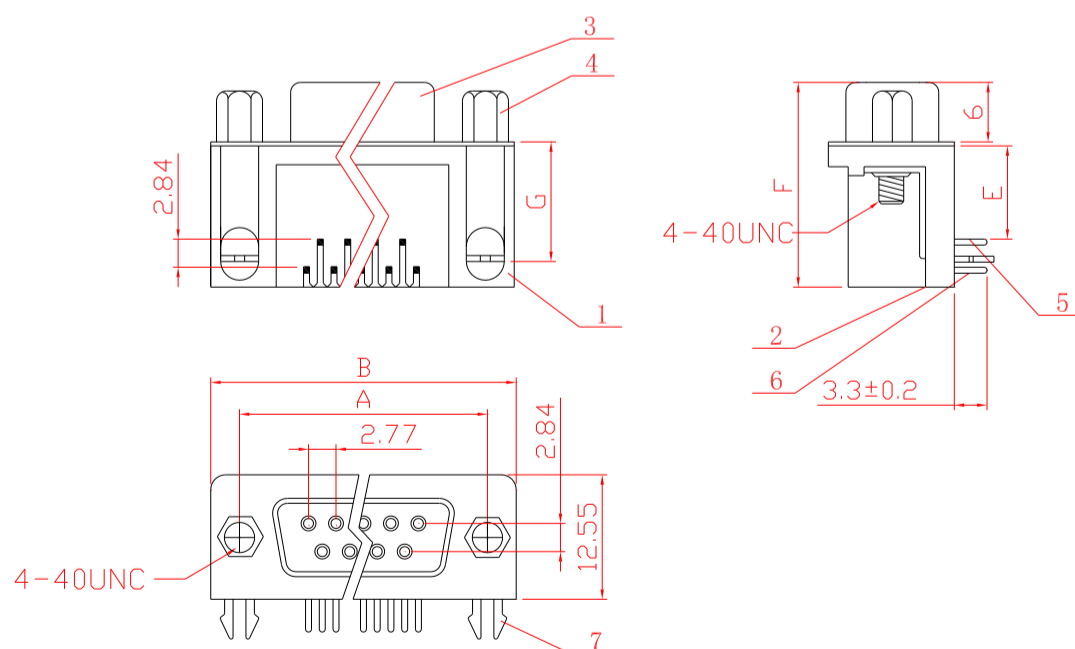

Position	A	B
9	24.99	31.04
15	33.32	39.24
25	47.04	53.04
37	63.50	69.62

E	F	G
7.2	18.4	9.62
9.4	20.64	12.06
13.84	25.3	16.5

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.' ±2' .x ±0.1 .x' ±1' .xx ±0.05 .xx' ±0.5' .xxx ±0.01
		图名/Title	文件编号/File No.	
		107F产品图	QJ/XYT-12014	
		页序/Sheet		
		备注/Remark		单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date