

### General information:

General-purpose relay with socket  
 Gilt contact types  
 Transparent dust-proof cover, socket the standard version of which has 14 pins.  
 The connector mounted on a DIN rail.



IS HH54P(MY4N) 24VDC




IS DYF-14A


### Specification:

Relay	
Insulation resistance	500M $\Omega$ 500VAC
Dielectric Strength	BCC 1000VAC 1min
	BOC 1500VAC 1min
	COC 1500VAC 1min
Operate Time	20ms /25ms
Terminal Type	Socket
Coil Ratings	
Contact ratings	4Z
Contact resistance	50m Q (1A 6VDC)
Contact capacity	3A/220VAC 30VDC
Nominal Coil Power	0.9W/1.2VA
Nominal Voltage	24 VDC
Pull-in Voltage	19.20 VDC
Release Voltage	2.40 VDC
Coil Resistance	640 $\Omega$ $\pm$ 10%
Socket	
Rated voltage	250VAC
Rated current	5A
Insulated voltage	$\geq$ 2KV
Material	PA66+GF(V1/V0)
Clip material	QSn6.5-0.1
Operation temperature	-25°C..+85°C

**Reference data:**

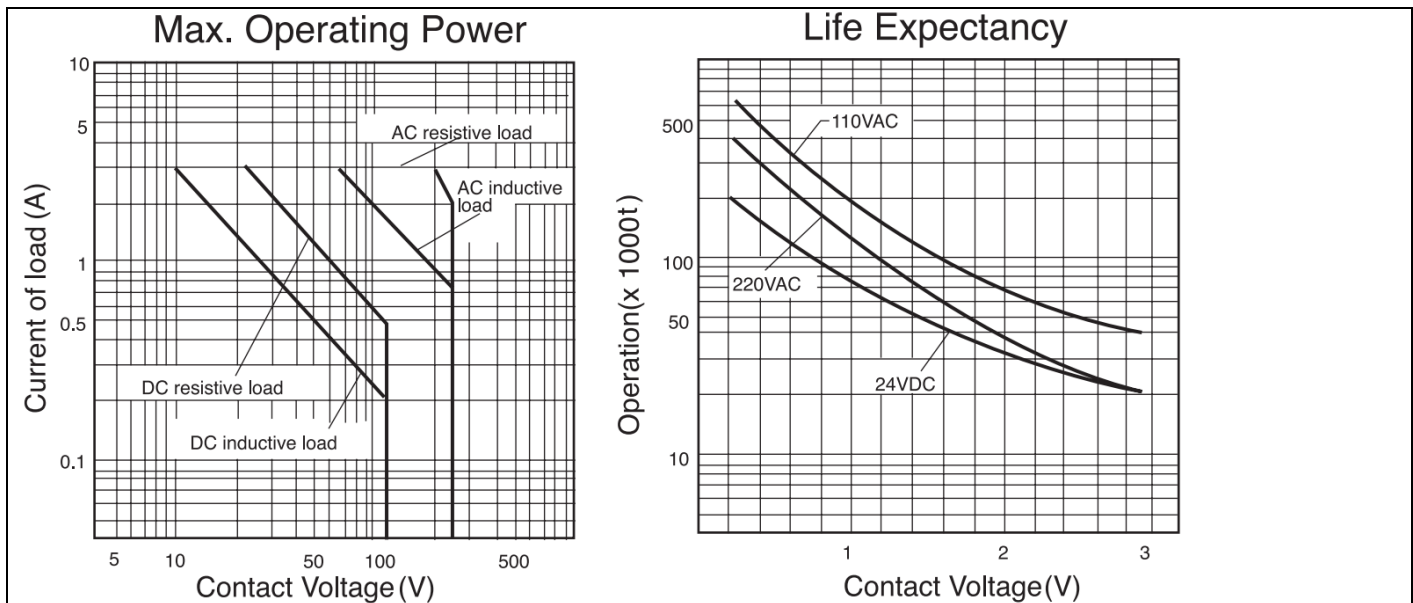

**Dimension. Bottom View:**

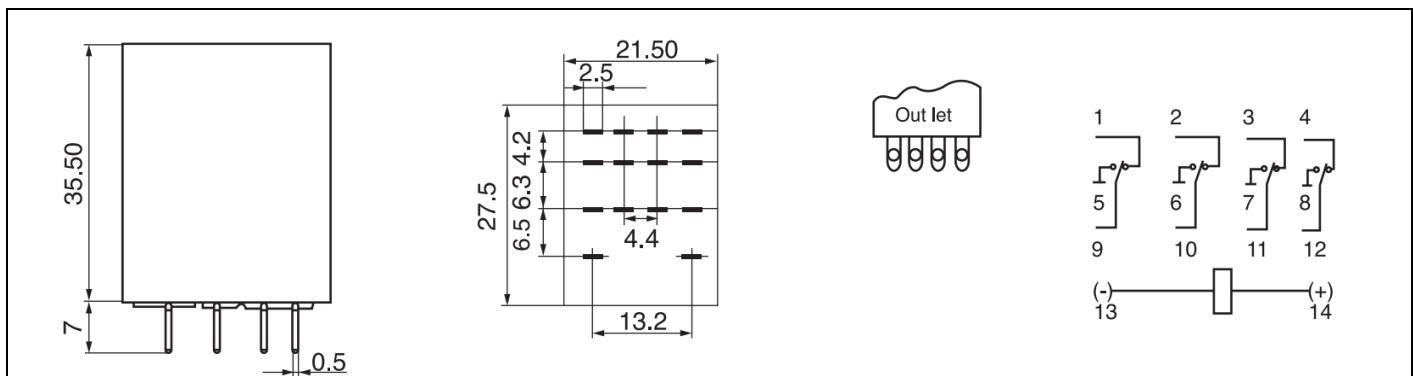

**Mounting port size:    Wiring diagram:    Outline:**

