


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.
未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

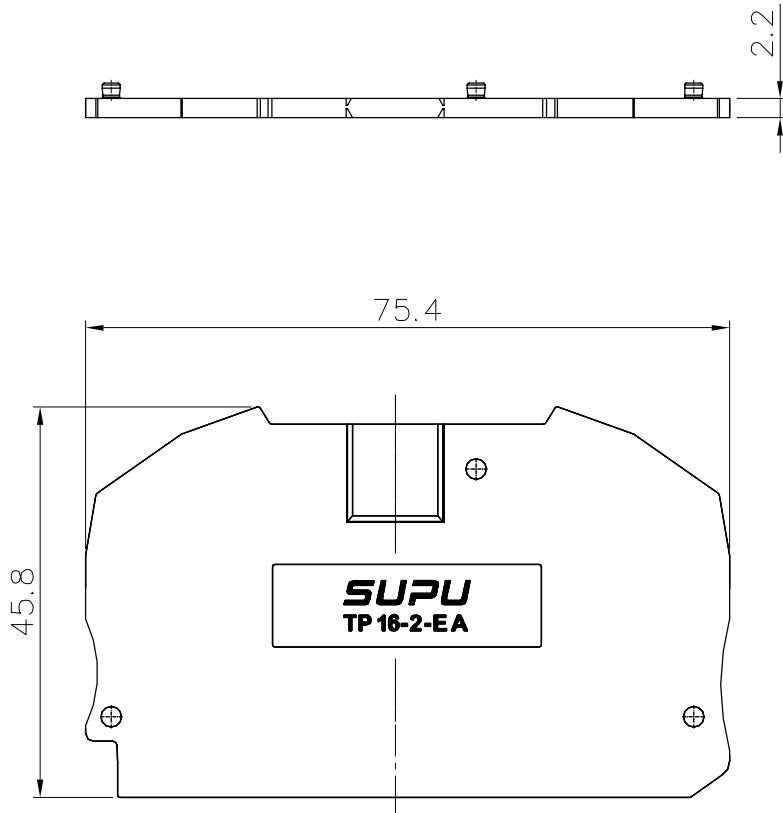

HOW TO ORDER:

TP16-2-XX-EA

Series No.

Series No.

Color:
GY: Grey
BU: Blue
OG: Orange

借通用件登记
Common Part

原图号
Old Draw. No.

底图总号
Assembly No.



Material:

Insulator	PA66	UL94 V-0
-----------	------	----------

General information:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance
- 4.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm				0.1/10	
TO	Over	Over	TO	Over	Over	Over	Over	±2°
6	10	24	30	60	100	150	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

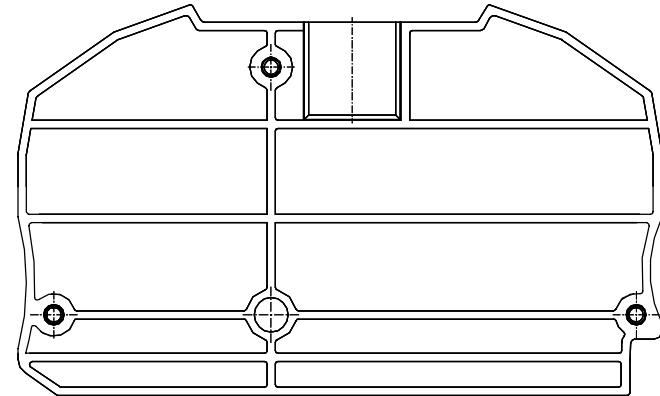

订货号 Order No.	TP16-2-XX-EA		名称 Name	TP系列直插式弹簧 16mm ² 一进一出 接线端子盖板	未注公差 Tolerance	表面 Surface	
项目 Item	签字 Signature	日期 Date	图号 Drawing No.	PRM002140	Tolerances Table		VDI21
设计 Design	cjs	05/09/19"	材料 Material	Notes	版本号 Revision Number	重量 Weight	比例 Scale
审核 Check	cw	05/09/19"	物料号 Item No.	411520006(黄色)	M0	/	1:1
工艺 Process	-	-	物料号 Item No.	411520007(橙色)	第1页/共1页 1 of 1		mm
标准化 Unify	-	-	物料号 Item No.	411520008(蓝色)	SUPU 宁波睿普电子有限公司 NINGBO SUPU ELECTRONICS CO.,LTD.		
批准 Approve	lw1	05/09/19"					