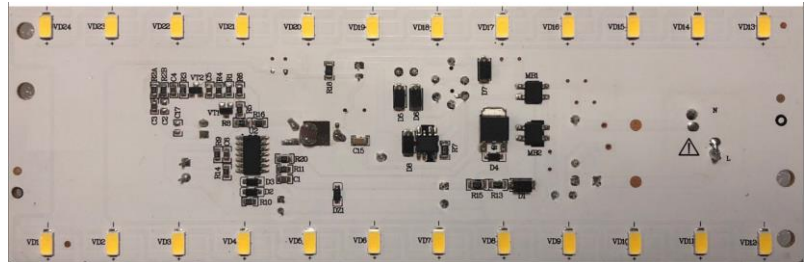


General information:

Application:
 Home corridors, passageway, home balconies, washrooms, public aisles, underpasses, parking lots, etc
 Sensing distance: 2-8 meters


Specification:

LED module:	
Power	6 W
Max. power	12 W
Max. current	300 mA
LED model	5730
LED allocation:	2P12S
LEDs	24 PCS
Color rendering index	Ra (CRI) ≥ 80
Color Temperature CCT	4000K
Sensor	microphone
LED driver:	
Input voltage	175..265 VAC
Frequency	50/60 Hz
Power factor	≥ 0.9
Efficiency	$\geq 85\%$
Input power	6.80 W
Input current	0.035 A
Sensitivity of sound sensor	≥ 50 db
Sensitivity of lighting sensor	≤ 10 Lux
Working temperature	-20..+50°C
Wires	0.75 mm ² L=20 cm
Storage Condition	-40 ~ +80°C, 10 ~ 95% RH
Dimension LxB, MM	180*60mm
Package	0.045Kg per unit, 100pcs per carton
	4.5KG N.W, 5.2KG G.W
	Carton Size: 62.5x42x18.2CM