


STELLA-FRESNEL

~25° street beam for warehouse and outdoor lighting. White version. Compatible with up to 30 mm LES size COBs.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 90.0 mm
Height	23 mm
Fastening	screw
Colour	white
Box size	480 x 280 x 300 mm
Box weight	6.1 kg
Quantity in Box	135 pcs
ROHS compliant	yes 



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
STELLA-FRESNEL	Single lens	Silicone	clear
STELLA-FRAME-WHT	Holder	PA66	white

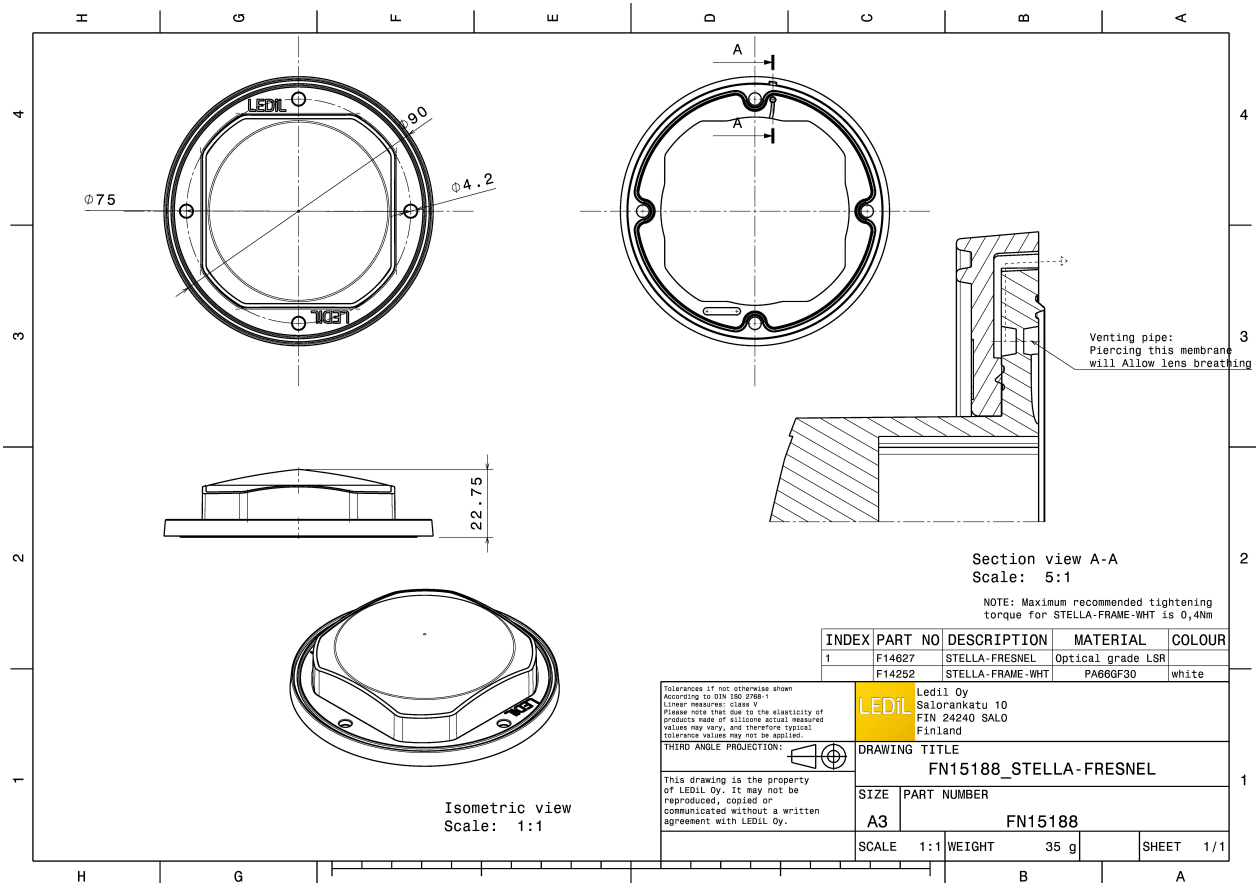



PHOTOMETRIC DATA (MEASURED):





LED V18 Gen7
FWHM 32.0°
Efficiency 87 %
Peak intensity 1.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 439 Typ L3

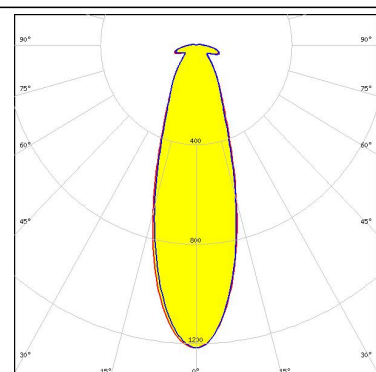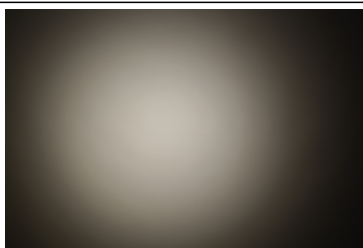

LED Vero SE 18
FWHM 32.0°
Efficiency 88 %
Peak intensity 1.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

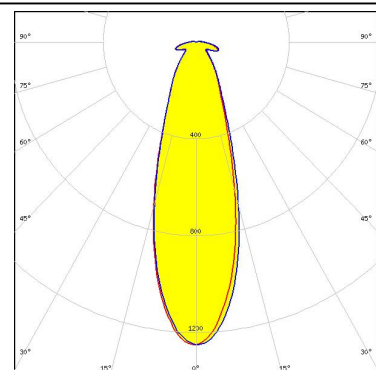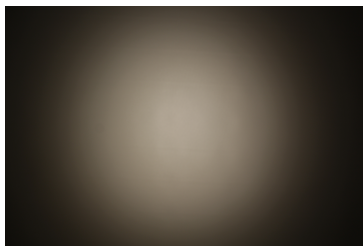


LED VERO18
FWHM 32.0°
Efficiency 88 %
Peak intensity 1.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

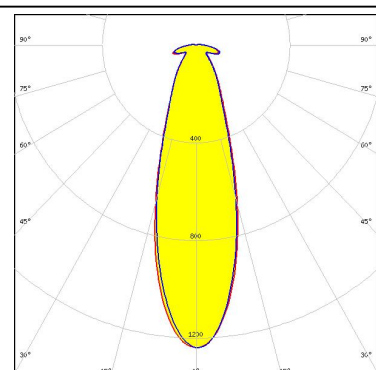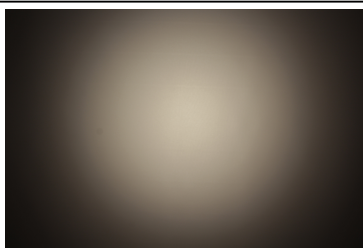

CITIZEN



LED CLL04x/CLU04x
FWHM 36.0°
Efficiency 86 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

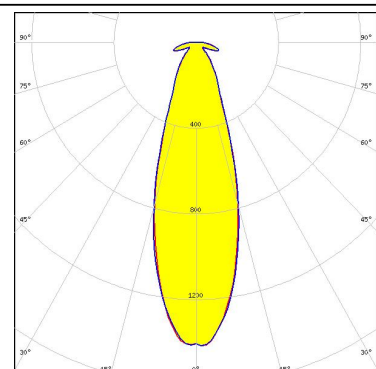



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM 24.0°
 Efficiency 86 %
 Peak intensity 1.900 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

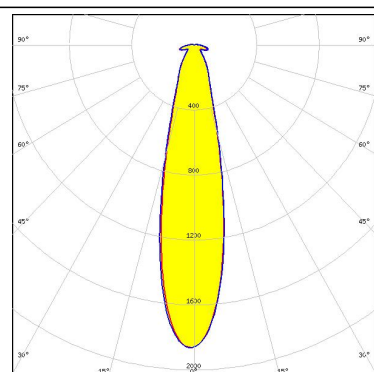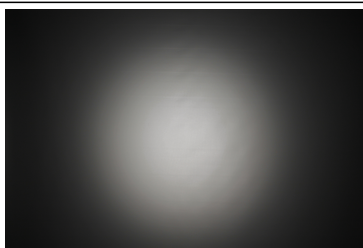

LED CXA/B 25xx
 FWHM 32.0°
 Efficiency 87 %
 Peak intensity 1.300 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 439 Typ L3

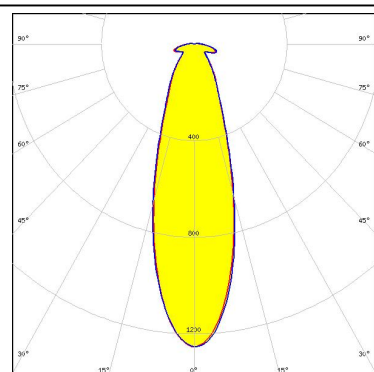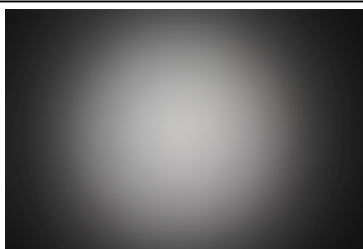

LED CXA/B 25xx
 FWHM 31.0°
 Efficiency 86 %
 Peak intensity 1.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

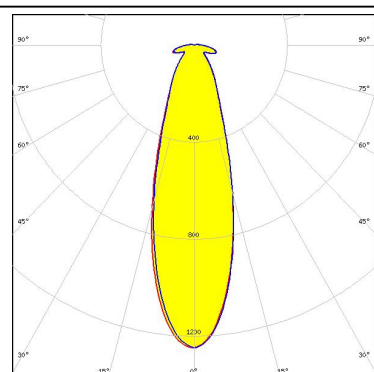
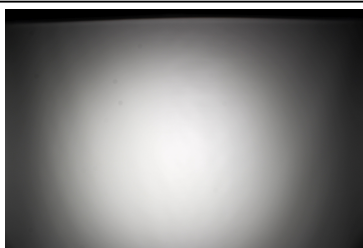


LED LUXEON CoB 1216/1812
 FWHM 39.0°
 Efficiency 86 %
 Peak intensity 0.930 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



PHOTOMETRIC DATA (MEASURED):





LED CxM-22 (28x28)
 FWHM 39.0°
 Efficiency 88 %
 Peak intensity 0.940 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 431 Typ L3

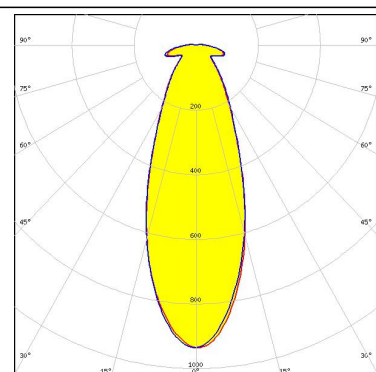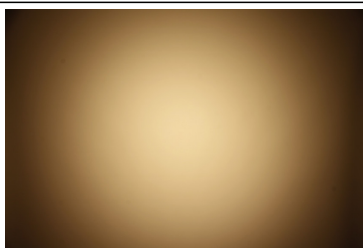



LED COB J-Type
 FWHM 26.0°
 Efficiency 87 %
 Peak intensity 1.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

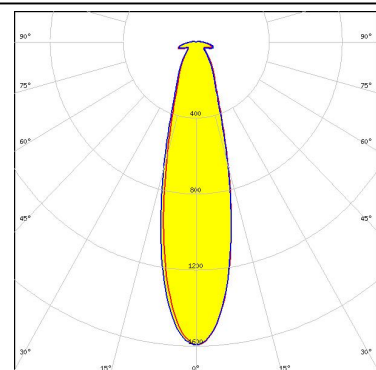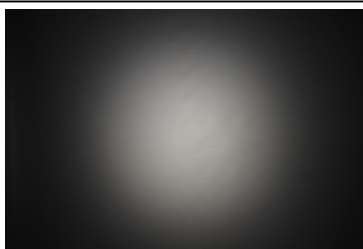

LED Fortimo SLM L19 CoB
 FWHM 31.0°
 Efficiency 87 %
 Peak intensity 1.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 431 Typ Z1

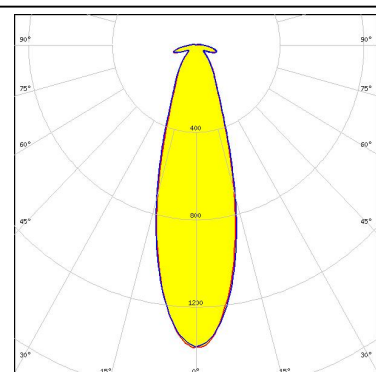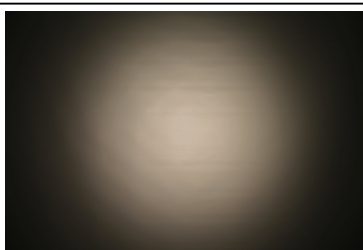



LED Fortimo SLM L23 CoB
 FWHM 35.0°
 Efficiency 87 %
 Peak intensity 1.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 431 Typ Z1

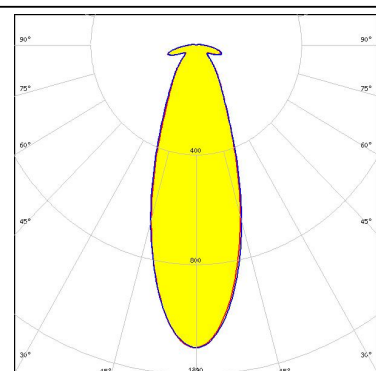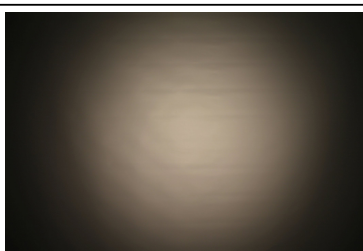

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED COB D Series LES 14.5 mm
 FWHM 28.0°
 Efficiency 86 %
 Peak intensity 1.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

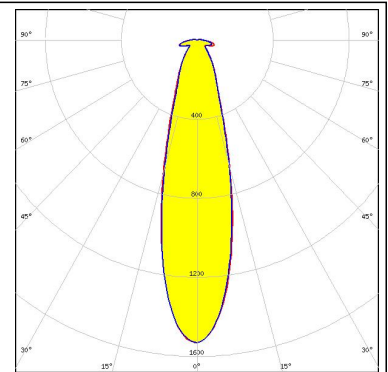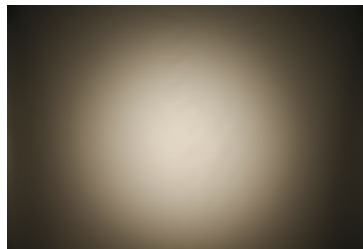


SAMSUNG

LED COB D Series LES 22 mm
 FWHM 38.0°
 Efficiency 86 %
 Peak intensity 0.920 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

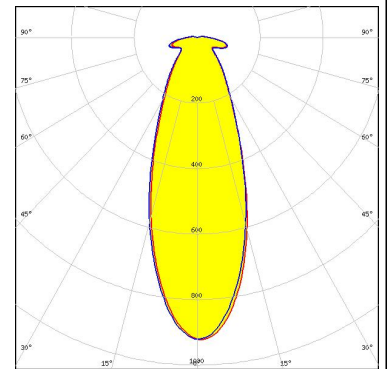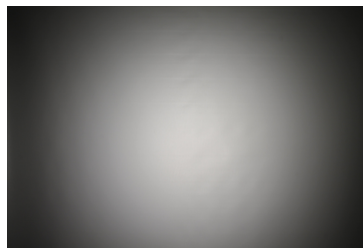


SEOUL SEMICONDUCTOR

LED MJT COB LES 14.5
 FWHM 28.0°
 Efficiency 86 %
 Peak intensity 1.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 IDEAL: 50-2103CT

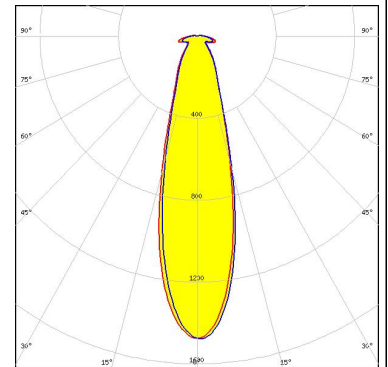

SEOUL SEMICONDUCTOR


LED MJT COB LES 22
 FWHM 36.0°
 Efficiency 87 %
 Peak intensity 0.980 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 IDEAL: 50-2204CT

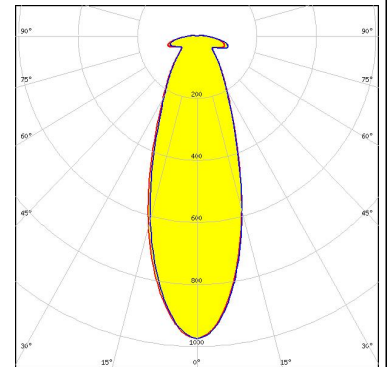


PHOTOMETRIC DATA (SIMULATED):




LED V10 Gen7
FWHM 17.0°
Efficiency 85 %
Peak intensity 4.780 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 486 Typ L1

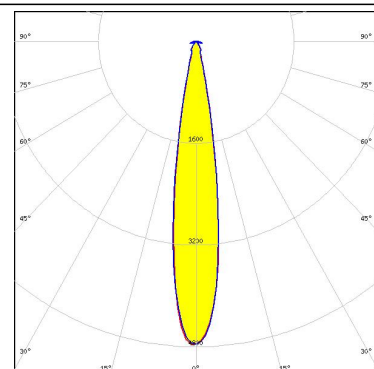


LED V13 Gen7
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

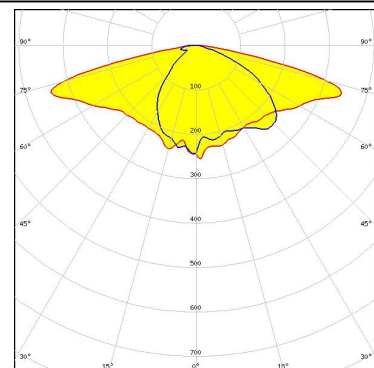

LED V18 Gen7
FWHM 26.0°
Efficiency 85 %
Peak intensity 1.970 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2350

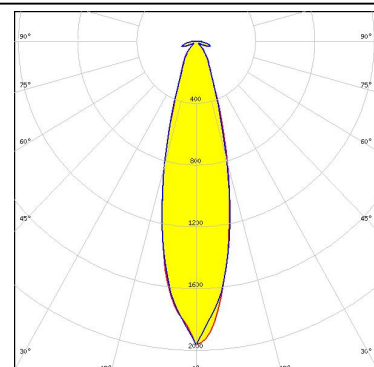


LED V22 Gen7
FWHM 30.0°
Efficiency 84 %
Peak intensity 1.583 cd/lm
LEDs/each optic 1
Light colour White
Required components:
IDEAL: 50-2204CT

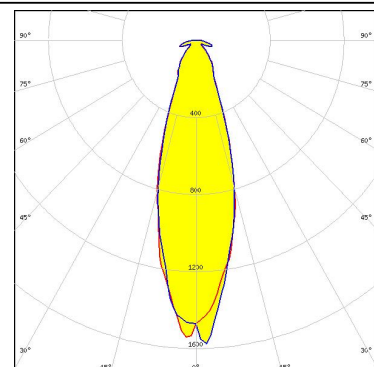


PHOTOMETRIC DATA (SIMULATED):



LED CXA/B 25xx
FWHM 24.0°
Efficiency 86 %
Peak intensity 2.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

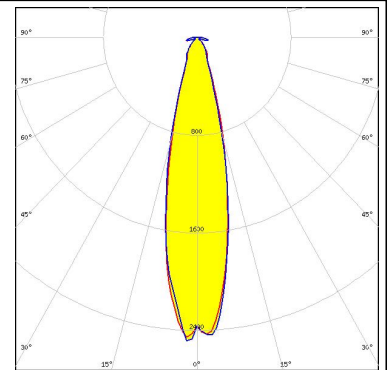

LED LUXEON CoB 1208
FWHM 22.0°
Efficiency 85 %
Peak intensity 2.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:

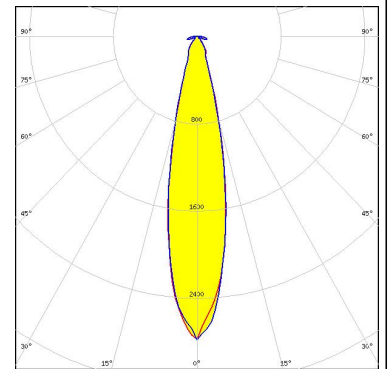

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)