

## STELLA-G2-T2

IESNA Type II (medium) beam, applicable for European P-class standard pedestrian lighting and M-class roads.

### **TECHNICAL SPECIFICATIONS:**

**Dimensions** Ø 90.0 mm

Height 27 mm

Fastening socket

Colour black

480 x 280 x 300 mm Box size

Box weight 7.9 kg Quantity in Box 135 pcs

ROHS compliant ves 🕕




### **MATERIAL SPECIFICATIONS:**

Component	Туре	Material	Colour
STELLA-G2-T2	Single lens	Silicone	clear
STELLA-FRAME	Holder	PA66	black

1/6



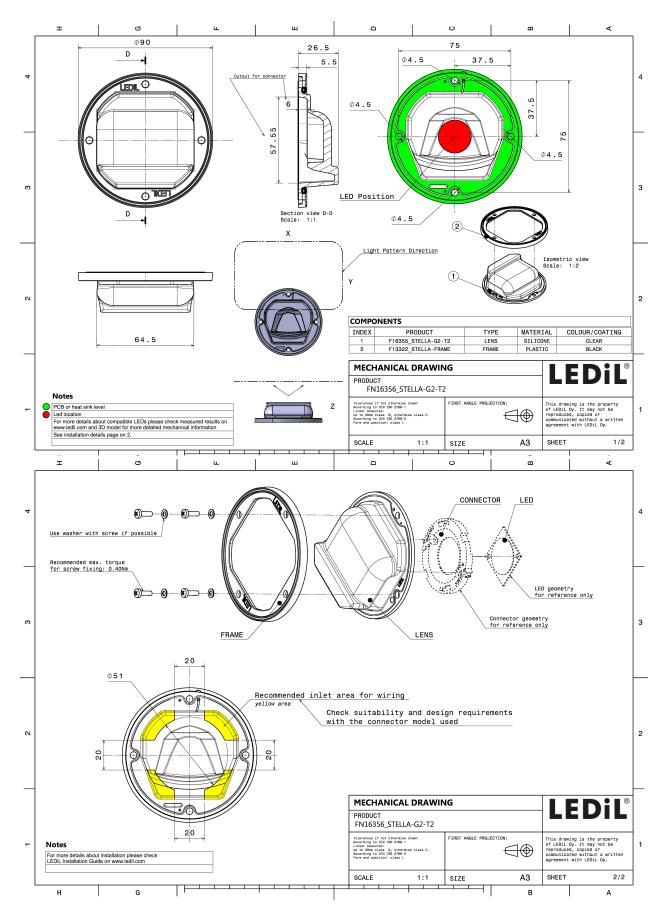

Last update: 20/12/2018

Subject to change without prior notice

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

## PHOTOMETRIC DATA (MEASURED):

bridgelux. LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required compor TE: 2213480-1	White	29° 29° 29° 29° 29° 29° 29° 29° 29° 29°
bridgelux. LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required compor	White	30° 30° 30° 30° 30° 30° 30° 30° 30° 30°
LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required compor Bender Wirth:	White ents:	20° 20° 20° 20° 20° 20° 20° 20° 20° 20°
CREE \$\(\) LED FWHM Efficiency Peak intensity LEDs/each optic Light colour Required compon	CXA/B 25xx Asymmetric 87 % 0.590 cd/lm 1 White	90° 90° 90° 90° 90° 90° 90° 90° 90° 90°




## PHOTOMETRIC DATA (MEASURED):

## **SAMSUNG**

LED COB D Series LES 22 mm

FWHM Asymmetric Efficiency 86 % Peak intensity 0.450 cd/lm

LEDs/each optic 1
Light colour White
Required components:




## PHOTOMETRIC DATA (SIMULATED):

## **CITIZEN**

LED CLL03x/CLU03x
FWHM Asymmetric
Efficiency 87 %
Peak intensity 0.760 cd/lm


LEDs/each optic 1
Light colour White
Required components:



## **CITIZEN**

LED CLL04x/CLU04x
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.460 cd/lm

LEDs/each optic 1
Light colour White
Required components:



Published: 30/05/2018



#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

## Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

6/6

www.ledil.com/ where\_to\_buy

Last update: 20/12/2018 Subject to change without prior notice Published: 30/05/2018