




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

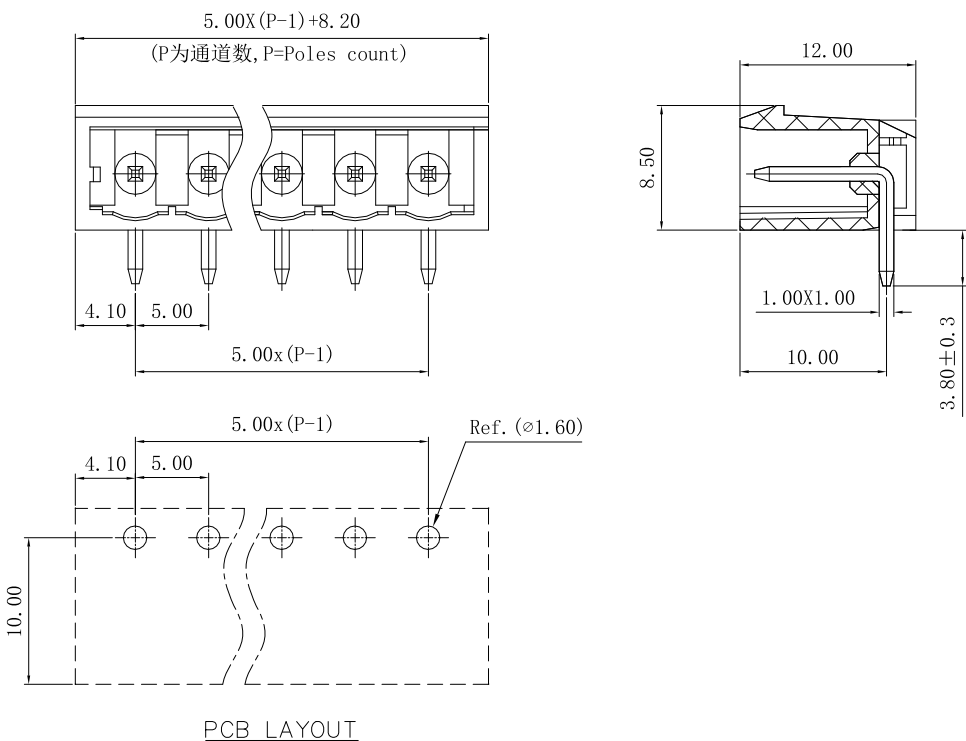

IEC 额定数据/IEC Rated data			
过电压类别/Surge voltage category	III	III	II
污染等级/Pollution degree	3	2	2
额定电压/Rated voltage	320V	320V	630V
额定脉冲耐受电压/Rated surge voltage	4KV	4KV	4KV
额定电流/Rated current	12A	12A	12A
UL 额定数据/UL Rated data			
额定电流/Rated current	15A	—	10A
额定电压/Rated voltage	300V	—	300V
其他信息/Other information			
塑件/Housing	PA66		
触点材料/Contact	铜合金/Copper alloy		
镀层/Coating	锡/Sn plated		
阻燃等级/Flame retardant rating	UL94-V0		
工作温度/Operating temperature	-40℃ - +105℃		
认证/Approval			
制图: 金辰义	审核: 巴宇辉	日期: 2023/12/13	

订货信息 Order Info

订货号 PART NUMBER	通道数 NO. OF POS	颜色 COLOR
450302	2	灰色 Gray
450303	3	
450304	4	
450305	5	
.....	
450324	24	

未注公差表参照GB/T14486

0-3	>3-6	>6-10	>10-14	>14-18	
±0.08	±0.09	±0.10	±0.12	±0.14	
>18-24	>24-30	>30-40	>40-50	>50-65	>65-80
±0.16	±0.18	±0.21	±0.24	±0.28	±0.32
>80-100	>100-120	>120-140	>140-160	>160-180	>180-200
±0.36	±0.41	±0.46	±0.51	±0.56	±0.62
				角度	
				±2°	

	Rev. 01	Name
单位/Unit	mm	4503XX系列2-24位弯型焊针插座 4503XX Series 2-24 Poles right angle pin