Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.
未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1	DCN0006231	图纸更新	董方正	2020/1/07

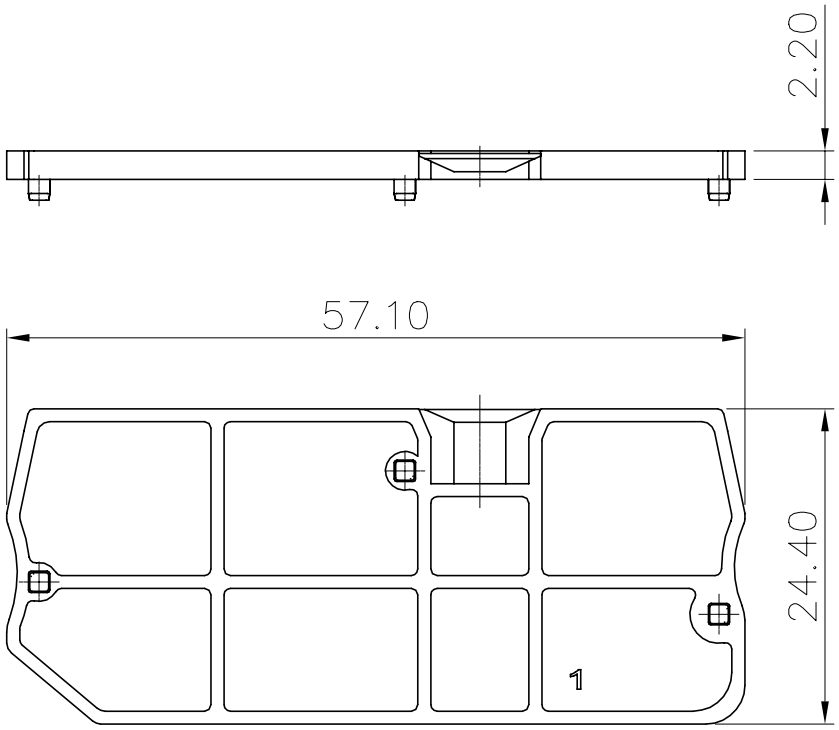

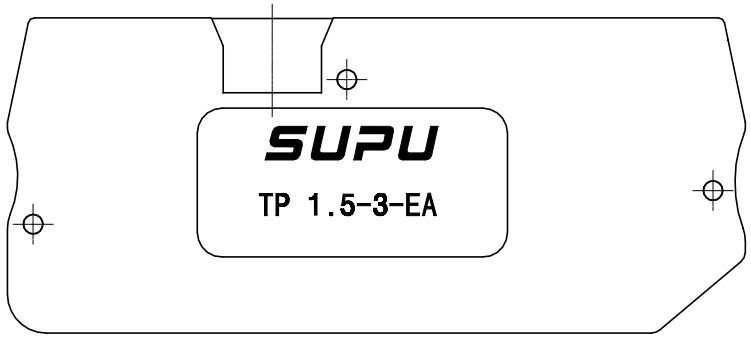

HOW TO ORDER:

TP1.5−3−XX−EA

- TP1.5−3: Sereies No.
- XX: Color: GY: Grey; BU: Blue; OG: Orange
- EA: Sereies No.

NOTES:

Material:

Insulator	PA66	UL94 V−0

General information:

1. Dimension shall be interpreted per ASME Y14.5−2009
2. Operating temperature: −40℃~+105℃
3. RoHS Compliance
4. Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					− ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

订货号 Order No.	TP1.5-3-XX-EA		名 称 Name	TP系列直插式弹簧 1.5mm² 一进两出 接线端子-端板	未注公差 Tolerance		表面 Surface
项 目 Item	签 字 Signature	日 期 Date			Tolerances Table		VDI21
设 计 Design	dfz	11/14/19	图 号 Drawing No.	PRM001414	阶段标记 Progress	版本 Revision	重量 Weight / 比例 Scale
审 核 Check	cw	11/14/19	材 料 Material	NOTES	M	1	/ 1:1
工 艺 Process	-	-	物料号 Item No.	412200005	第1页/共1页 1 of 1		mm
标准化 Unify	-	-		412200006	SUPU 宁波速普电子有限公司		
批 准 Approve	lwl	11/14/19		412200007	NINGBO SUPU ELECTRONICS CO.,LTD.		

借通用件登记 Common Part

原图号 Old Draw. No.

底图总号 Assembly No.