

## OLIVIA-S

~20° spot beam


### TECHNICAL SPECIFICATIONS:

Dimensions	Ø 70.0 mm
Height	22.6 mm
Fastening	screw
Colour	clear
Box size	
Box weight	0 kg
Quantity in Box	pcs
ROHS compliant	yes ⓘ



### MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
OLIVIA-S	Single lens	PC	clear
OLIVIA-HLD	Holder	PC	clear

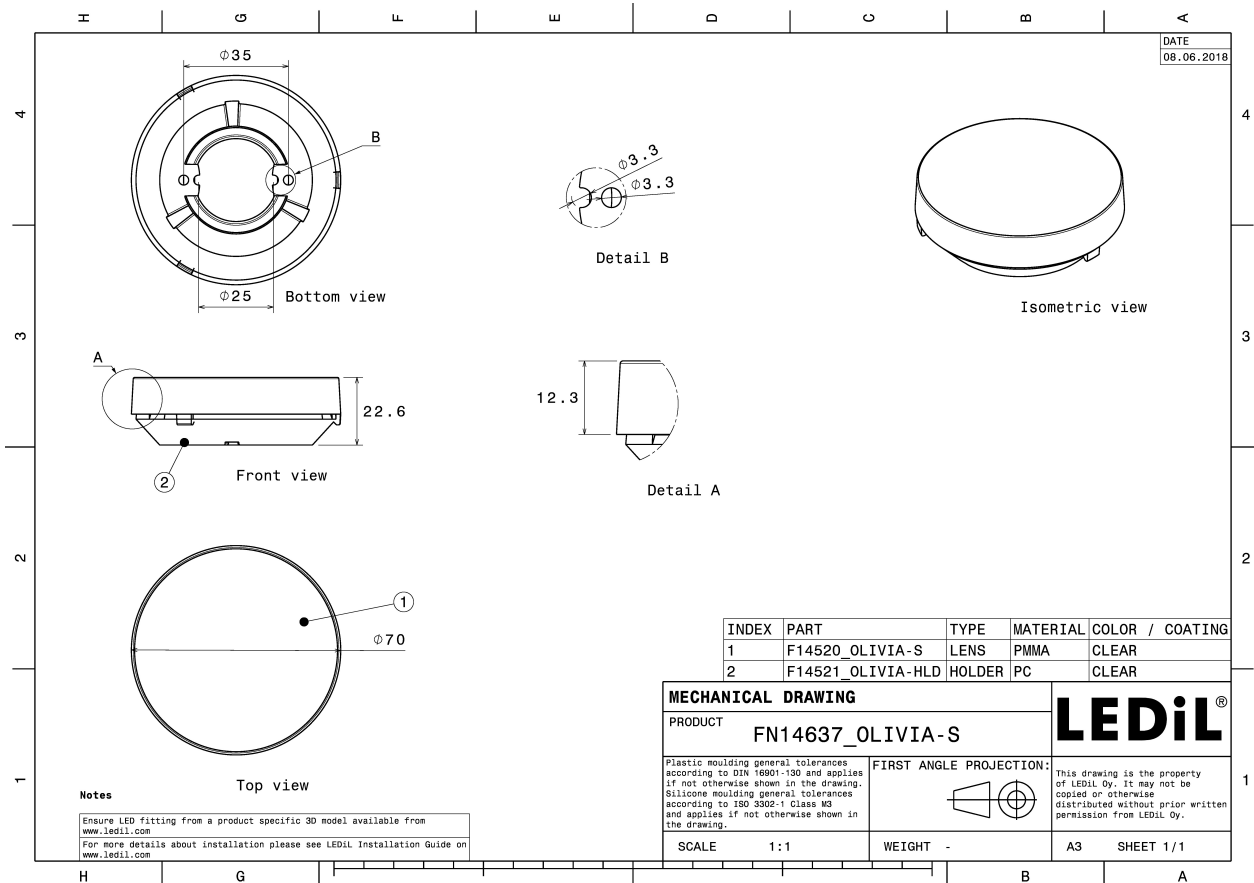

#### PHOTOMETRIC DATA (MEASURED):


bridgelux<sup>®</sup>

LED V10 Gen6  
FWHM 18.0°  
Efficiency 75 %  
Peak intensity 4.400 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.6214

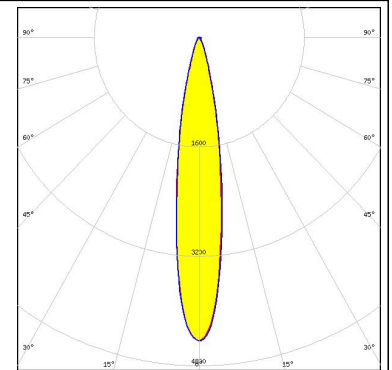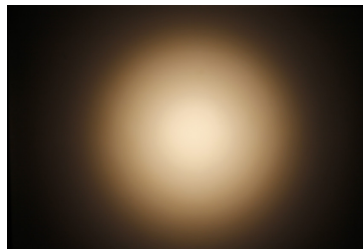



bridgelux<sup>®</sup>

LED V10 Gen7  
FWHM 18.0°  
Efficiency 75 %  
Peak intensity 4.500 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.6060

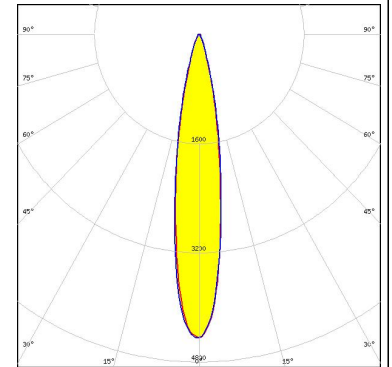



bridgelux<sup>®</sup>

LED V15 Gen6  
FWHM 32.0°  
Efficiency 79 %  
Peak intensity 2.200 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

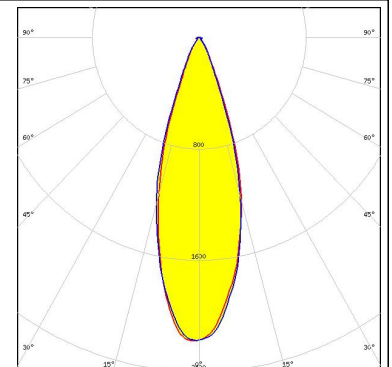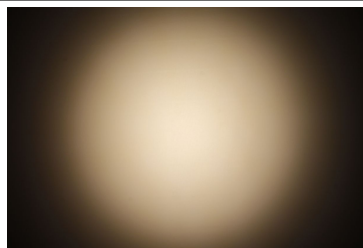

bridgelux<sup>®</sup>



LED V15 Gen6  
FWHM 28.0°  
Efficiency 74 %  
Peak intensity 1.900 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2224

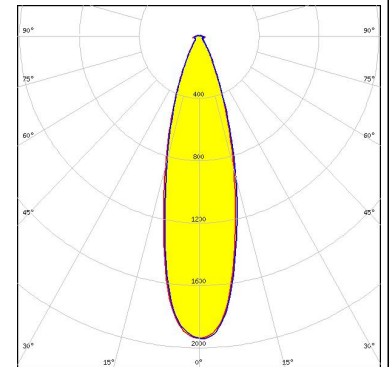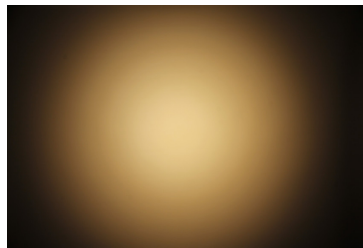



#### PHOTOMETRIC DATA (MEASURED):





LED V18 Gen6  
FWHM 31.0°  
Efficiency 73 %  
Peak intensity 1.600 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2274

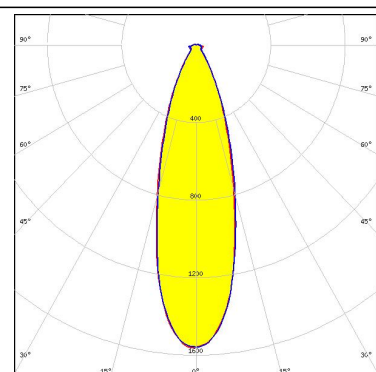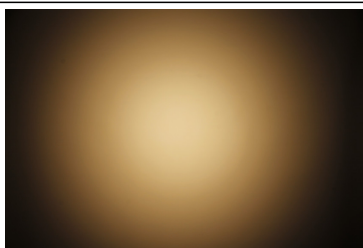



LED V18 Gen6  
FWHM 37.0°  
Efficiency 78 %  
Peak intensity 1.700 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

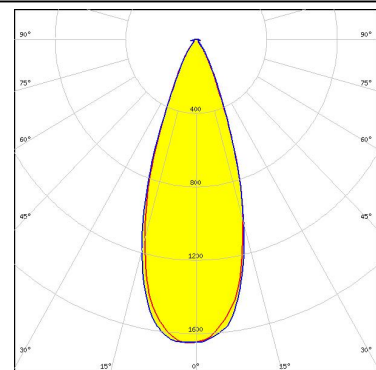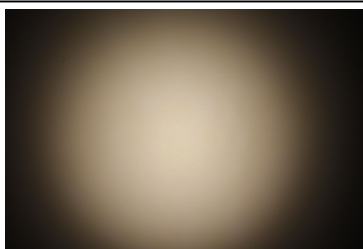

LED V22 Gen6  
FWHM 35.0°  
Efficiency 71 %  
Peak intensity 1.100 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8102/G2

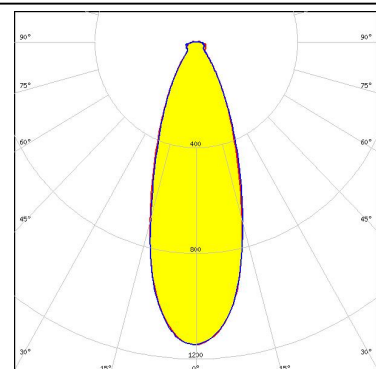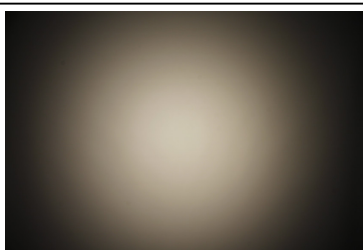

LED Vero SE 13  
FWHM 24.0°  
Efficiency 77 %  
Peak intensity 3.100 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

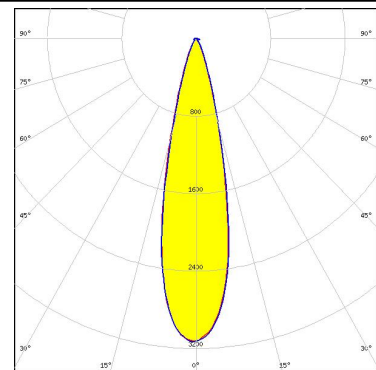
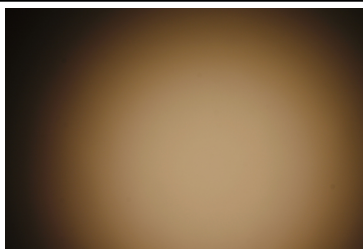




## PHOTOMETRIC DATA (MEASURED):



bridgelux.

LED Vero SE 18  
FWHM 33.0°  
Efficiency 76 %  
Peak intensity 1.800 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

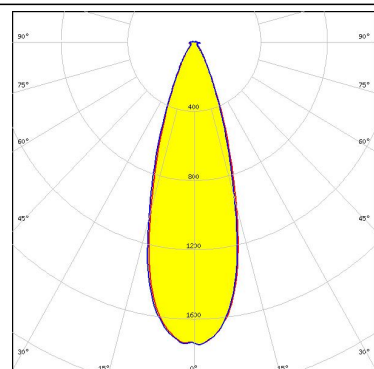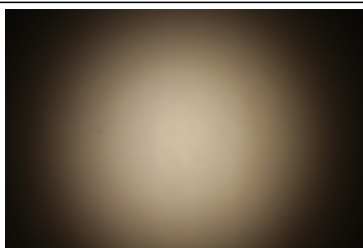



bridgelux.

LED Xenio Point 13mm  
FWHM 25.0°  
Efficiency 80 %  
Peak intensity 3.240 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

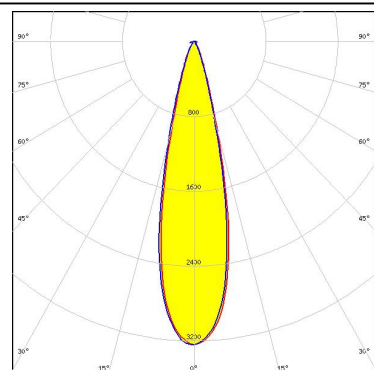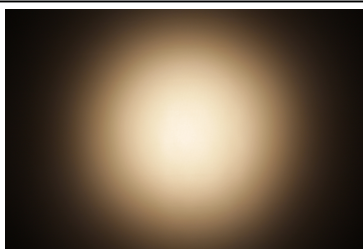



bridgelux.

LED Xenio Point 18mm  
FWHM 35.0°  
Efficiency 79 %  
Peak intensity 1.760 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

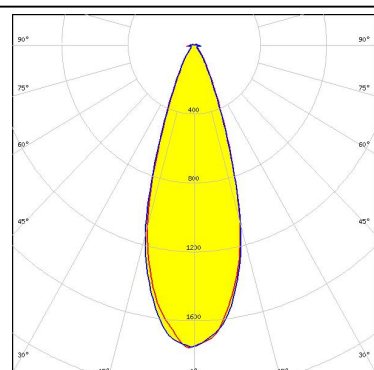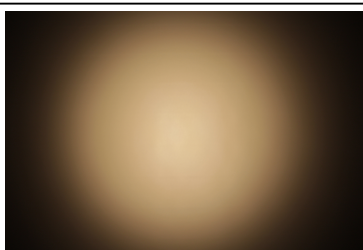

## CITIZEN



LED CLL03x/CLU03x  
FWHM 23.0°  
Efficiency 76 %  
Peak intensity 2.700 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8101/G2

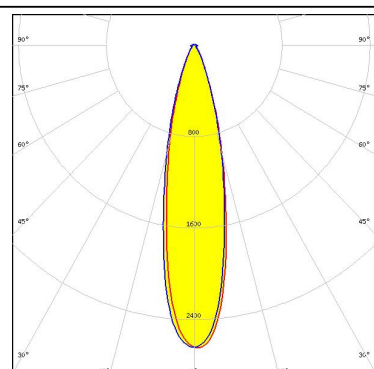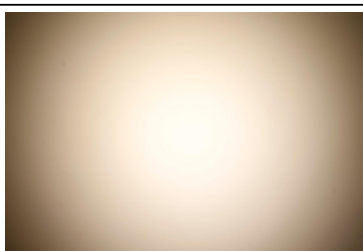

### PHOTOMETRIC DATA (MEASURED):



#### CITIZEN

LED CLL03x/CLU03x  
FWHM 26.0°  
Efficiency 76 %  
Peak intensity 2.400 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8101/G2

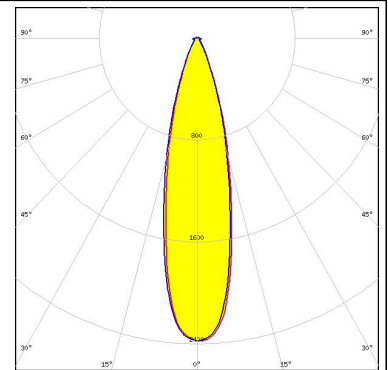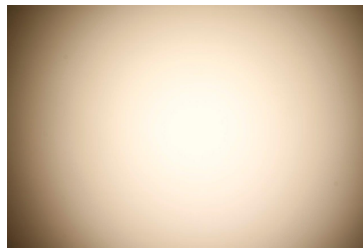



#### CITIZEN

LED CLU700/701  
FWHM 19.0°  
Efficiency 74 %  
Peak intensity 4.400 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.6060

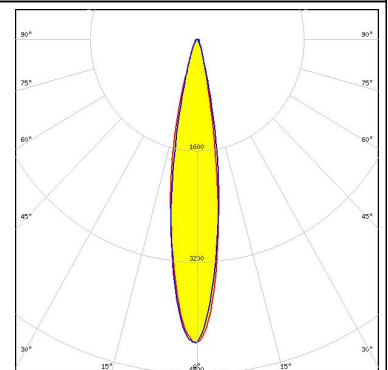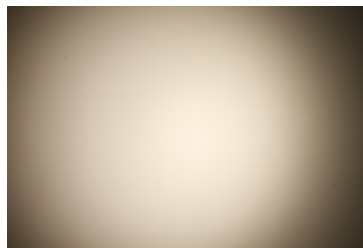



#### CITIZEN

LED CLU700/701  
FWHM 14.0°  
Efficiency 75 %  
Peak intensity 7.000 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8100/G2

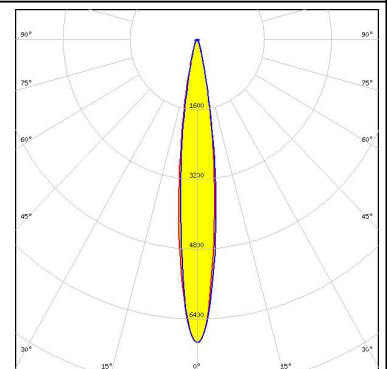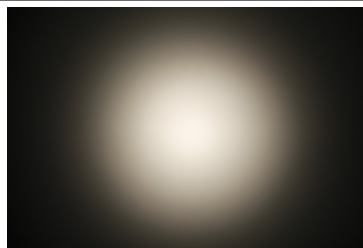

#### CITIZEN



LED CLU720/721  
FWHM 20.0°  
Efficiency 76 %  
Peak intensity 3.600 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8101/G2

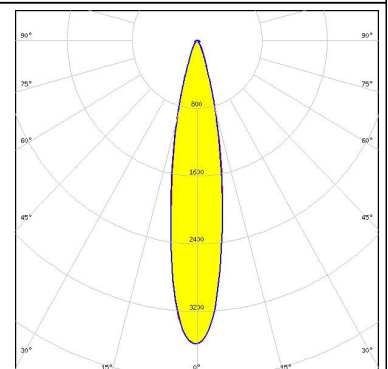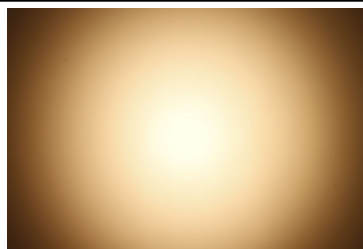

### PHOTOMETRIC DATA (MEASURED):



#### CITIZEN

LED CLU720/721  
FWHM 20.0°  
Efficiency 74 %  
Peak intensity 3.300 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
TE: 2213254-2

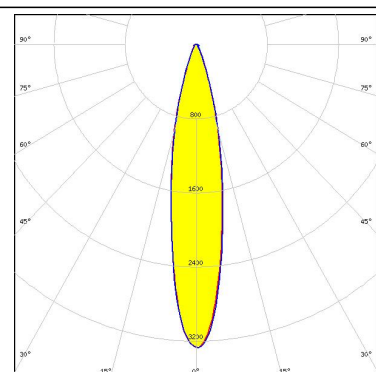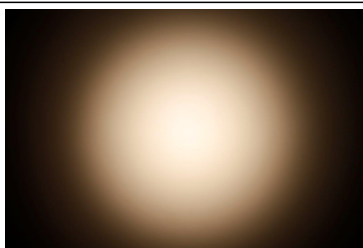


#### CITIZEN

LED CLU720/721  
FWHM 21.0°  
Efficiency 74 %  
Peak intensity 3.200 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2021

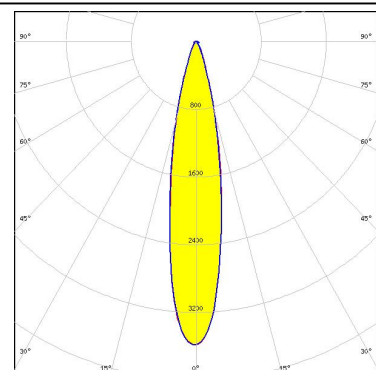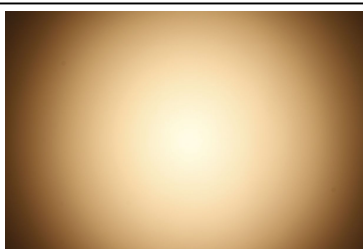



#### CREE

LED CXA/B 13xx  
FWHM 14.0°  
Efficiency 74 %  
Peak intensity 7.000 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.6120

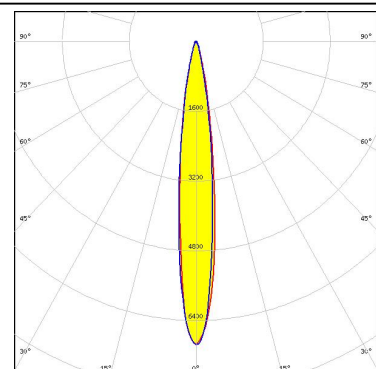

#### CREE



LED CXA/B 1816 & CXA/B 1820 & CXA 1850  
FWHM 21.0°  
Efficiency 76 %  
Peak intensity 3.300 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2131

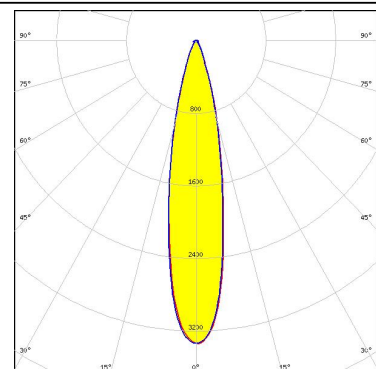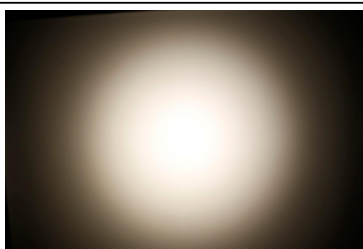



#### PHOTOMETRIC DATA (MEASURED):





LED CXA/B 25xx  
FWHM 29.0°  
Efficiency 74 %  
Peak intensity 1.700 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8401/G2

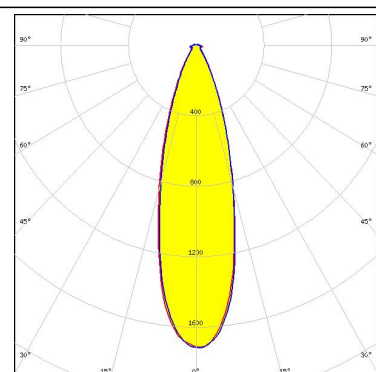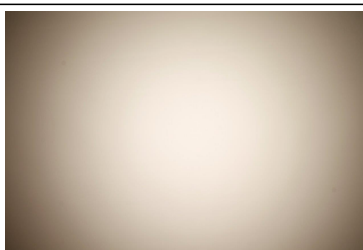



LED CXA/B 25xx  
FWHM 29.0°  
Efficiency 73 %  
Peak intensity 1.600 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
TE: 2213407-2

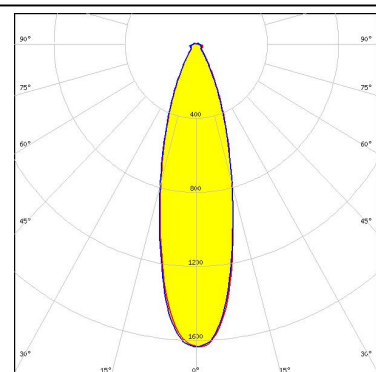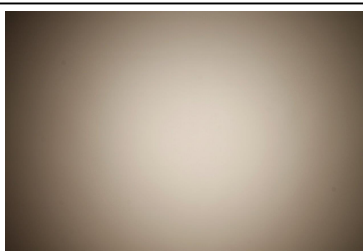

LED CXA/B 25xx  
FWHM 29.0°  
Efficiency 74 %  
Peak intensity 1.700 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2040

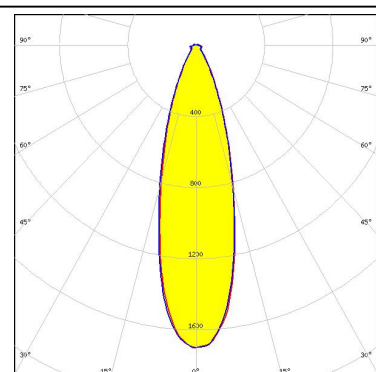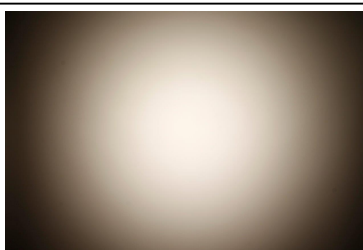



LED LUXEON CoB 1204/1205  
FWHM 26.0°  
Efficiency 77 %  
Peak intensity 3.100 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 432 Typ Z1

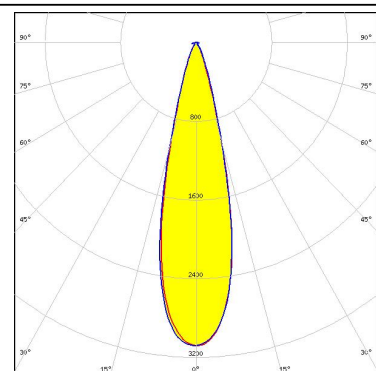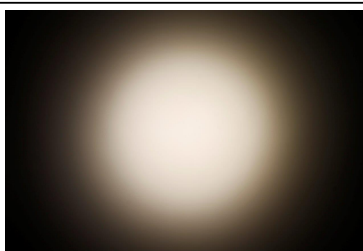



### PHOTOMETRIC DATA (MEASURED):





LED LUXEON CoB 1204/1205  
FWHM 23.0°  
Efficiency 76 %  
Peak intensity 2.800 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8301/G2

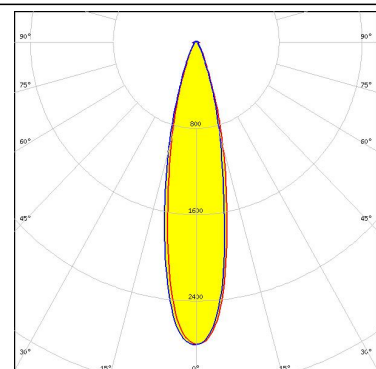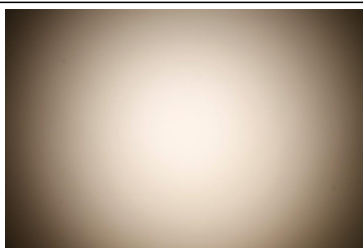



LED LUXEON CoB 1208  
FWHM 29.0°  
Efficiency 77 %  
Peak intensity 2.400 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 432 Typ Z1

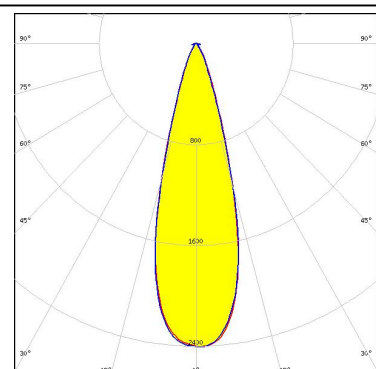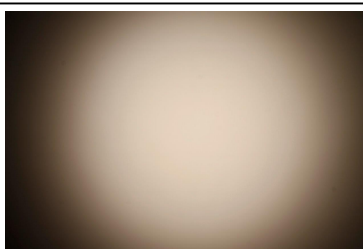

LED LUXEON CoB 1208  
FWHM 27.0°  
Efficiency 74 %  
Peak intensity 2.100 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8301/G2

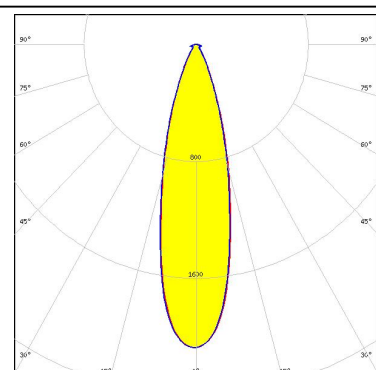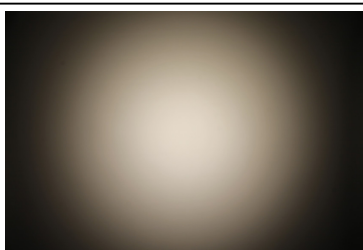

LED LUXEON CoB 1211  
FWHM 32.0°  
Efficiency 73 %  
Peak intensity 1.480 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2030

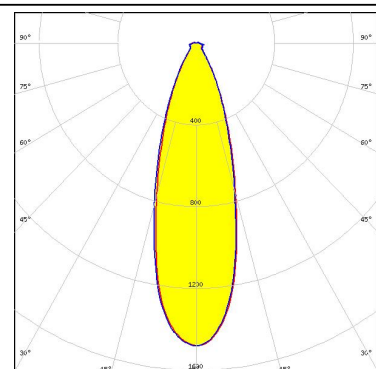
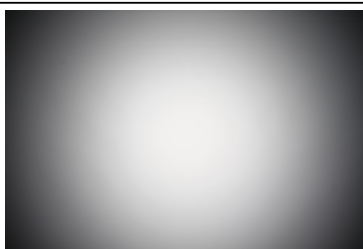






### PHOTOMETRIC DATA (MEASURED):





LED LUXEON CoB 1216/1812  
FWHM 37.0°  
Efficiency 71 %  
Peak intensity 1.080 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2030

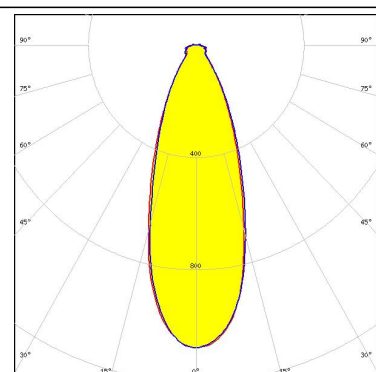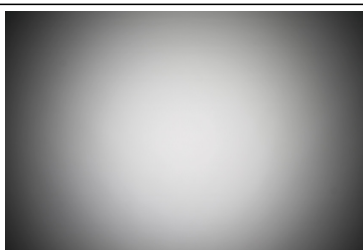



LED LUXEON CoB Compact  
FWHM 15.0°  
Efficiency 75 %  
Peak intensity 6.100 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.6180

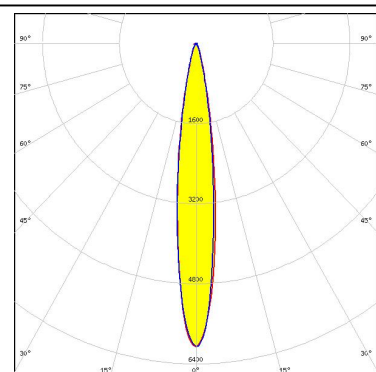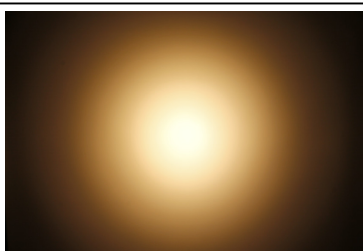

LED Fortimo SLM L09 + SLM holder (PI)  
FWHM 18.0°  
Efficiency 78 %  
Peak intensity 4.950 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

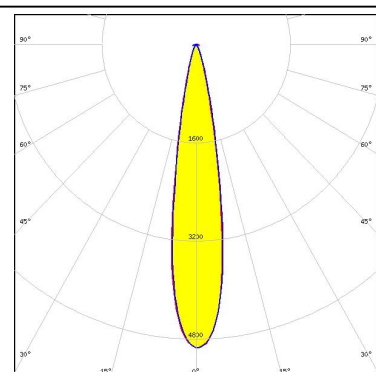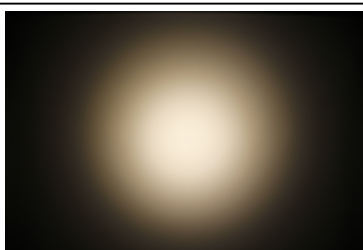

LED Fortimo SLM L13 + SLM holder (PI)  
FWHM 25.0°  
Efficiency 76 %  
Peak intensity 2.820 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

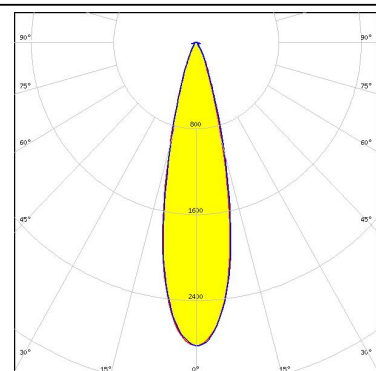
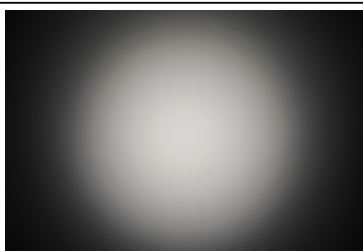




### PHOTOMETRIC DATA (MEASURED):



#### PHILIPS

LED Fortimo SLM L15 + SLM holder (PI)  
FWHM 28.0°  
Efficiency 76 %  
Peak intensity 2.230 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

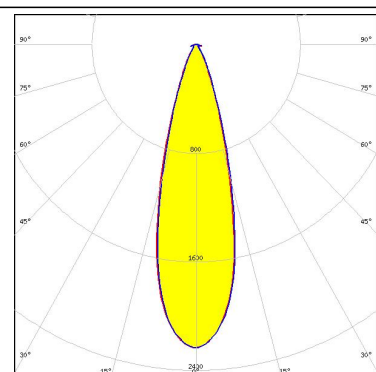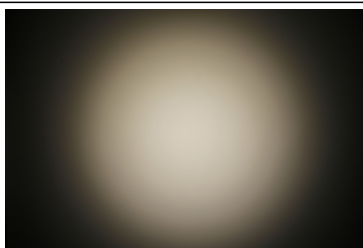



#### PHILIPS

LED Fortimo SLM L19 + SLM holder (PI)  
FWHM 35.0°  
Efficiency 75 %  
Peak intensity 1.500 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

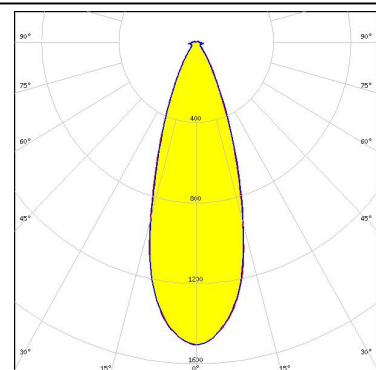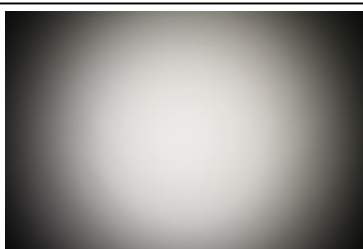



#### PHILIPS

LED Fortimo SLM L23 CoB  
FWHM 39.0°  
Efficiency 72 %  
Peak intensity 1.100 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

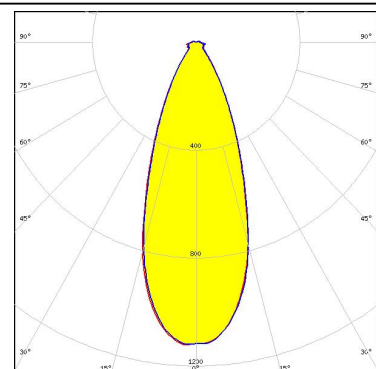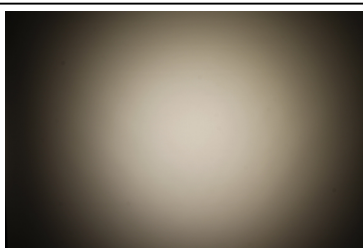

#### SAMSUNG



LED COB D Series LES 14.5 mm  
FWHM 26.0°  
Efficiency 76 %  
Peak intensity 2.220 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
A.A.G. STUCCHI: 8101/G2

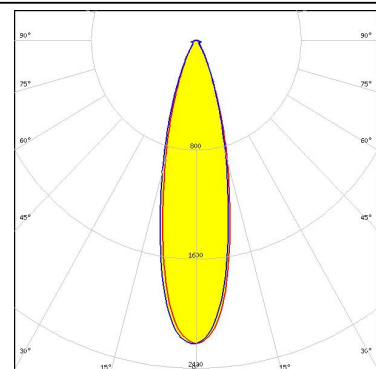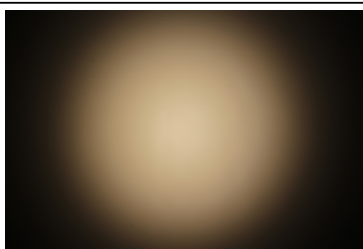

#### PHOTOMETRIC DATA (MEASURED):



#### SAMSUNG

LED COB D Series LES 14.5 mm  
 FWHM 26.0°  
 Efficiency 76 %  
 Peak intensity 2.220 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 BJB: 47.319.2021

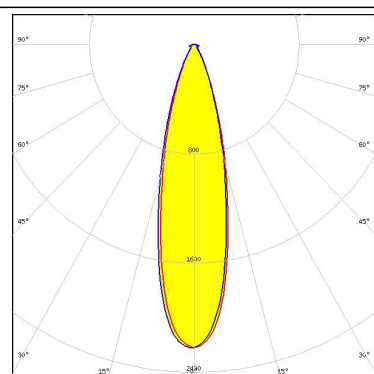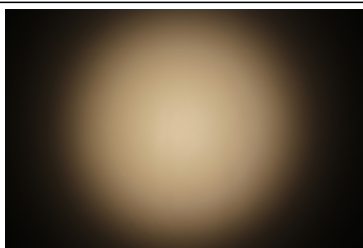



#### SAMSUNG

LED COB D Series LES 9.8 mm  
 FWHM 18.0°  
 Efficiency 77 %  
 Peak intensity 4.400 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 A.A.G. STUCCHI: 8100/G2

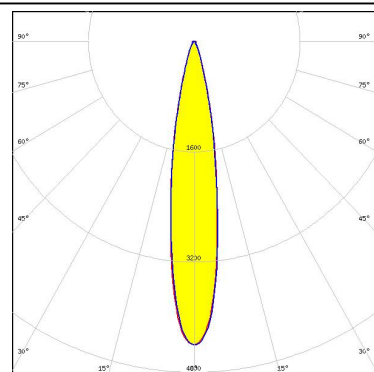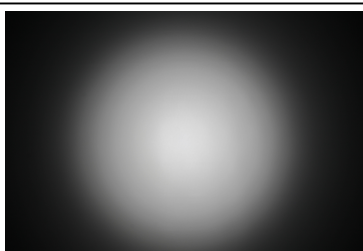


#### SAMSUNG

LED COB D Series LES 9.8 mm  
 FWHM 18.0°  
 Efficiency 77 %  
 Peak intensity 4.400 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 BJB: 47.319.6060

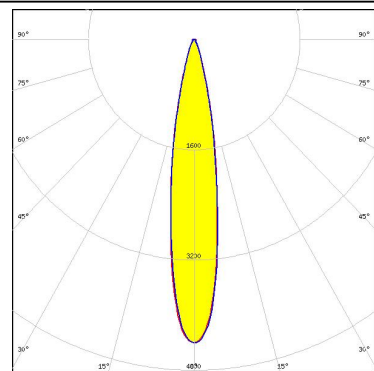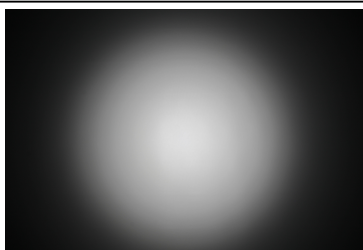

#### SAMSUNG



LED SLE-013  
 FWHM 21.0°  
 Efficiency 75 %  
 Peak intensity 3.100 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

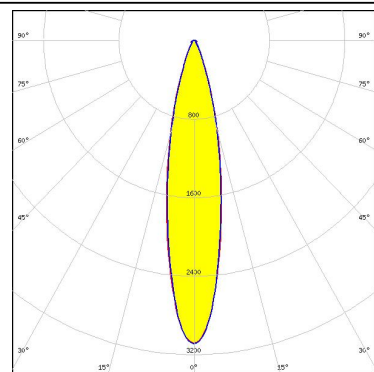

### PHOTOMETRIC DATA (MEASURED):



#### SAMSUNG

LED SLE-026/033/040  
FWHM 29.0°  
Efficiency 74 %  
Peak intensity 1.740 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

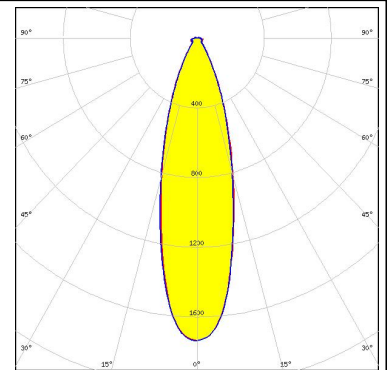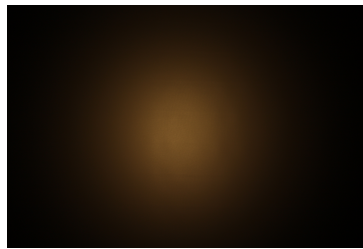



#### SHARP

LED Mini Zenigata (GW6BM)  
FWHM 17.0°  
Efficiency 75 %  
Peak intensity 4.800 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.6180

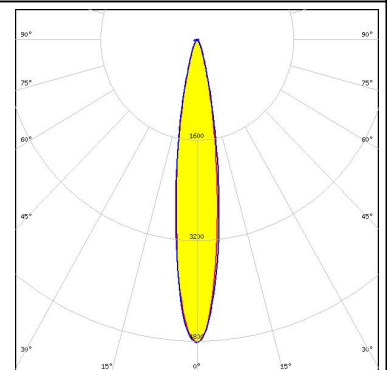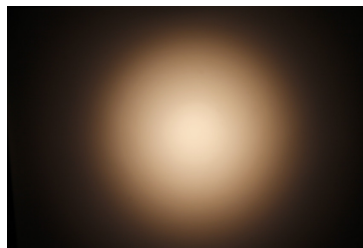

#### TRIDONIC


LED SLE G5 LES6  
FWHM 15.0°  
Efficiency 74 %  
Peak intensity 5.800 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.6060

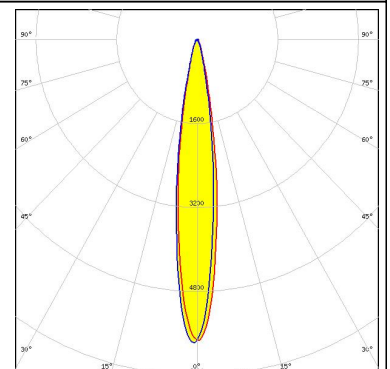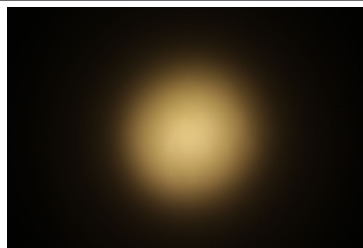

### PHOTOMETRIC DATA (SIMULATED):


bridgelux.

LED V13 Gen7  
FWHM 26.0°  
Efficiency 93 %  
Peak intensity 3.200 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2021

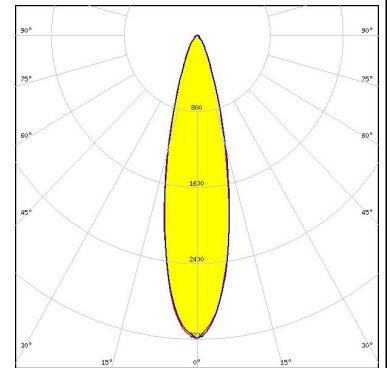


bridgelux.

LED V13 Gen7  
FWHM 26.0°  
Efficiency 94 %  
Peak intensity 3.660 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
TE: 2213254-1

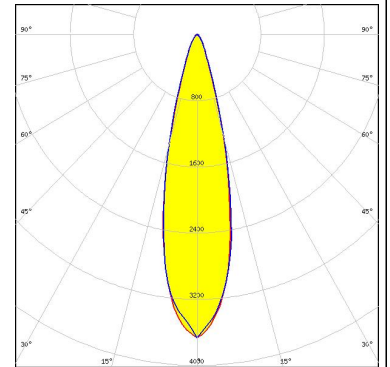


bridgelux.

LED V13 Gen7  
FWHM 26.0°  
Efficiency 95 %  
Peak intensity 3.750 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 477 Typ L1

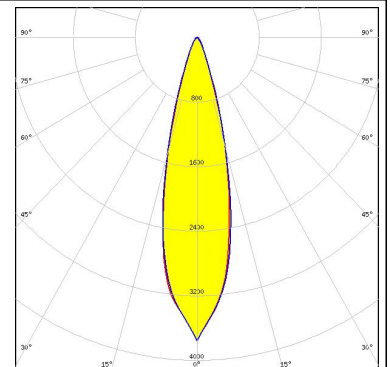

bridgelux.


LED V13 Gen7  
FWHM 24.0°  
Efficiency 91 %  
Peak intensity 3.240 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
TE: 2213254-2

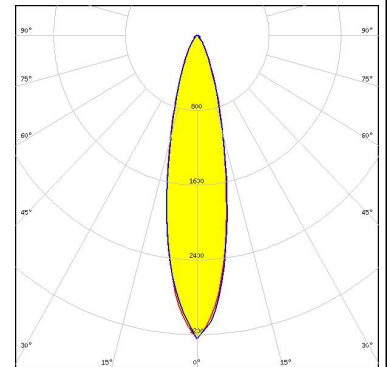

### PHOTOMETRIC DATA (SIMULATED):




LED V22 Gen7  
FWHM 32.0°  
Efficiency 85 %  
Peak intensity 1.726 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2030

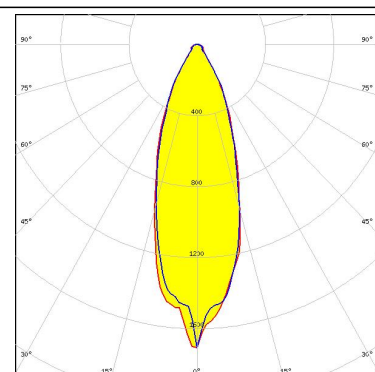


### CITIZEN

LED CLL03x/CLU03x  
FWHM 23.0°  
Efficiency 81 %  
Peak intensity 3.840 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
BJB: 47.319.2021

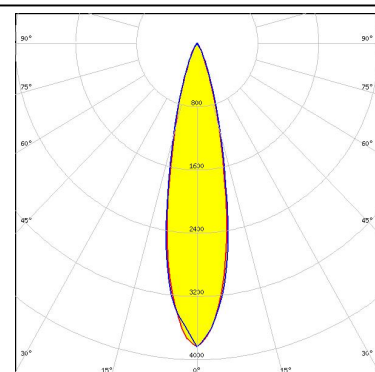

LED LUXEON CoB 1204/1205  
FWHM 23.0°  
Efficiency 72 %  
Peak intensity 3.530 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
TE: 2213130-2

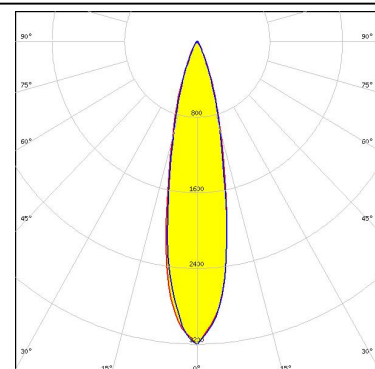

### SHARP

LED Mega Zenigata (GW6DME)  
FWHM 29.0°  
Efficiency 77 %  
Peak intensity 2.400 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 432 Typ Z1

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)