

RGBX


Ø30.4 mm TIR-lenses for RGBW colour mixing applications and up to 5050 size RGB LED packages

RGBX-family designed to be used with multi-chip RGB-LEDs and provide colour-mixing to achieve full colour lighting with good colour uniformity. Narrow, medium and oval beam spreads available as well as easy snap-on sublenses to change beam from spot to medium or spot to oval.



PRODUCTS:


CP10766_RGBX-M

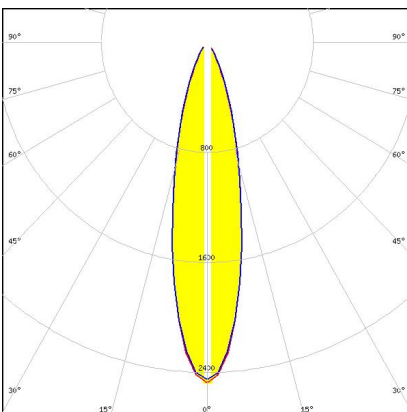

Dimensions: 30.0 mm x 30.0 mm
Height: 28.00 mm

~30° medium beam optimized for Osram Ostar-SMT RGB. Assembly with colour mixing sublens and holder.


CP10767_RGBX-O

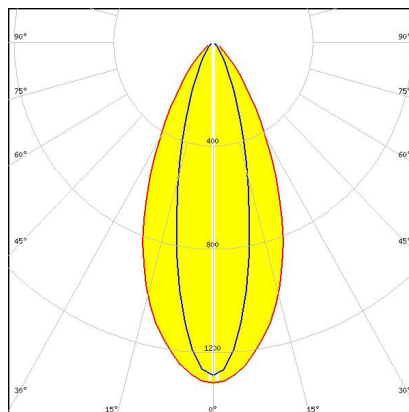

Dimensions: 30.0 mm x 30.0 mm
Height: 28.00 mm

~50°+ 25° oval beam optimized for Osram Ostar-SMT RGB. Assembly with colour mixing sublens and holder.

CP10944_RGBX-M

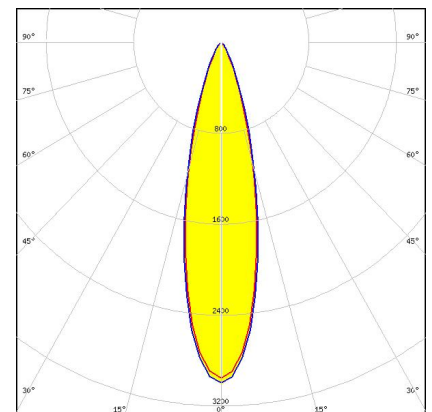


Dimensions: 30.4 mm x 30.4 mm
Height: 28.80 mm

~30° medium beam optimized for CREE MC-E RGB. Assembly with colour mixing sublens and holder.

PRODUCTS:


CP10945_RGBX-O

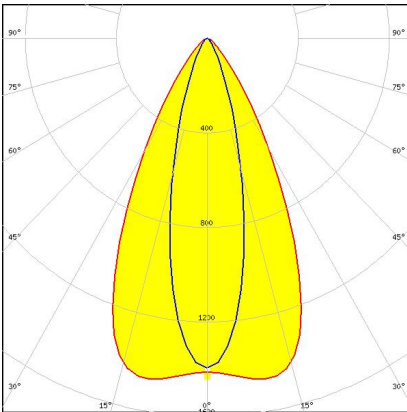

Dimensions: 30.4 mm x 30.4 mm
Height: 28.80 mm

~50°+ 25° oval beam optimized for CREE MC-E RGB. Assembly with colour mixing sublens and holder.


CP10960_RGBX-SS

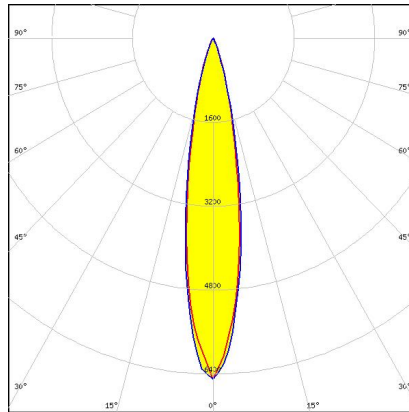

Dimensions: 30.0 mm x 30.0 mm
Height: 28.00 mm

~20° smooth spot beam optimized for Osram Ostar-SMT RGB. Assembly with holder.


CP10961_RGBX-SS

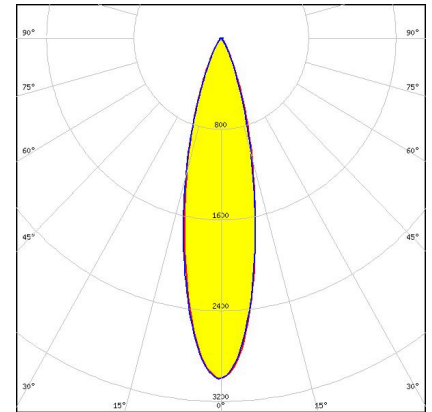

Dimensions: 30.4 mm x 30.4 mm
Height: 28.80 mm

~20° smooth spot beam optimized for CREE MC-E. Assembly with colour mixing sublens and holder.


CP13682_RGBX2-S

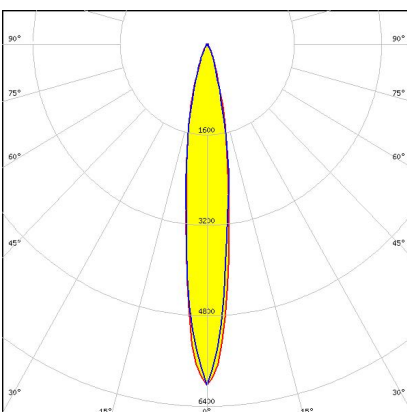

Dimensions: 30.4 mm x 30.4 mm
Height: 28.20 mm

~20° spot beam optimized for CREE XM-L RGB. Assembly with holder.


CP13938_RGBX2-M

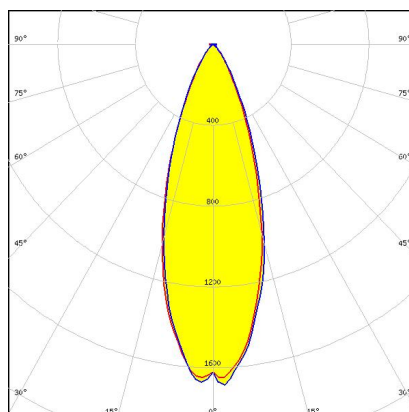

Dimensions: 30.4 mm x 30.4 mm
Height: 28.20 mm

~30° medium beam optimized for CREE XM-L RGB. Assembly with colour mixing sublens and holder.

CP13939_RGBX2-O

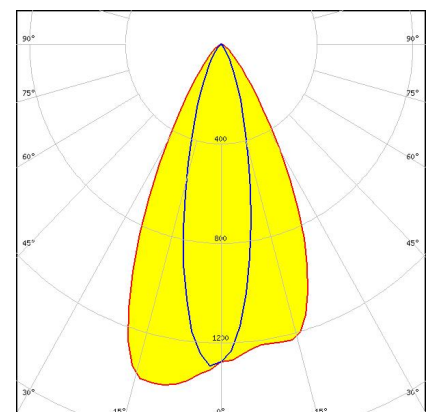

Dimensions: 30.4 mm x 30.4 mm
Height: 28.20 mm

~50°+ 24° oval beam optimized for CREE XM-L RGB. Assembly with colour mixing sublens and holder.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)