

## STRADA-2X2-ME

Beam with excellent longitudinal luminance uniformity fulfilling EN13201 M-class requirements where road width is equal to or less the pole height

### TECHNICAL SPECIFICATIONS:

Dimensions	50.0 x 50.0 mm
Height	7.1 mm
Fastening	glue, pin, screw
ROHS compliant	yes ⓘ




### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADA-2X2-ME	Multi-lens	PMMA	clear	

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C13299_STRADA-2X2-ME	800	160	160	7.9
» Box size: 480 x 280 x 300 mm				


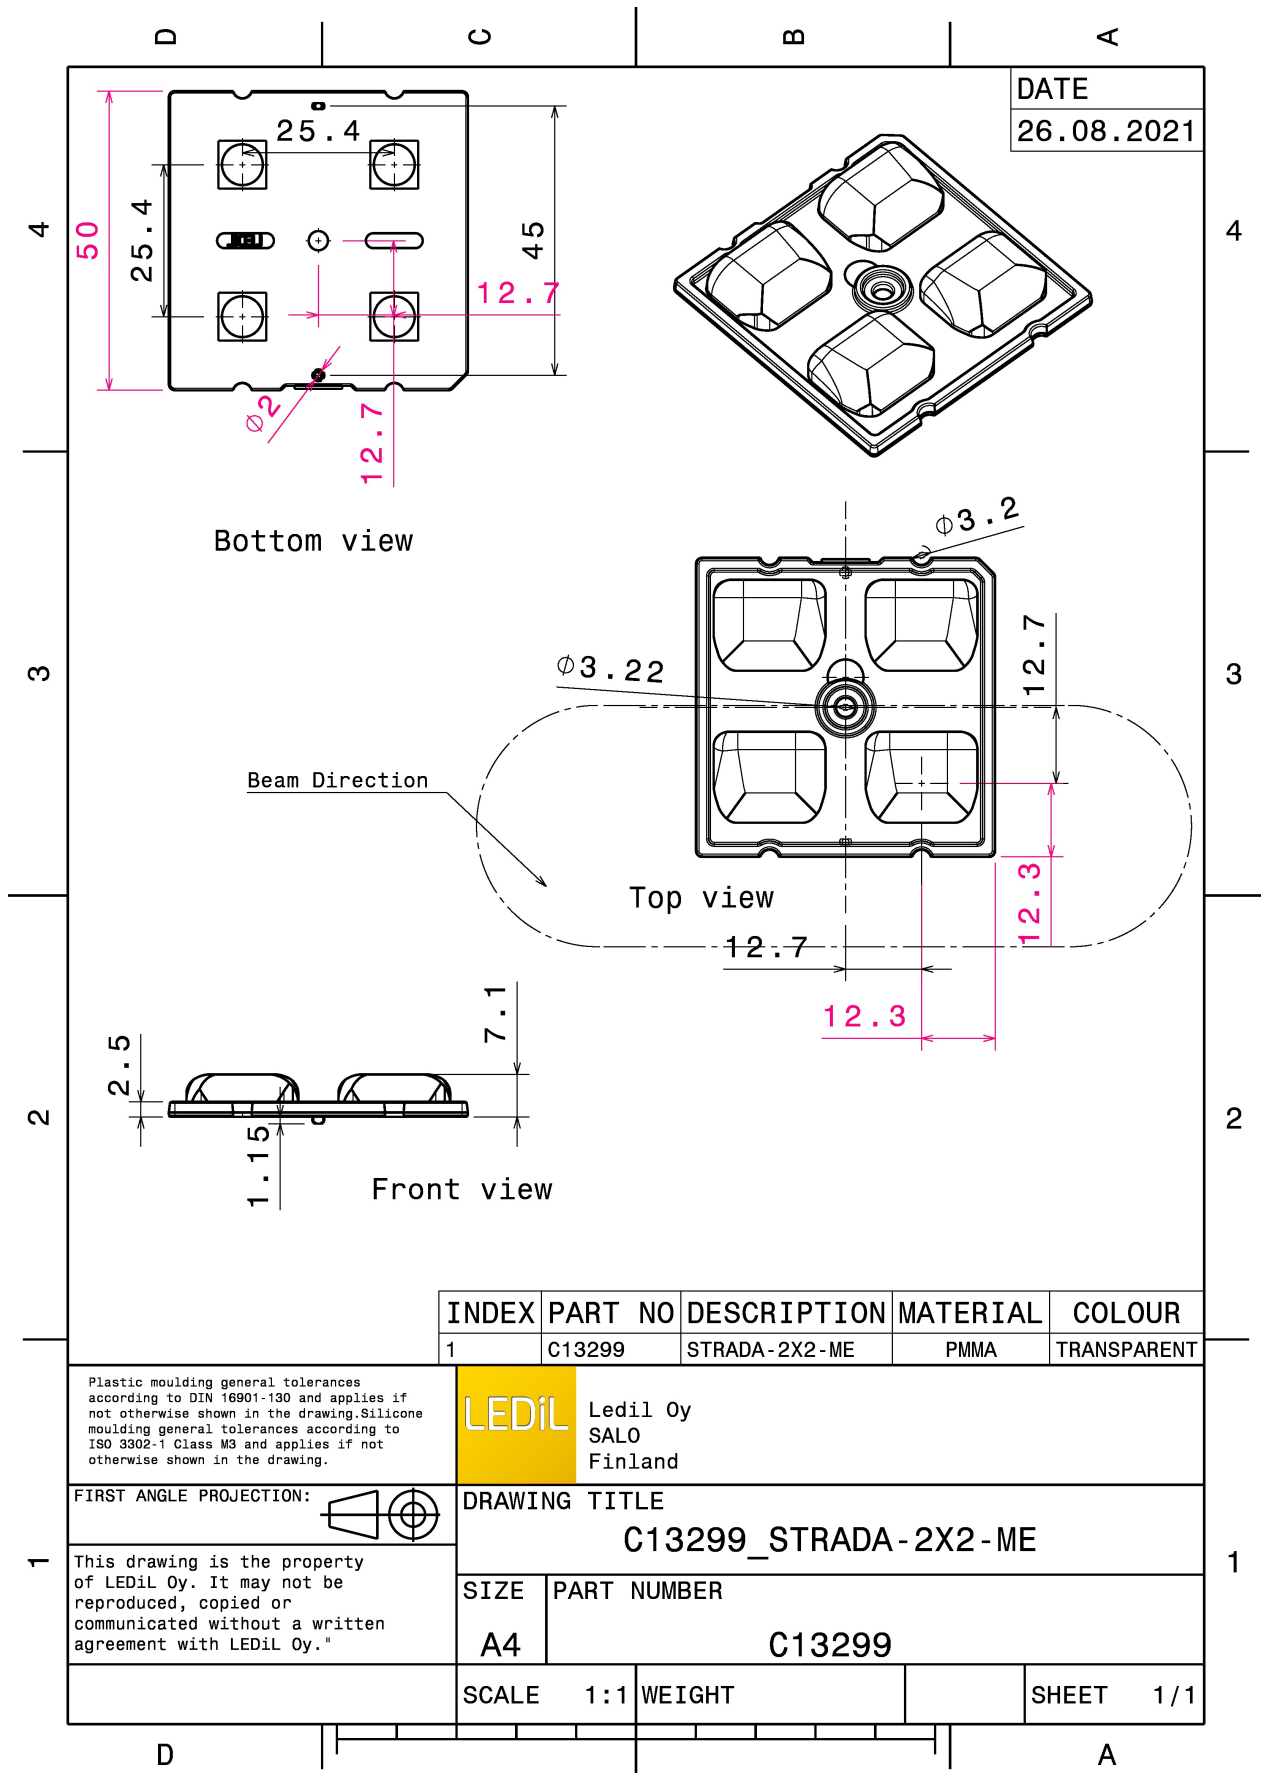


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


#### PHOTOMETRIC DATA (MEASURED):




LED Bridgelux SMD 5050  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

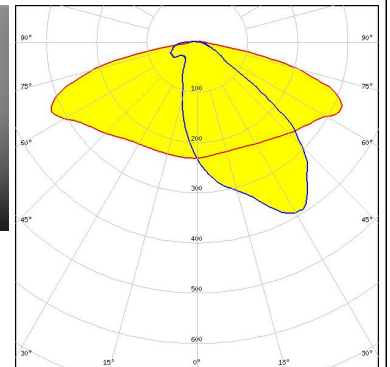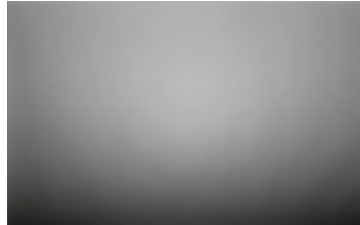


LED QUICK FLUX XTP 2x4 xxx LS G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

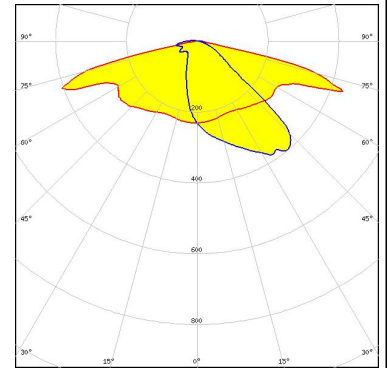

LED QUICK FLUX XTP 2x6 xxx LS G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

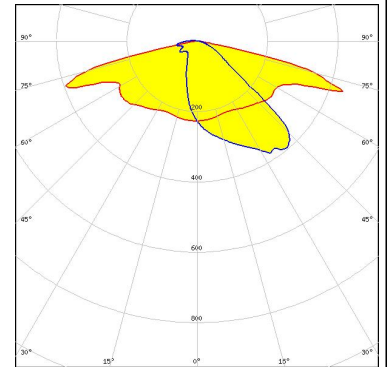


LED QUICK FLUX XTP 2x8 xxx LS G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

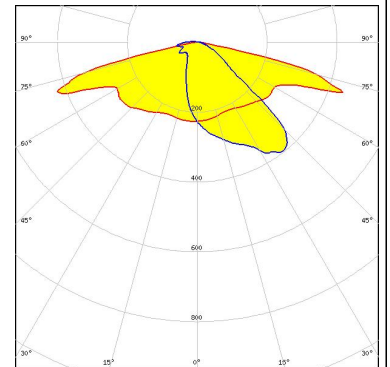

#### PHOTOMETRIC DATA (MEASURED):


##### CREE LED

LED XB-D White  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

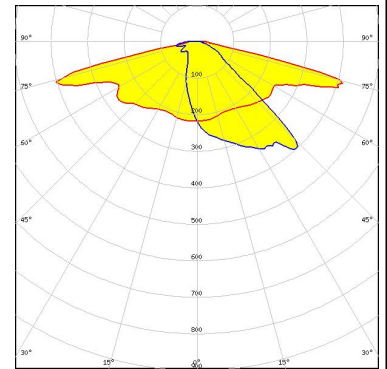


##### CREE LED

LED XD16  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

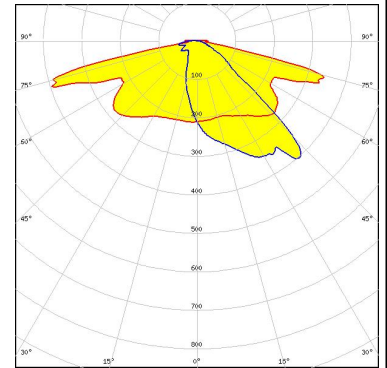


##### CREE LED

LED XD16  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 4  
Light colour White  
Required components:

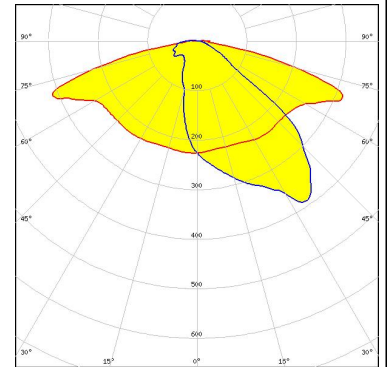

##### CREE LED

LED XM-L  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

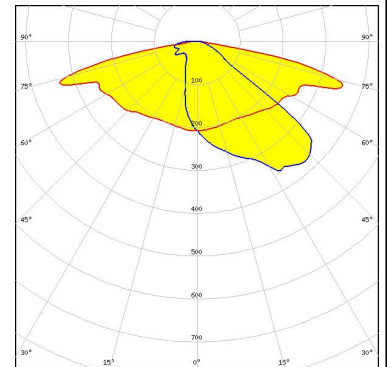




#### PHOTOMETRIC DATA (MEASURED):



##### CREE LED

LED XM-L2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

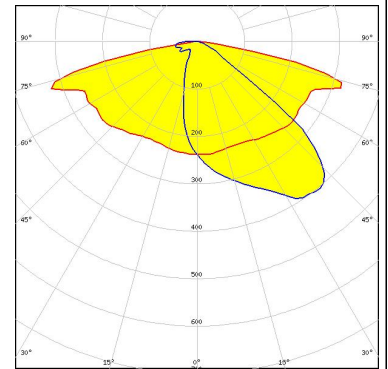


##### CREE LED

LED XM-L3  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

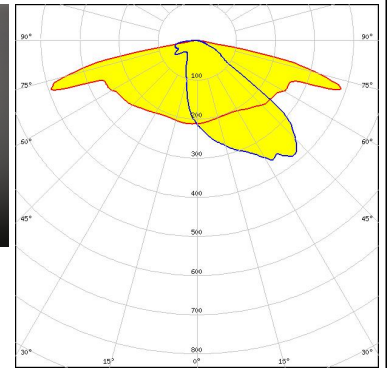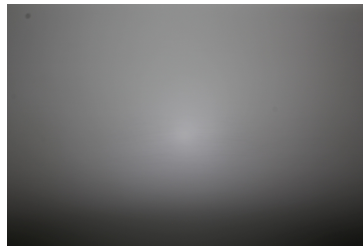


##### CREE LED

LED XP-E2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

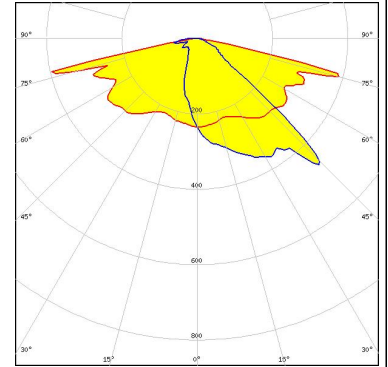

##### CREE LED


LED XP-G  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

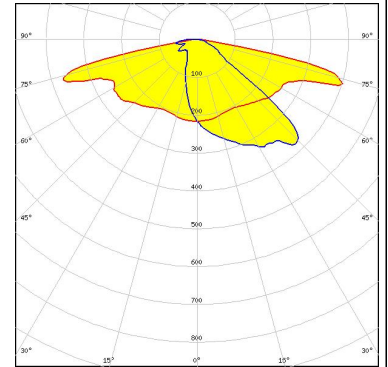

#### PHOTOMETRIC DATA (MEASURED):


##### CREE LED

LED XP-G2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

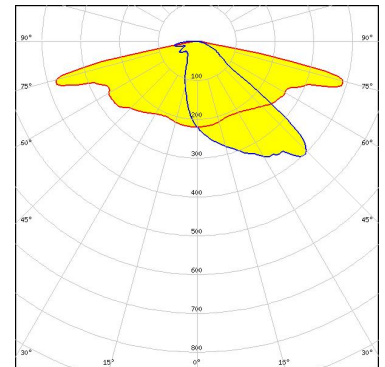


##### CREE LED

LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

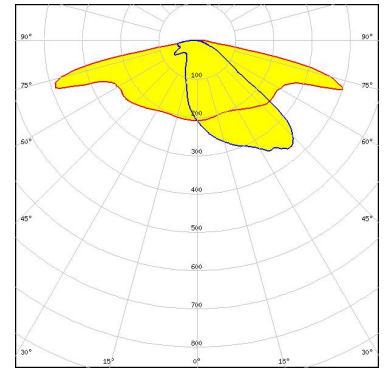


##### CREE LED

LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

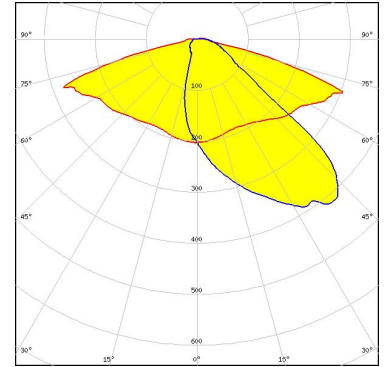

##### CREE LED


LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 76 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

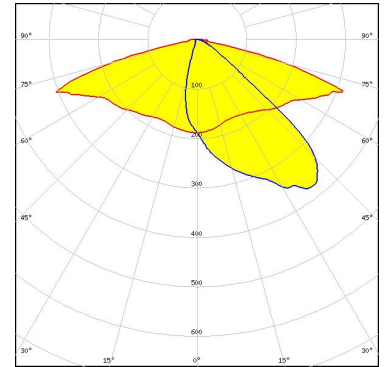

#### PHOTOMETRIC DATA (MEASURED):


##### CREE LED

LED XP-L HD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

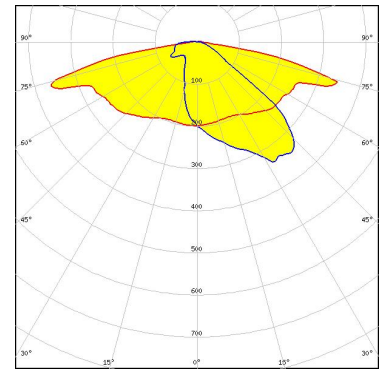


##### CREE LED

LED XP-L HI  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

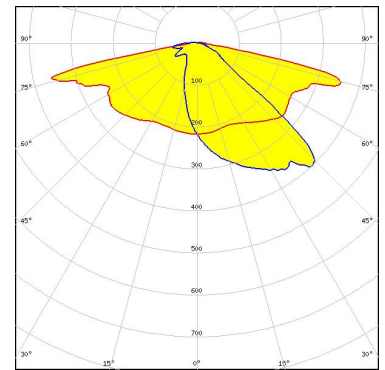


##### CREE LED

LED XP-L2  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

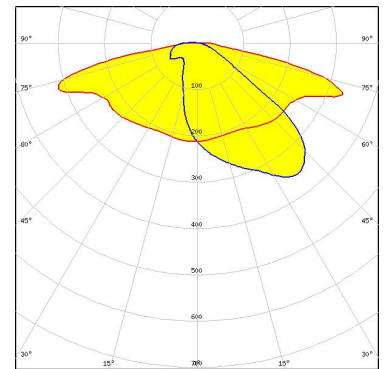

##### CREE LED


LED XT-E  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

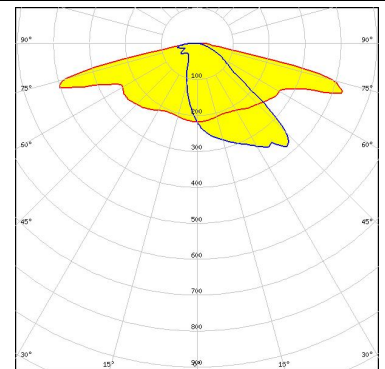


#### PHOTOMETRIC DATA (MEASURED):




LED EHP-2x8-3535  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

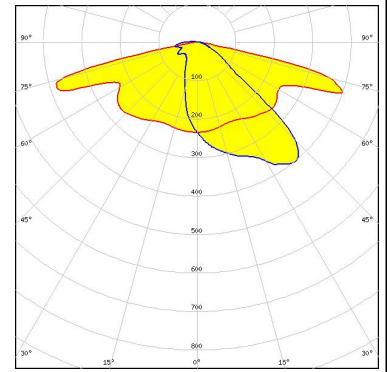


LED EHP-2x8-5050  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

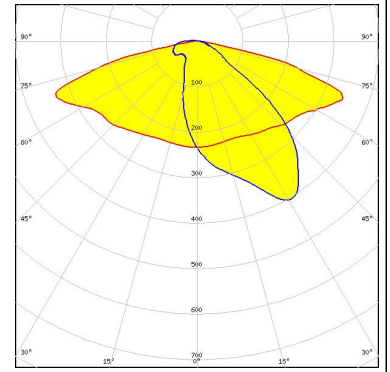

LED LUXEON 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

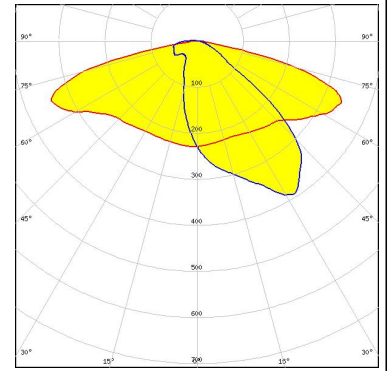


LED LUXEON MZ  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

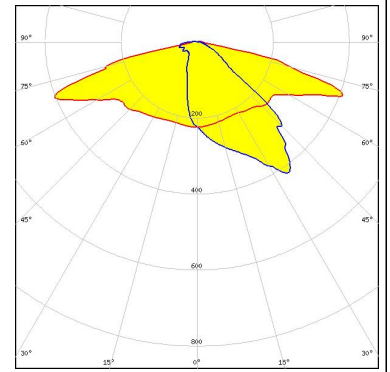

#### PHOTOMETRIC DATA (MEASURED):


##### LUMILEDS

LED LUXEON Q  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

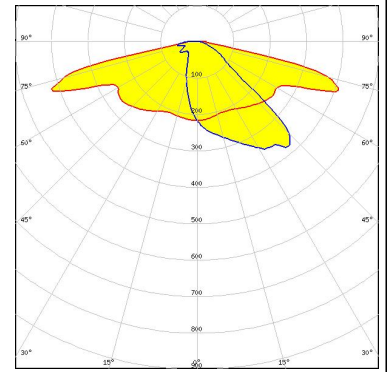


##### LUMILEDS

LED LUXEON R  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

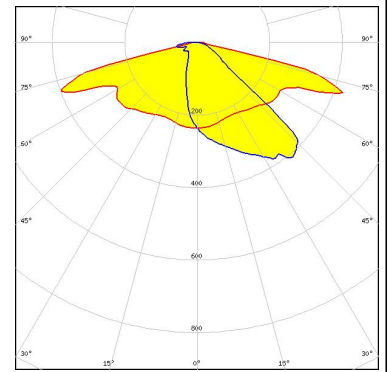


##### LUMILEDS

LED LUXEON Rebel ES  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

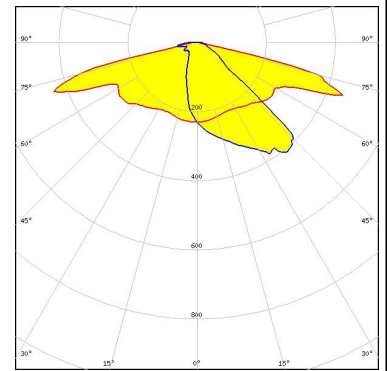

##### LUMILEDS


LED LUXEON T  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

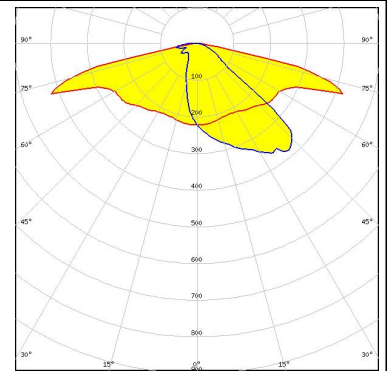

#### PHOTOMETRIC DATA (MEASURED):



##### LUMILEDS

LED LUXEON TX  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

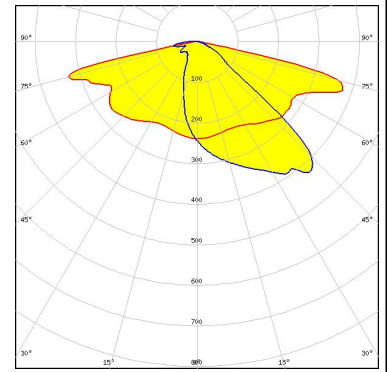


##### LUMILEDS

LED LUXEON V  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

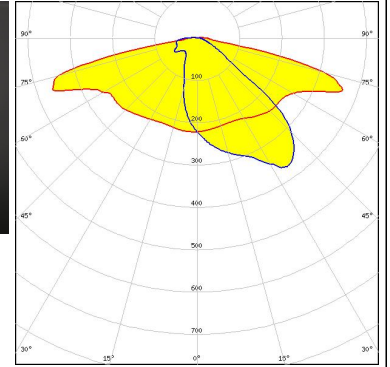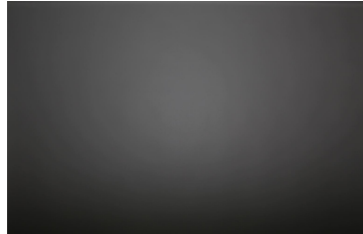


##### LUMILEDS

LED LUXEON V2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

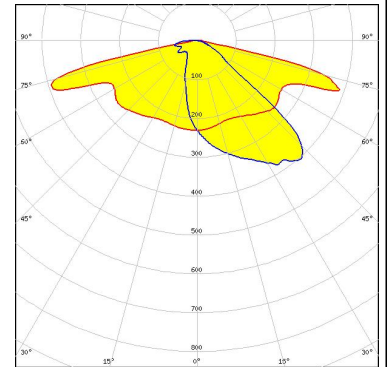

##### LUMILEDS

LED LUXEON Z ES  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

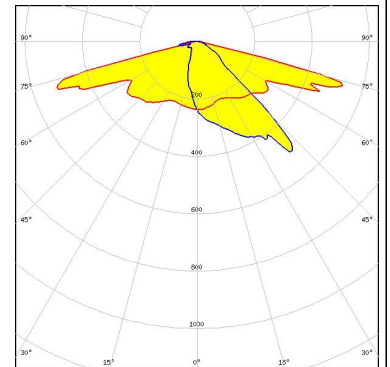




#### PHOTOMETRIC DATA (MEASURED):


##### MST Your solutions

LED RecLED 122x50mm 1900lm 730 2x4 Opt G1  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

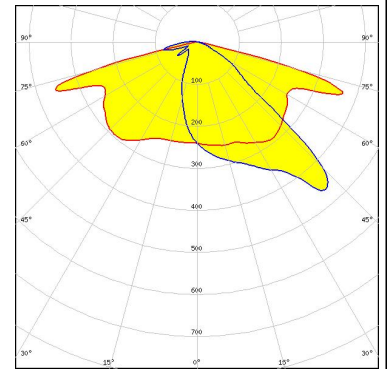


##### NICHIA

LED NS9x383  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

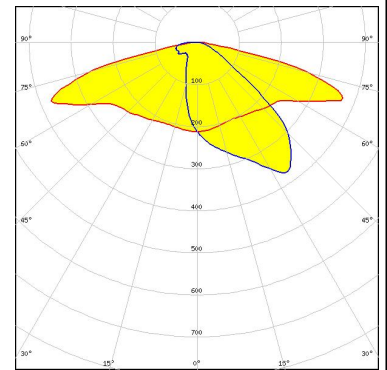


##### NICHIA

LED NVSW219D  
 FWHM / FWTM Asymmetric  
 Efficiency 86 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

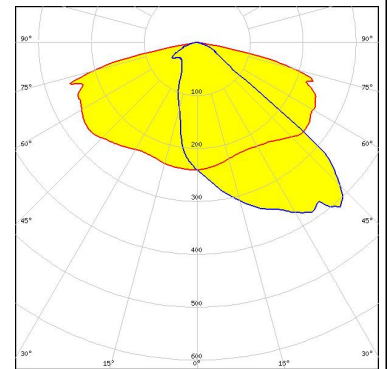

##### NICHIA


LED NVSW219D  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

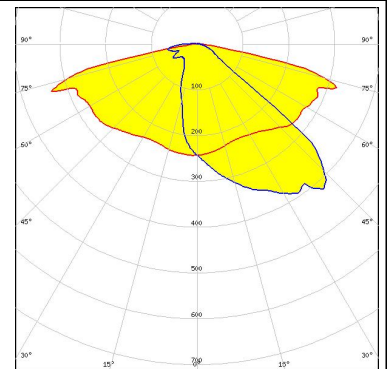


#### PHOTOMETRIC DATA (MEASURED):




LED NVSW219F  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

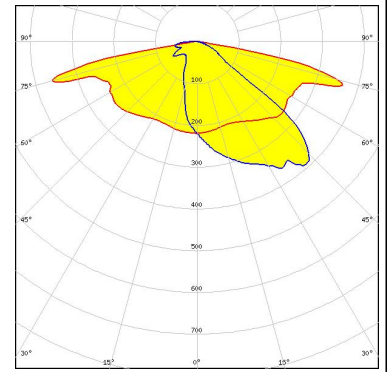


LED NVSW219F  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

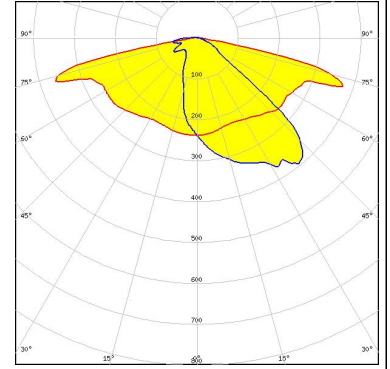

LED NVSW319B  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

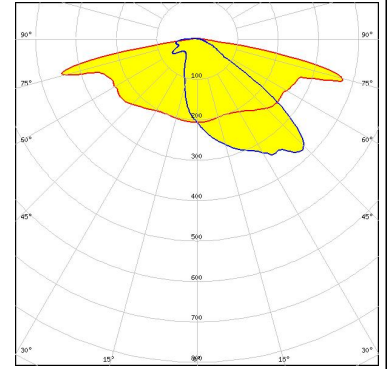


LED NVSW3x9A  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

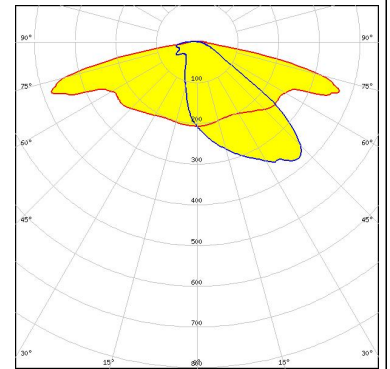


#### PHOTOMETRIC DATA (MEASURED):




LED NVSxx19B/NVSxx19C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

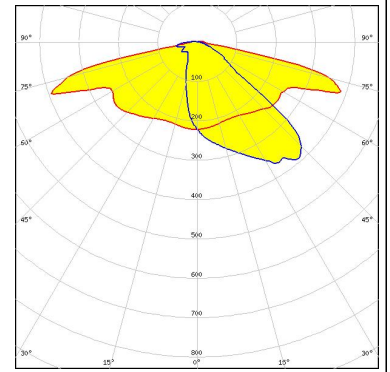


LED NWSx229A  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

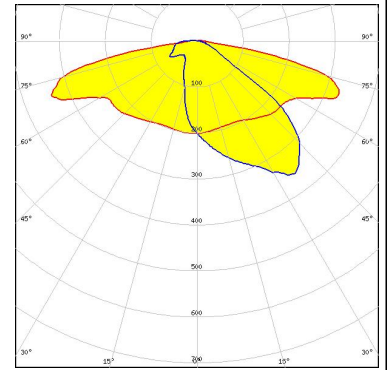

LED PL-BRICK HP 3800 2x8 SSG  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

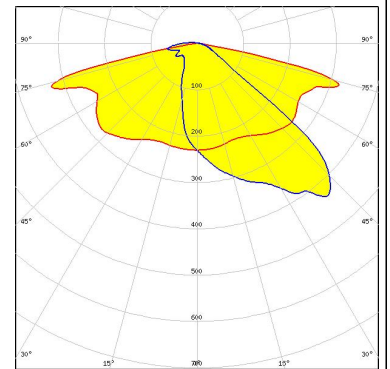

LED PrevaLED Brick HP 2x8  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

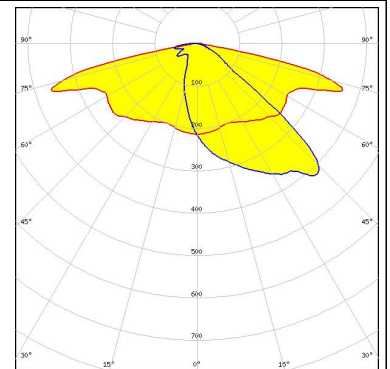


#### PHOTOMETRIC DATA (MEASURED):

##### OSRAM

Opto Semiconductors


LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

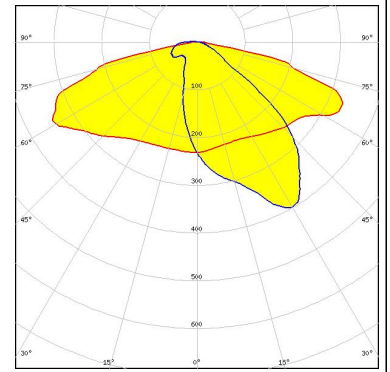

##### OSRAM

Opto Semiconductors


LED OSLOM Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

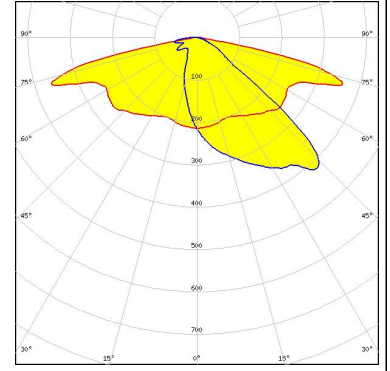

##### OSRAM


Opto Semiconductors

LED OSLOM Square PC  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

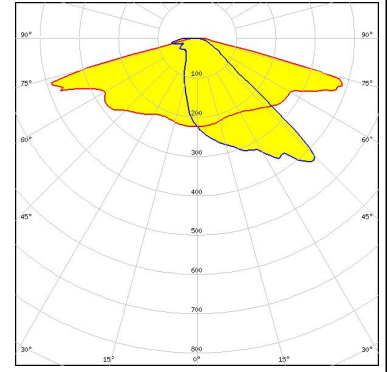

##### PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

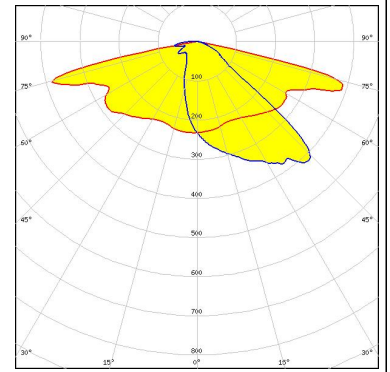

#### PHOTOMETRIC DATA (MEASURED):


#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

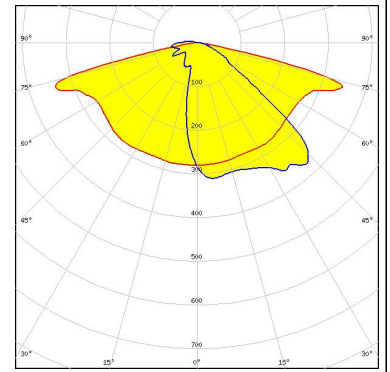


#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

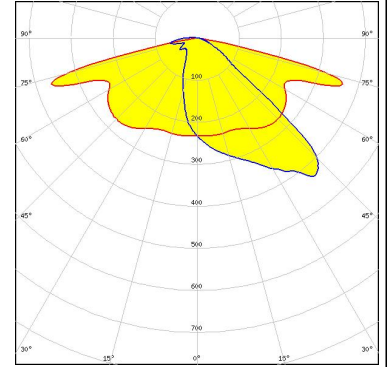


#### SAMSUNG

LED HiLOM RC12 Z (LH181B)  
 FWHM / FWTM Asymmetric  
 Efficiency 99 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

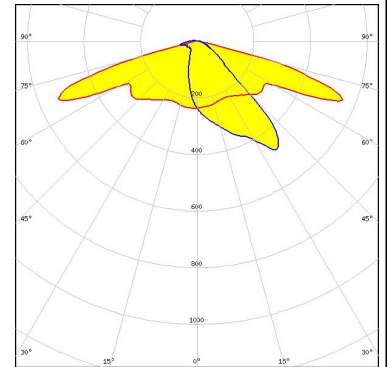

#### SAMSUNG


LED HiLOM RH12 Z (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

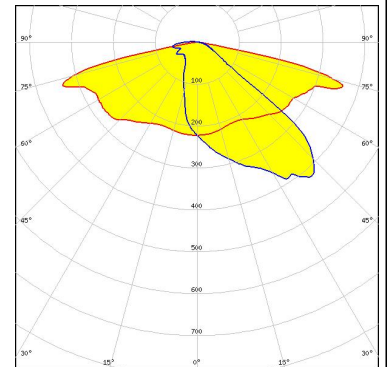

#### PHOTOMETRIC DATA (MEASURED):


#### SAMSUNG

LED HiLOM RH16 (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

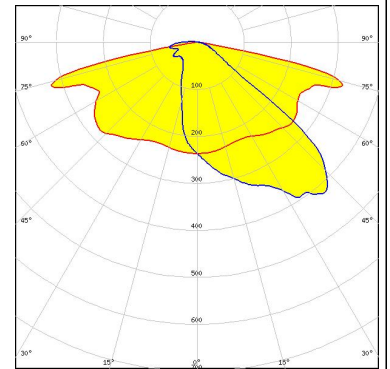


#### SAMSUNG

LED HiLOM RM12 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

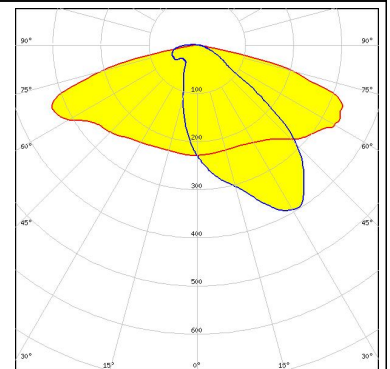


#### SAMSUNG

LED HiLOM RM16 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 99 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

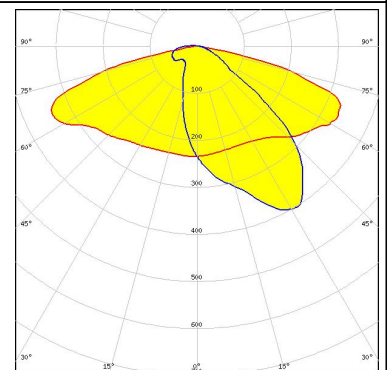

#### SAMSUNG

LED HiLOM RM8 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

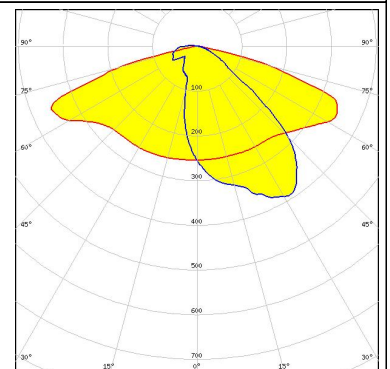




#### PHOTOMETRIC DATA (MEASURED):


#### SAMSUNG

LED LH351B  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

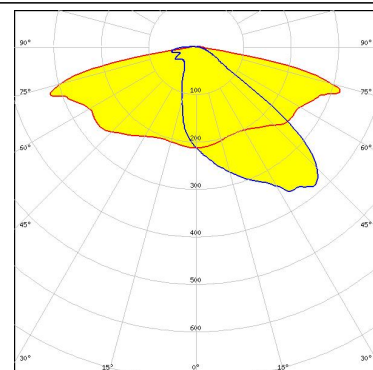


#### SAMSUNG

LED LH351C  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

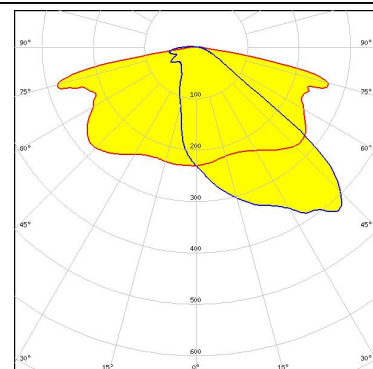


#### SAMSUNG

LED LH351D  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

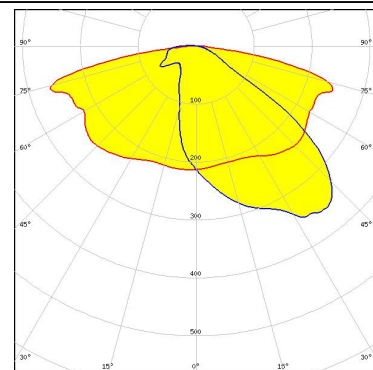

#### SAMSUNG

LED LH508A  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

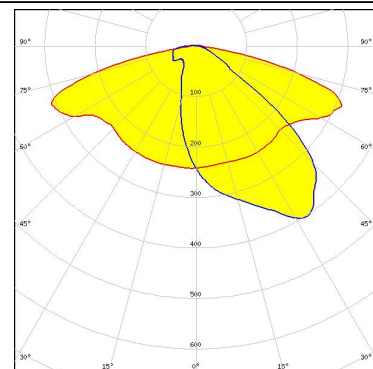

#### PHOTOMETRIC DATA (MEASURED):

<p><b>SEITEC</b> Elektronik GmbH</p> <p>LED LED-Pa-L15c2W11c2-xxx-C050-01</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 98 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Acrich MJT 4040</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M1/Z5M2</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	

#### PHOTOMETRIC DATA (MEASURED):

<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M3</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M4</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 97 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5P</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	


#### PHOTOMETRIC DATA (MEASURED):

<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22P</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>TOSHIBA</b> Leading Innovation &gt;&gt;&gt;</p> <p>LED TL1L3</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.7 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>TOSHIBA</b> Leading Innovation &gt;&gt;&gt;</p> <p>LED TL1L4</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 91 %</p> <p>Peak intensity 0.9 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>TRIDONIC</b></p> <p>LED RLE 2x4 2000lm HP EXC2 OTD</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 1.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	

### PHOTOMETRIC DATA (MEASURED):


#### TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

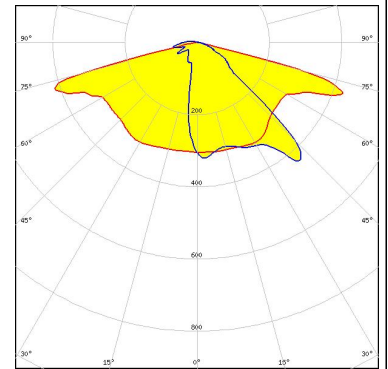


#### TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

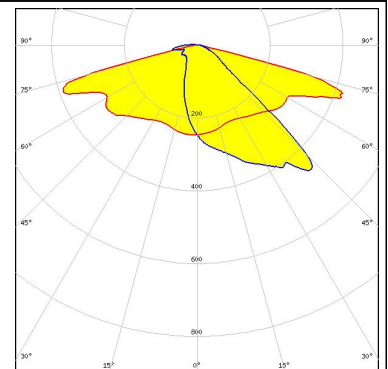


#### TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

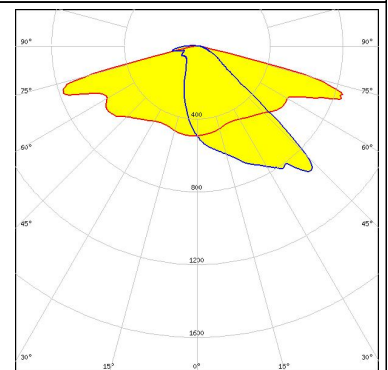

#### TRIDONIC


LED RLE G1 49x223mm 4000lm xxx EXC OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

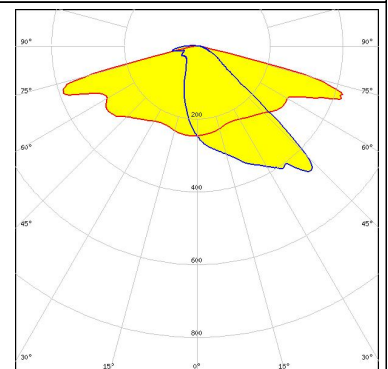

### PHOTOMETRIC DATA (MEASURED):

#### TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

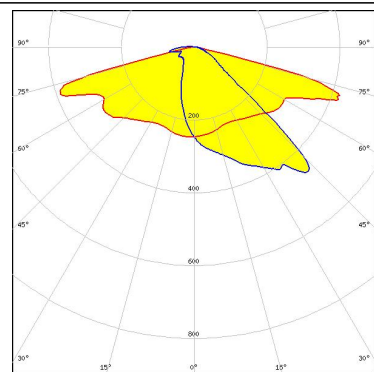




#### PHOTOMETRIC DATA (SIMULATED):




LED J Series 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

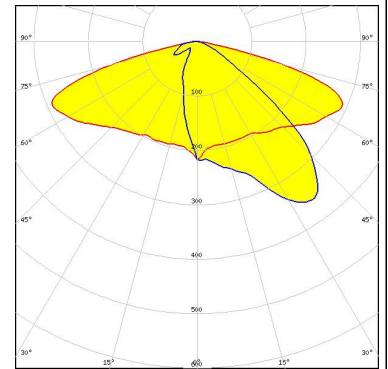


LED J Series 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

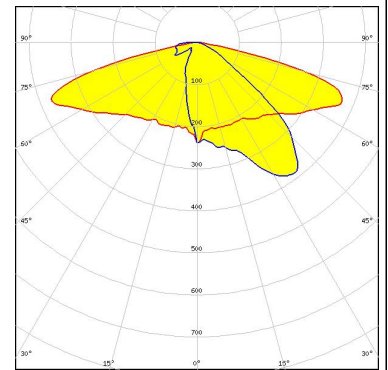

LED XB-H  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

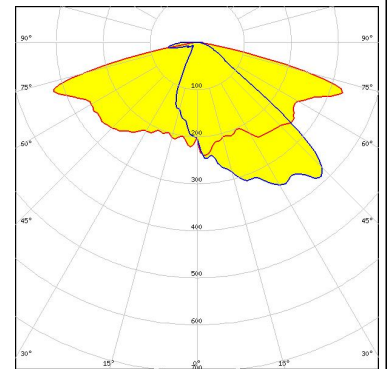

LED XHP35 HD  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

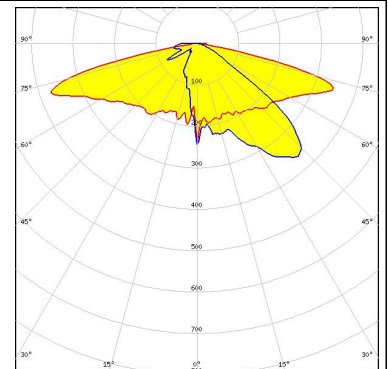

#### PHOTOMETRIC DATA (SIMULATED):




LED XHP35 HI  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
LEDs/each optic 1  
Light colour White  
Required components:



LED XP-G2  
FWHM / FWTM Asymmetric  
Efficiency 86 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

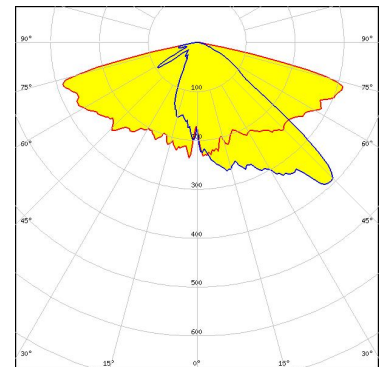


LED XP-G2 HE  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:



LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 78 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

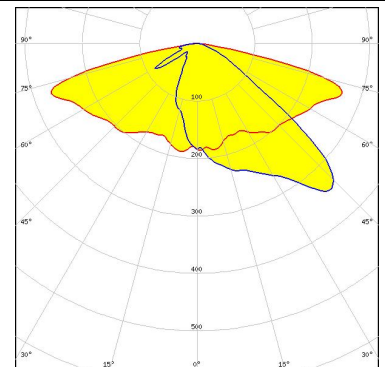


#### PHOTOMETRIC DATA (SIMULATED):




LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 75 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

Protective plate, glass

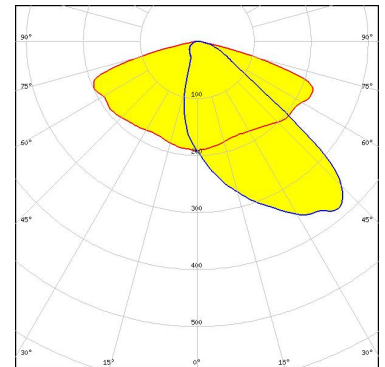


LED XP-L2  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

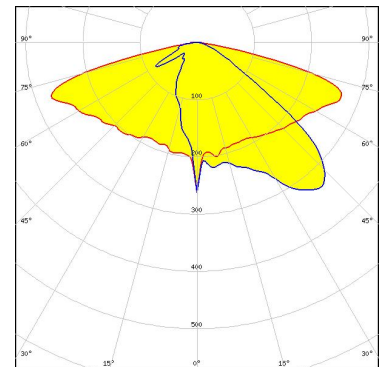


LED XQ-E HD  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

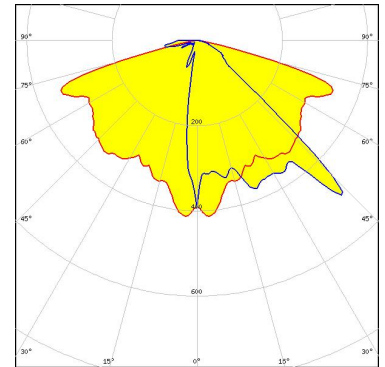

LED XT-E  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

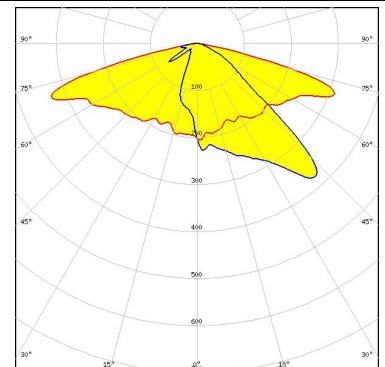


#### PHOTOMETRIC DATA (SIMULATED):

##### LUMILEDS


LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

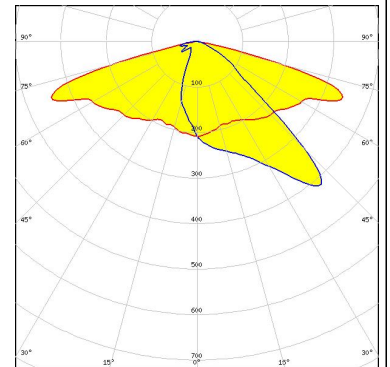

##### LUMILEDS


LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

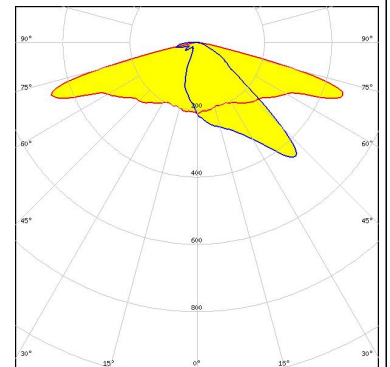

##### LUMILEDS

LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 72 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

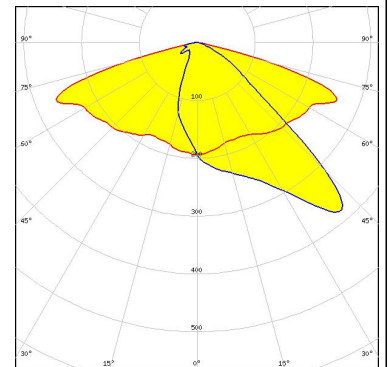

##### LUMILEDS

LED LUXEON 3030 2D (Square LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

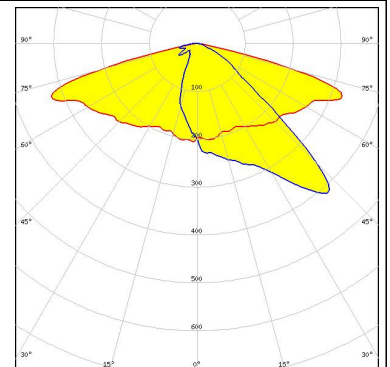

#### PHOTOMETRIC DATA (SIMULATED):

##### LUMILEDS


LED LUXEON 3030 2D (Square LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

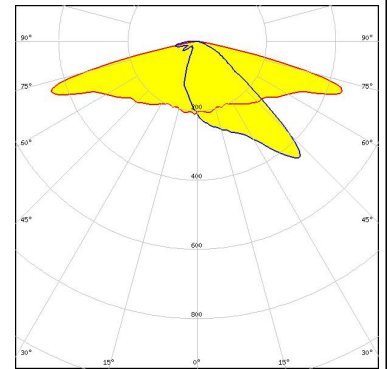

##### LUMILEDS


LED LUXEON 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

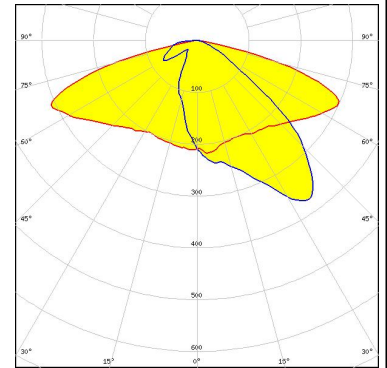

##### LUMILEDS


LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

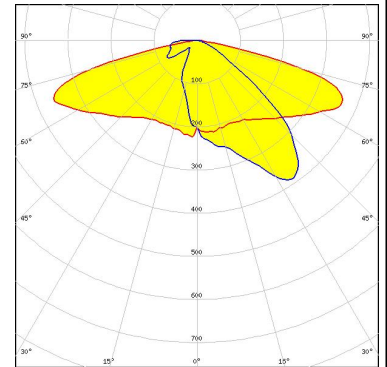

##### LUMILEDS

LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

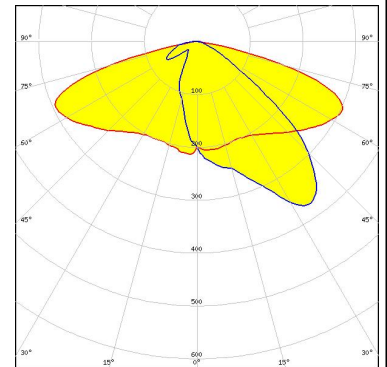


#### PHOTOMETRIC DATA (SIMULATED):



LED LUXEON H50-2  
 FWHM / FWTM Asymmetric  
 Efficiency %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

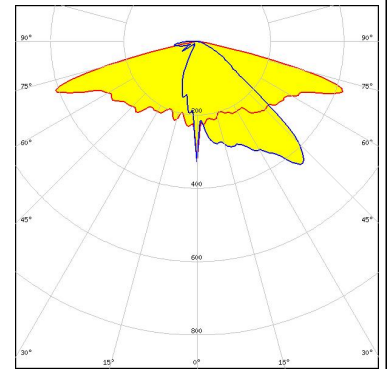


LED LUXEON HL2X-P  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

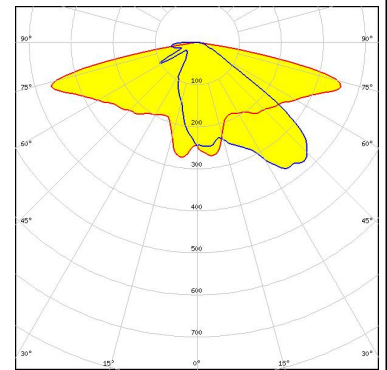


LED LUXEON HL2X-P  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

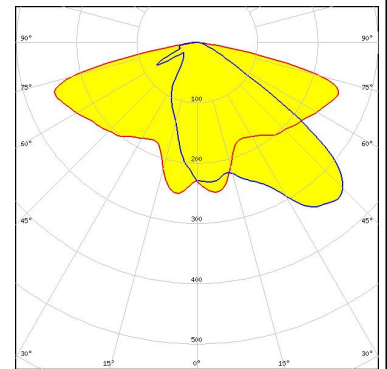

LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

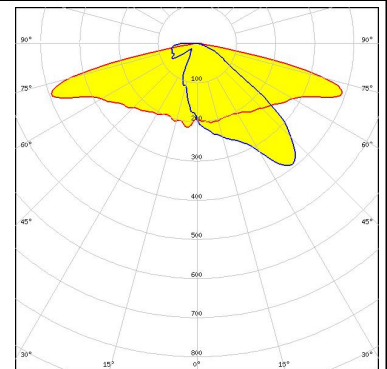




#### PHOTOMETRIC DATA (SIMULATED):




LED NVSW219F  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

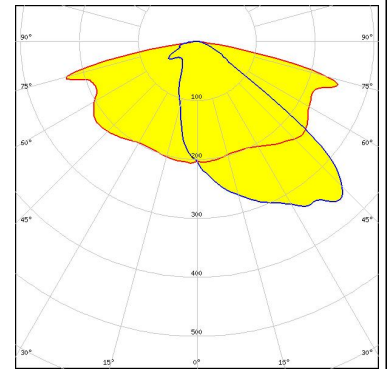


LED NVSW519A  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

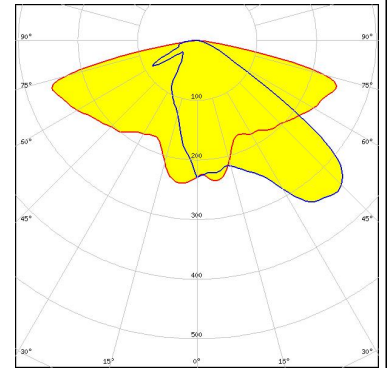


LED NVSW519A  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

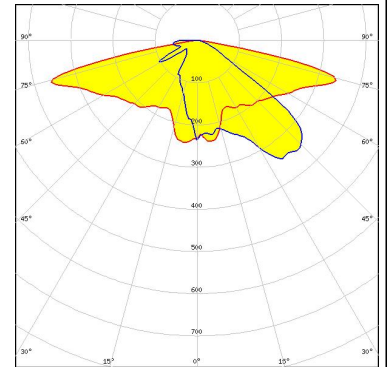

LED NVSxE21A  
FWHM / FWTM Asymmetric  
Efficiency 83 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

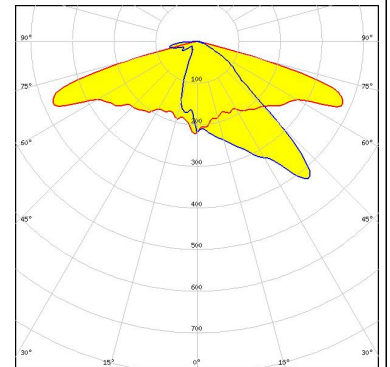


#### PHOTOMETRIC DATA (SIMULATED):




LED NVSxE21A  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass


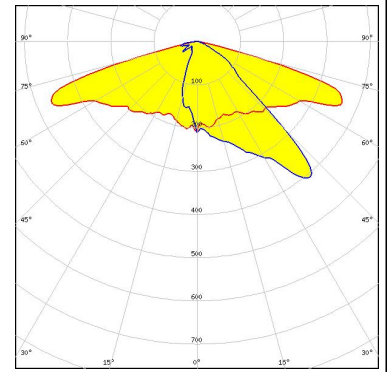


LED NVSxx19B/NVSxx19C  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

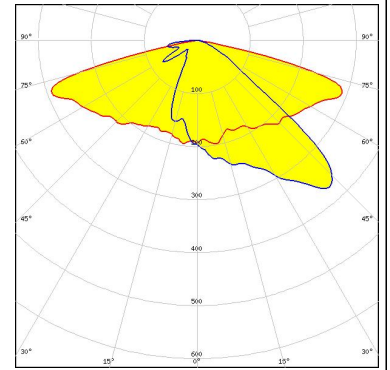


LED NVSxx19B/NVSxx19C  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour Amber  
Required components:

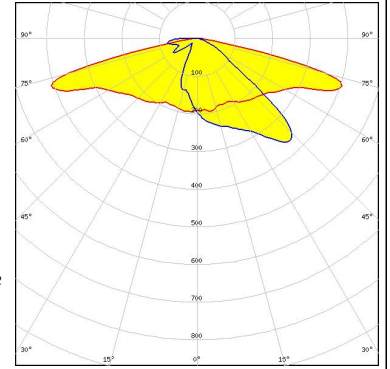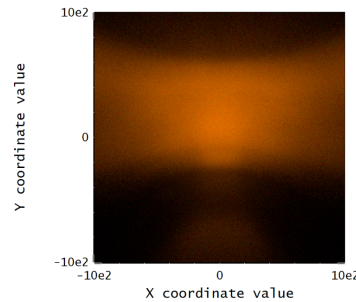

LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 83 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

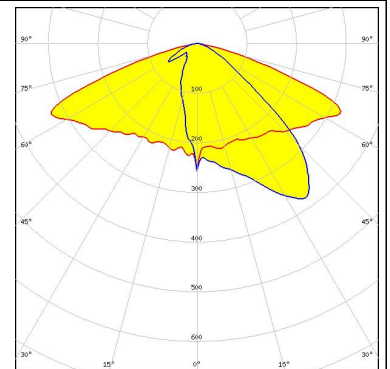


#### PHOTOMETRIC DATA (SIMULATED):

##### OSRAM

Opto Semiconductors

LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 78 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

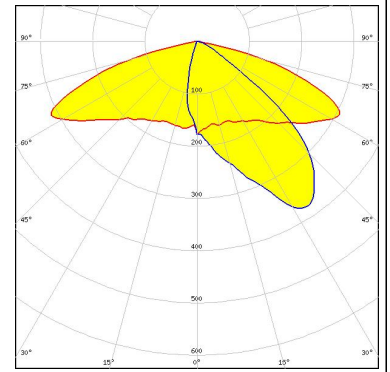


##### OSRAM

Opto Semiconductors

LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

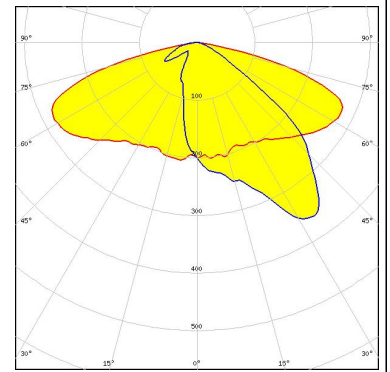

##### OSRAM

Opto Semiconductors


LED OSCONIQ P 3737 (2W version)  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

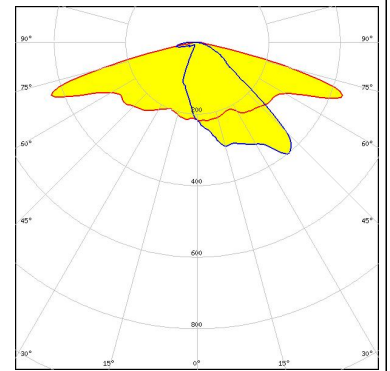

##### OSRAM

Opto Semiconductors

LED OSCONIQ P 3737 (3W version)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

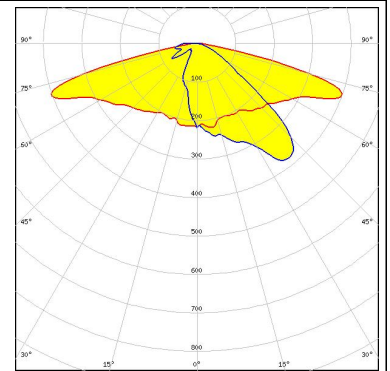


#### PHOTOMETRIC DATA (SIMULATED):

##### OSRAM

Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

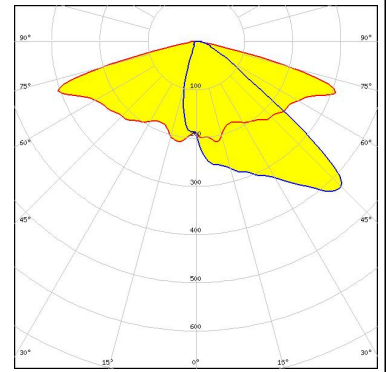

##### OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 68 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

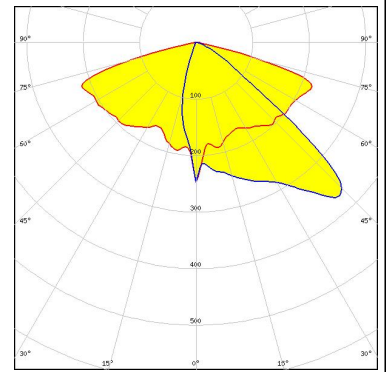


Protective plate, glass

##### OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 73 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

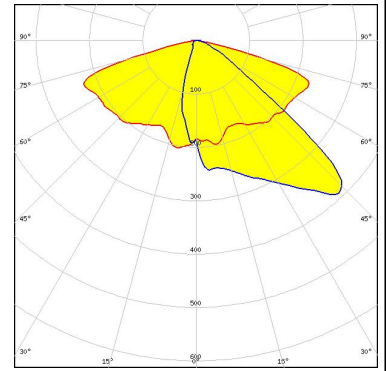


Protective plate, glass

##### OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

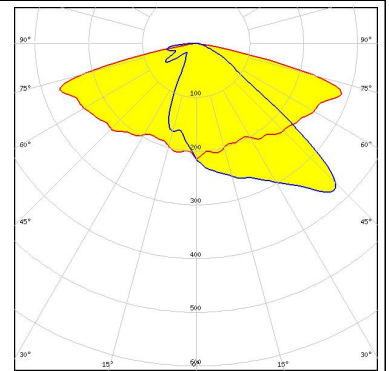


Protective plate, glass

#### PHOTOMETRIC DATA (SIMULATED):

##### OSRAM


Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

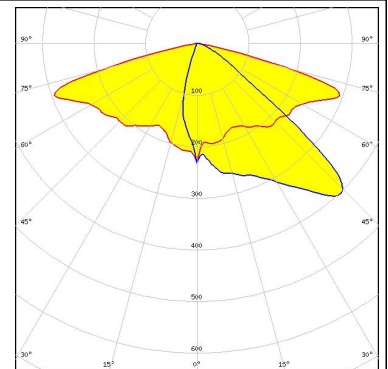

##### PHILIPS


LED Fortimo FastFlex LED 2x2 DA G5  
 FWHM / FWTM Asymmetric  
 Efficiency 71 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

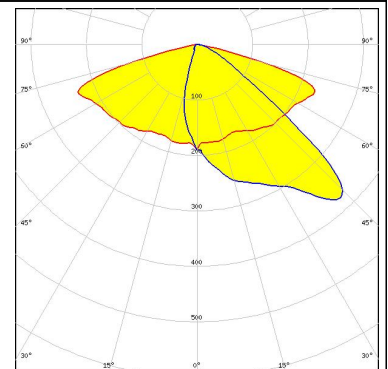

Protective plate, glass


##### PHILIPS

LED Fortimo FastFlex LED 2x2 DA G5  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

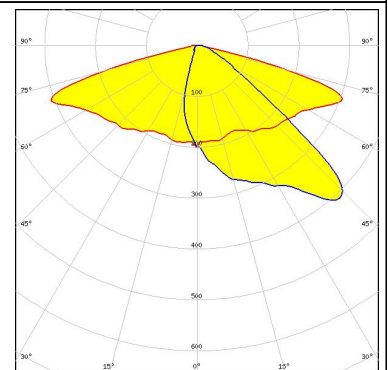

##### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+  
 FWHM / FWTM Asymmetric  
 Efficiency 66 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

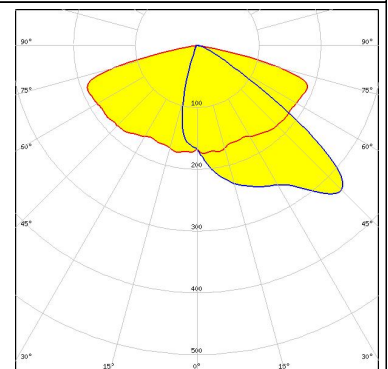

Protective plate, glass

#### PHOTOMETRIC DATA (SIMULATED):

#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric

Efficiency 75 %


Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C17677\_STRADA-2X2-SHD-BLK

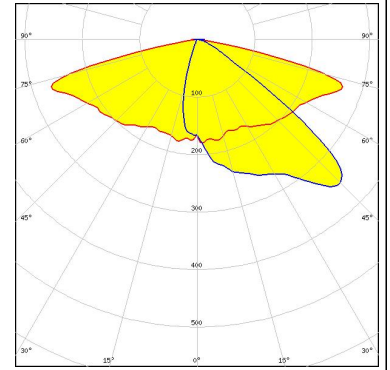

#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric

Efficiency 82 %


Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass

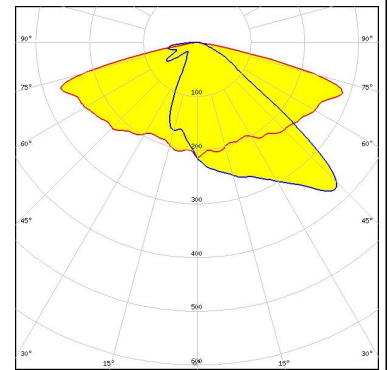

#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric

Efficiency 83 %


Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass

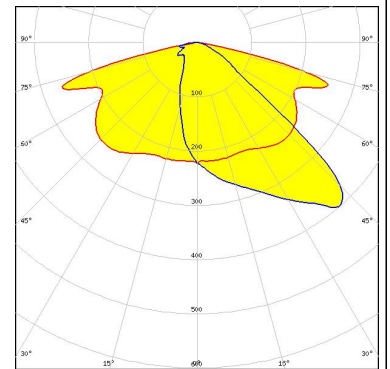

#### PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4


FWHM / FWTM Asymmetric

Efficiency 93 %

LEDs/each optic 1

Light colour White

Required components:

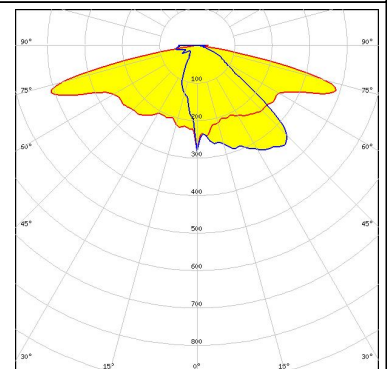




#### PHOTOMETRIC DATA (SIMULATED):

#### SAMSUNG


LED HiLOM RH12 Z (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

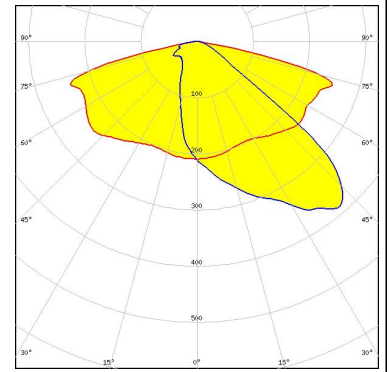

#### SAMSUNG


LED LH181B  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 4  
 Light colour White  
 Required components:

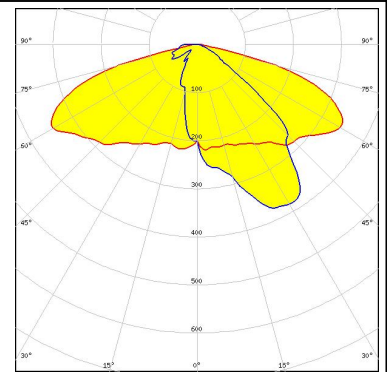

#### SAMSUNG

LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

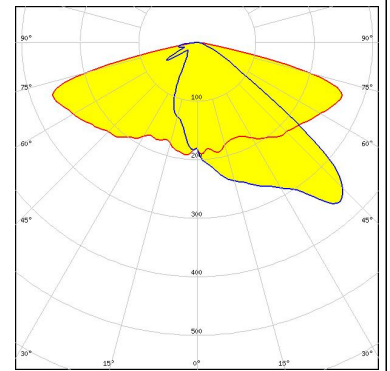





#### SAMSUNG

LED LH508A  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

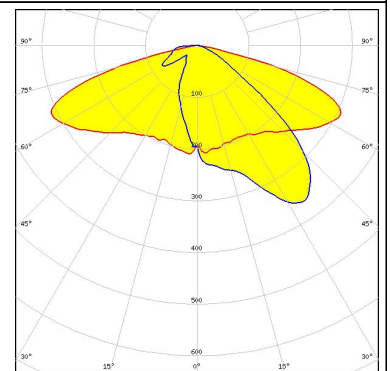

#### PHOTOMETRIC DATA (SIMULATED):
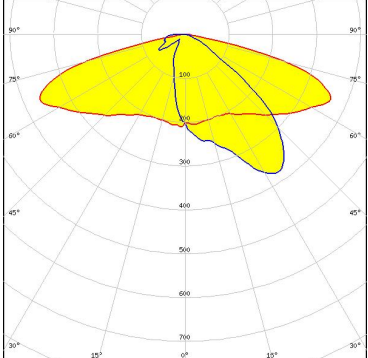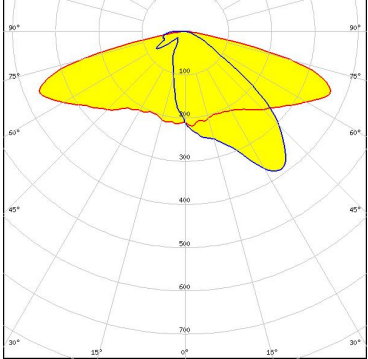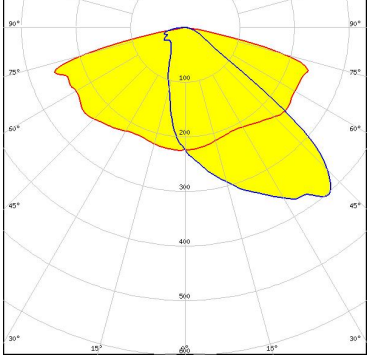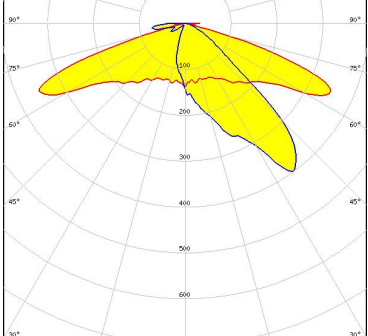
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED MJT 5050</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED SEOUL DC 5050 6V</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 95 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M4</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 82 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p> <p>Protective plate, glass</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 76 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p> <p>C17677_STRADA-2X2-SHD-BLK</p>	

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil:

[C13299\\_STRADA-2X2-ME](#)