







89CNQ135/89CNQ150 SCHOTTKY RECTIFIER

Applications

- Switching power supply
- Converters
- Free-Wheeling diodes
- Reverse battery protection

Features

- 175°C T_J operation
- Ultra low reverse leakage current
- Soft reverse recovery at low and high temperature
- Low forward voltage drop
- Low power loss, high efficiency
- High surge capacity
- Guard ring for enhanced ruggedness and long term reliability
- Guaranteed reverse avalanche characteristics
- This is a Pb – Free Device
- All SMC parts are traceable to the wafer lot
- Additional electrical and life testing can be performed upon request
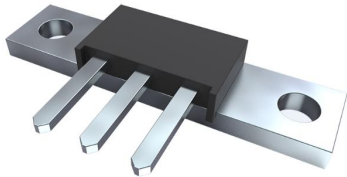
| 89CNQ... | 89CNQ...SL | 89CNQ...SM |
|---|---|---|
|  |  |  |
|  |  |  |
| PRM2 | PRM2-SL | PRM2-SM |

Maximum Ratings:

| Characteristics | Symbol | Condition | Max. | Units |
|--|------------|---|--------------------------------|-------|
| Peak Repetitive Reverse Voltage | V_{RRM} | - | 135(89CNQ135) 150(89CNQ150) | V |
| Working Peak Reverse Voltage | V_{RWM} | | | |
| DC Blocking Voltage | V_R | | | |
| Average Rectified Forward Current | $I_F (AV)$ | 50% duty cycle @T _C =132°C, rectangular wave form | 40(Per Leg) 80(Per Device) | A |
| Peak One Cycle Non-Repetitive Surge Current(Per leg) | I_{FSM} | 8.3 ms, half Sine pulse | 708 | A |

Electrical Characteristics:




| Characteristics | Symbol | Condition | Typ. | Max. | Units |
|----------------------------------|-----------------|---|------|------|-------|
| Forward Voltage Drop (Per leg) * | V _{F1} | @ 40A, Pulse, T _J = 25 °C | 0.82 | 0.99 | V |
| | | @ 80A, Pulse, T _J = 25 °C | 0.88 | 1.14 | |
| | V _{F2} | @ 40A, Pulse, T _J = 125 °C | 0.62 | 0.69 | V |
| | | @ 80A, Pulse, T _J = 125 °C | 0.72 | 0.78 | |
| Reverse Current (Per leg) * | I _{R1} | @V _R = rated VR T _J = 25 °C | 0.02 | 1.5 | mA |
| | I _{R2} | @V _R = rated VR T _J = 125 °C | 4 | 21 | mA |
| Junction Capacitance (Per leg) | C _T | @V _R = 5V, T _C = 25 °C f _{SIG} = 1MHz, VSIG=50mV(p-p) | 1200 | 1400 | pF |

* Pulse width < 300 μs, duty cycle < 2%




Thermal-Mechanical Specifications:

| Characteristics | Symbol | Condition | Specification | Units |
|---|----------------------|--------------------------------------|---------------|-------|
| Junction Temperature | T _J | - | -55 to +175 | °C |
| Storage Temperature | T _{stg} | - | -55 to +175 | °C |
| Typical Thermal Resistance Junction to Case (per leg) | R _{θJC} | DC operation | 0.85 | °C/W |
| Typical Thermal Resistance Junction to Case (per package) | R _{θJC} | DC operation | 0.42 | °C/W |
| Typical Thermal Resistance, case to Heat Sink | R _{θcs} | Mounting surface, smooth and greased | 0.30 | °C/W |
| Mounting Torque | T _M | - | 40(min) | Kg-cm |
| | | | 58(max) | |
| Approximate Weight | wt | - | 7.8 | g |
| Case Style | PRM2 PRM2-SL PRM2-SM | | | |

Ratings and Characteristics Curves

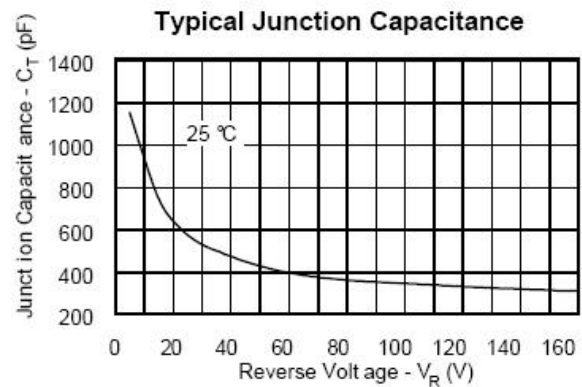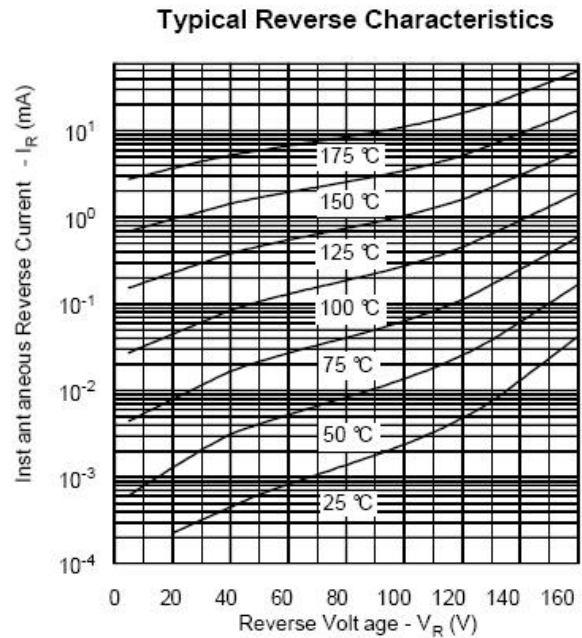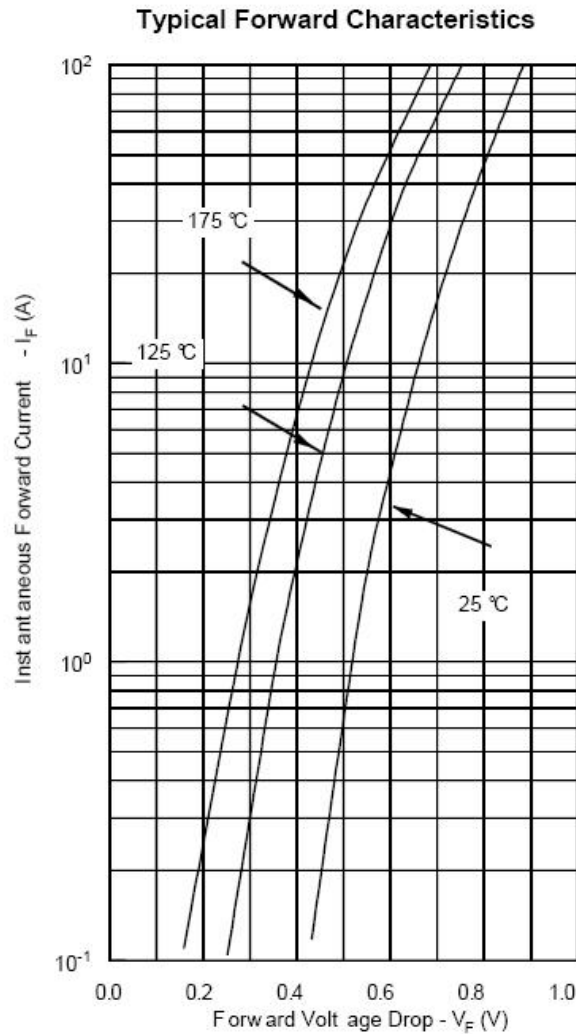

Marking Diagram

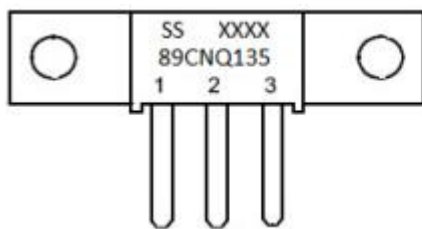

Where XXXX is YYWW


1st row SS YYWWL
2nd row 89CNQ135/SL/SM
3rd row 1 2 3 (pin)
SS = SS
YY = Year
WW = Week

Cautions: Molding resin
Epoxy resin UL:94V-0


Ordering Information

| Device | Package | Terminals finish | Baseplate finish | Shipping |
|--------------|---------|-------------------------------------|------------------|--------------|
| 89CNQ135 | PRM2 | Nickel plated | Nickel plated | 48pcs / box |
| 89CNQ135S2 | PRM2 | Pure Sn dipped (dipped heigh 6-8mm) | Nickel plated | 48pcs / box |
| 89CNQ135SL | PRM2-SL | Pure Sn plated | Pure Sn plated | 100pcs / box |
| 89CNQ135SM | PRM2-SM | Nickel plated | Nickel plated | 48pcs / box |
| 89CNQ135SMS2 | PRM2-SM | Pure Sn dipped (dipped heigh 6-8mm) | Nickel plated | 48pcs / box |
| 89CNQ150 | PRM2 | Nickel plated | Nickel plated | 48pcs / box |
| 89CNQ150S2 | PRM2 | Pure Sn dipped (dipped heigh 6-8mm) | Nickel plated | 48pcs / box |
| 89CNQ150SL | PRM2-SL | Pure Sn plated | Pure Sn plated | 100pcs / box |
| 89CNQ150SM | PRM2-SM | Nickel plated | Nickel plated | 48pcs / box |
| 89CNQ150SMS2 | PRM2-SM | Pure Sn dipped (dipped heigh 6-8mm) | Nickel plated | 48pcs / box |


Mechanical Dimensions PRM2 (Inches/Millimeters)

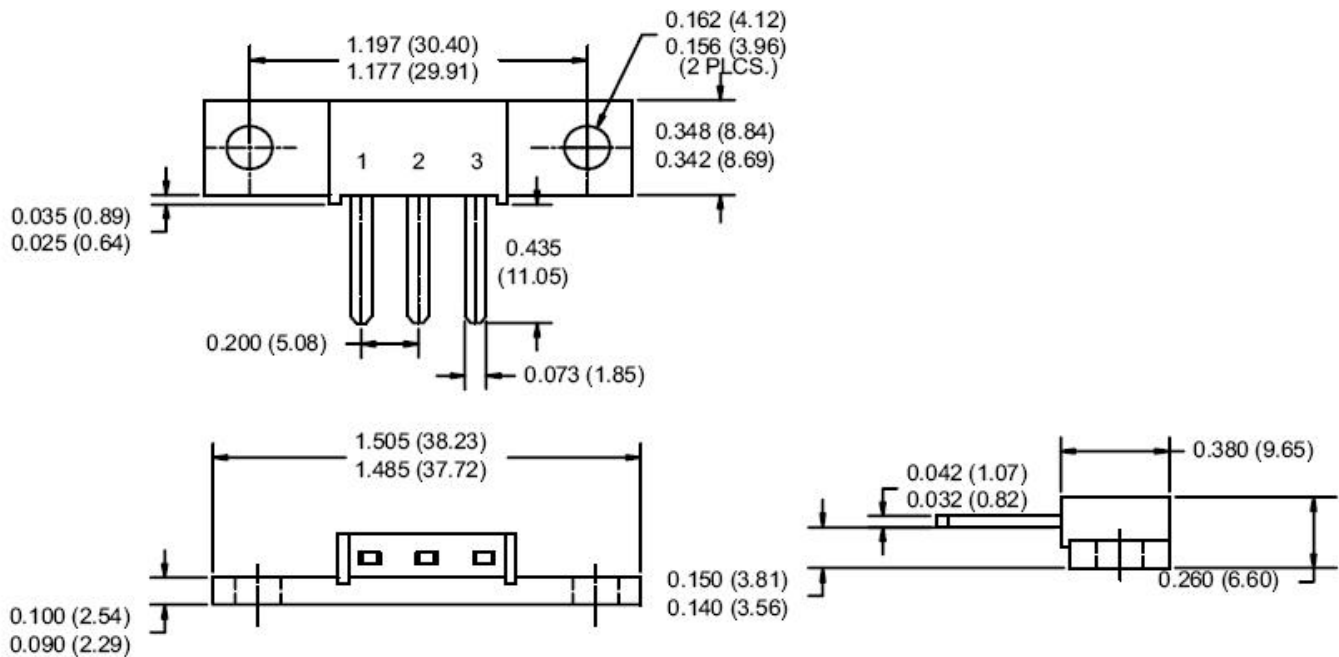

Mechanical Dimensions PRM2-SL (Inches/Millimeters)

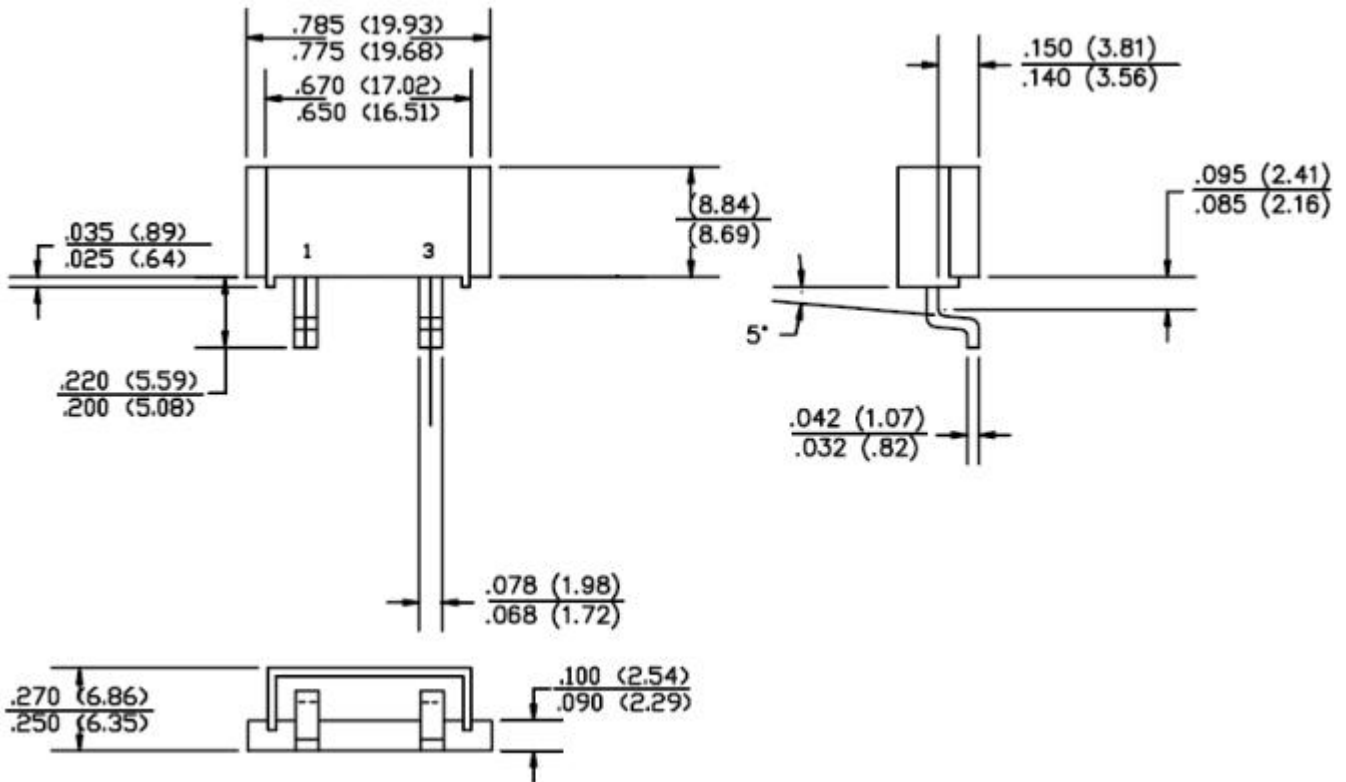

Mechanical Dimensions PRM2-SM (Inches/Millimeters)

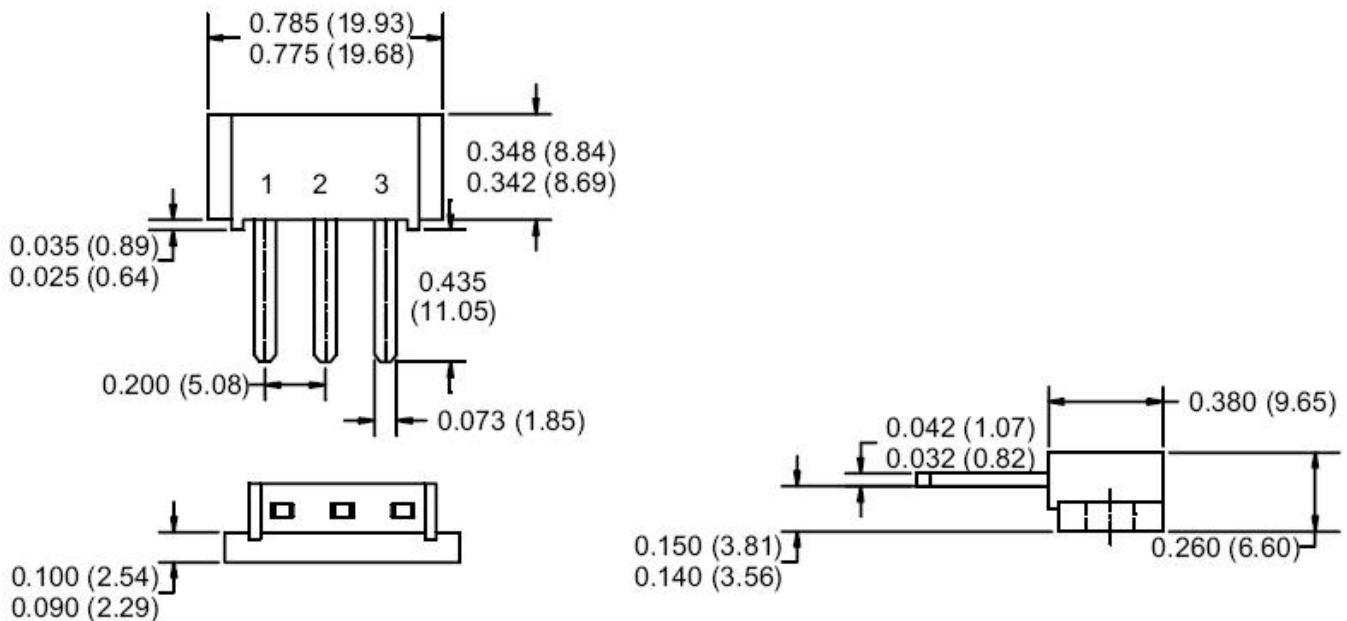



DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..