





Specification:

 	NOTES: 1. MATERIALS: 1-1. BODY: PA66 UL94V-0 1-2. BUTTON: PA66 UL94V-0 1-3. COVER: PA66 UL94V-0 1-4. LONG PIN: PHOSPHOR BRONZE 1-5. SHORT PIN: PHOSPHOR BRONZE 2. PLATING: 2-1. TERMINALS: MATTE-TIN; 3. ELECTRICAL PERFORMANCE:																																	
	<table> <tr> <td></td><td>TUV</td><td>UL</td><td>VDE60998</td><td>VDE60947</td><td>CQC</td></tr> <tr> <td>VOLTAGE RATED:</td><td>450V</td><td>300V</td><td>300V</td><td>450V</td><td>450V</td></tr> <tr> <td>CURRENT RATED:</td><td>9A</td><td>7A</td><td>3A</td><td>5A</td><td></td></tr> <tr> <td>CROSS SECTION:</td><td>0.2~1.5mm²</td><td>24~16AWG</td><td>0.2~0.75mm²</td><td>0.2~1.5mm²</td><td>0.2~1.5mm²</td></tr> <tr> <td>STRIP LENGTH:</td><td>(Sol&Str) 7~8mm</td><td>(Sol&Str) 8mm</td><td>(Sol&Str) 7~8mm</td><td>(Sol&Str) 7~9mm</td><td>(Sol&Str) 7~8mm</td></tr> </table> 4. ENVIRONMENTAL CHARACTERISTICS: 4-1. STORAGE TEMPERATURE RANGE: -10°C~+50°C/ HALF A YEAR 4-2. OPERATING TEMPERATURE RANGE: -40°C~+105°C 5. ROHS COMPLIANT Unit mm Scale 1:1						TUV	UL	VDE60998	VDE60947	CQC	VOLTAGE RATED:	450V	300V	300V	450V	450V	CURRENT RATED:	9A	7A	3A	5A		CROSS SECTION:	0.2~1.5mm ²	24~16AWG	0.2~0.75mm ²	0.2~1.5mm ²	0.2~1.5mm ²	STRIP LENGTH:	(Sol&Str) 7~8mm	(Sol&Str) 8mm	(Sol&Str) 7~8mm	(Sol&Str) 7~9mm
	TUV	UL	VDE60998	VDE60947	CQC																													
VOLTAGE RATED:	450V	300V	300V	450V	450V																													
CURRENT RATED:	9A	7A	3A	5A																														
CROSS SECTION:	0.2~1.5mm ²	24~16AWG	0.2~0.75mm ²	0.2~1.5mm ²	0.2~1.5mm ²																													
STRIP LENGTH:	(Sol&Str) 7~8mm	(Sol&Str) 8mm	(Sol&Str) 7~8mm	(Sol&Str) 7~9mm	(Sol&Str) 7~8mm																													

Product Drawing:

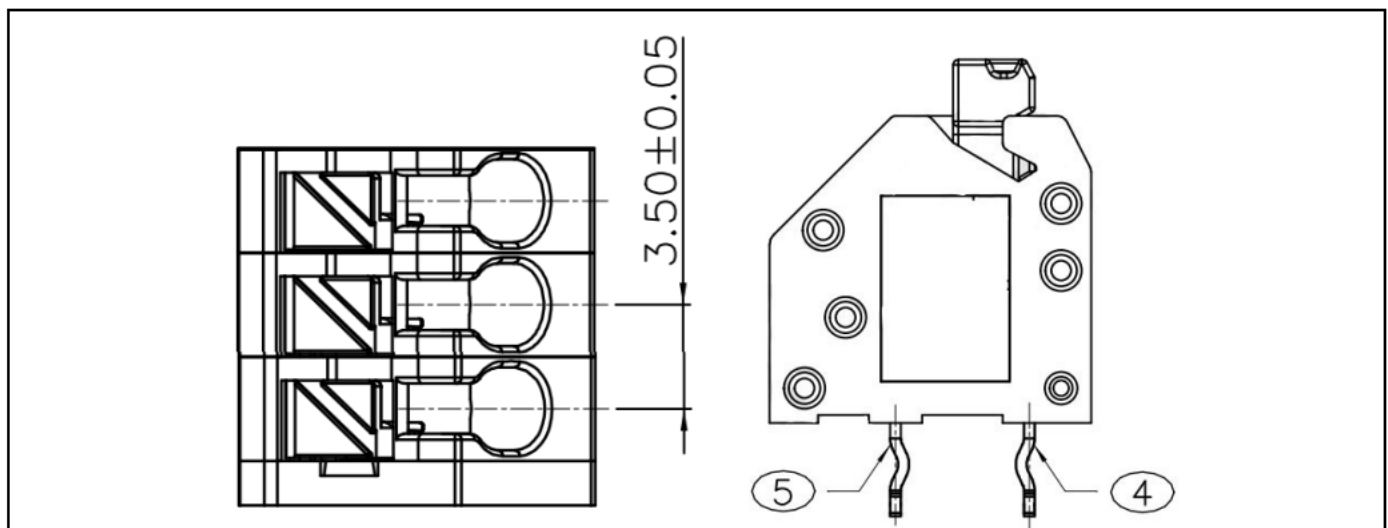

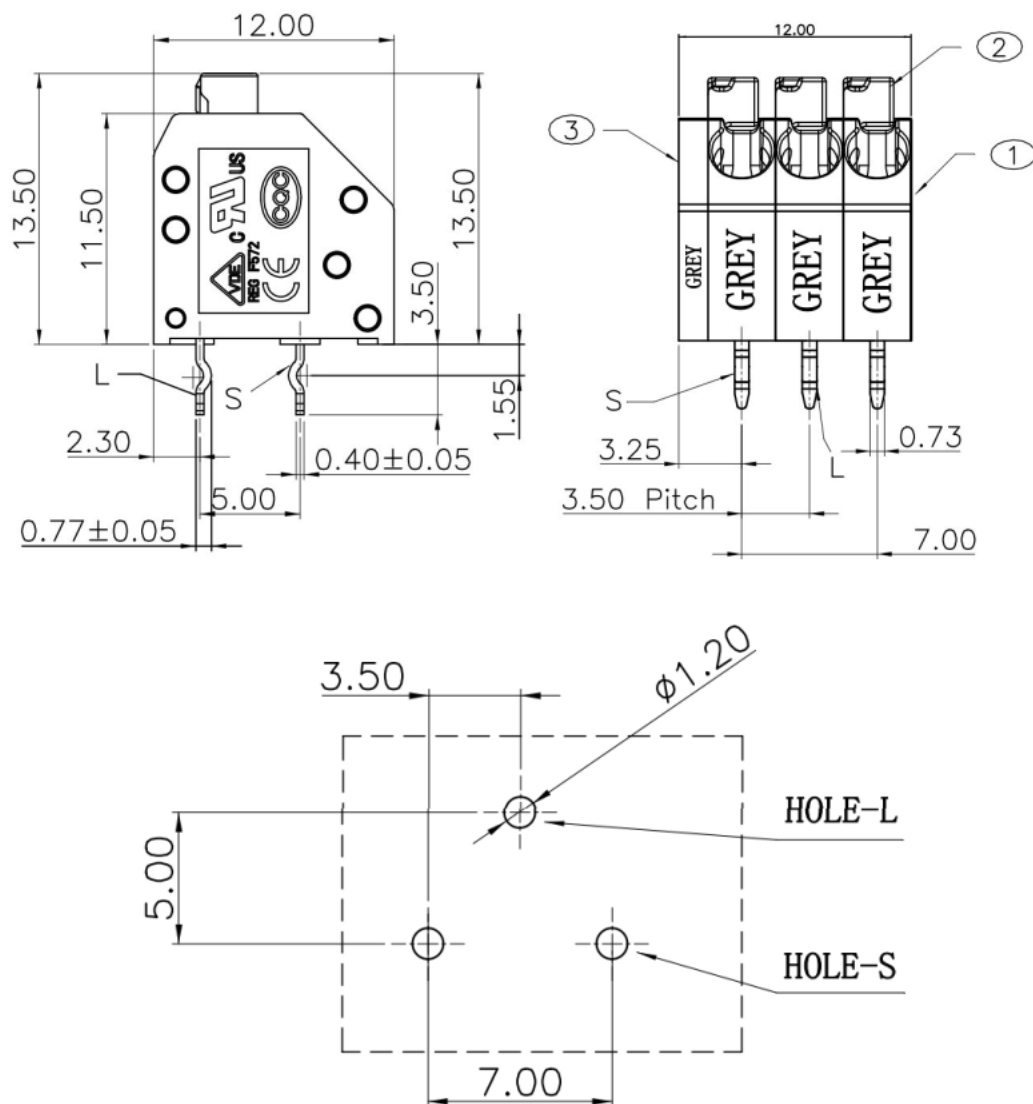

RECOMMENDED PCB LAYOUT(TOP VIEW)
 TOLERANCE:±0.05

⑤	TERMINAL-S	2	COPPER ALLOY	MATTE-TIN
④	TERMINAL-L	1	COPPER ALLOY	MATTE-TIN
③	COVER	1	PA66 UL94V-0	SEE THE MARK
②	BUTTON	3	PA66 UL94V-0	SEE THE MARK
①	HOUSING	3	PA66 UL94V-0	SEE THE MARK
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH&COLOR