


Arduino Pro Mini (DEV-11113)

Programmed as Arduino Pro Mini w/ ATmega328

16MHz/5V

Name	ADC
Power	PWM
GND	Serial
Control	Ext Interrupt
Arduino	PC Interrupt
Port	Misc

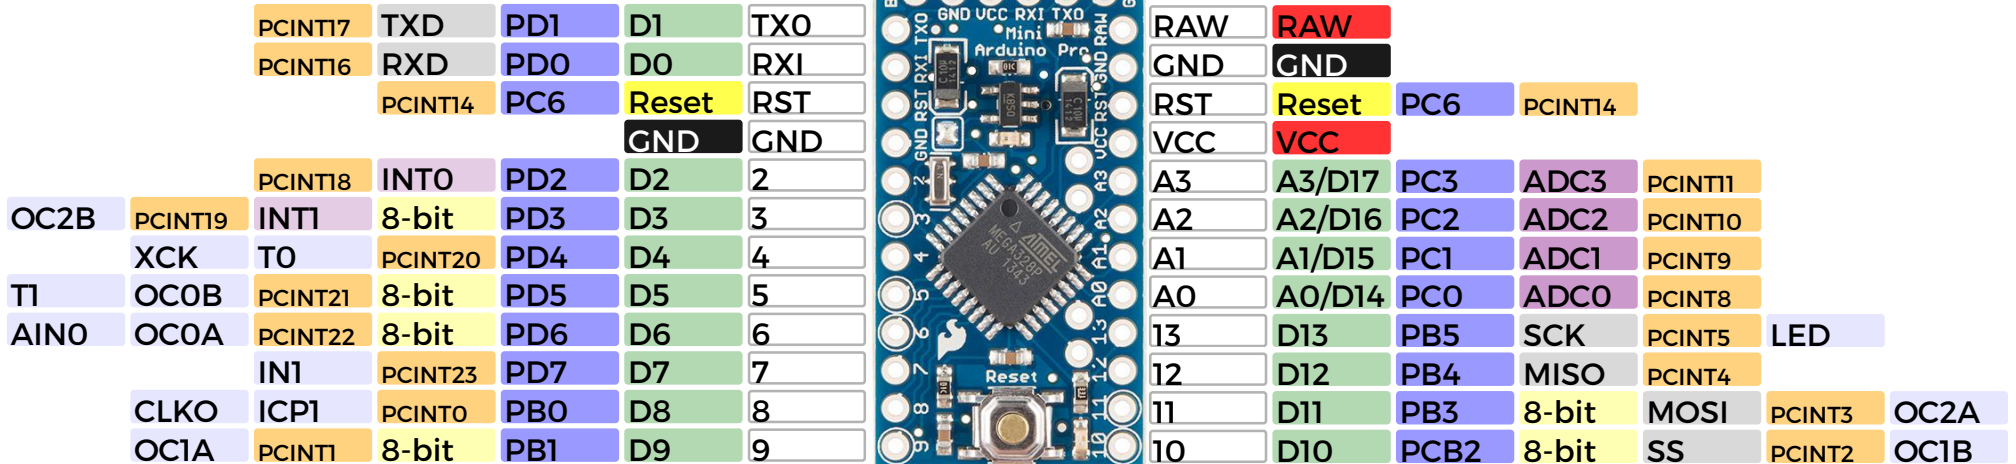

Reset Button


A5	A5/D19	PC5	ADC5	SCL	PCINT13
A4	A4/D18	PC4	ADC4	SDA	PCINT12

A7	A7	ADC7
A6	A6	ADC6

Power
 Raw: 5V-16V (6V-12V recommended)
 VCC: 5V
 Maximum current: 150mA @5V

ATmega328P
 Absolute maximum VCC: 6V
 Maximum current for chip: 200mA
 Maximum current per pin: 40mA
 Recommended current per pin: 20mA
 8-bit Atmel AVR
 Flash Program Memory: 32kB
 EEPROM: 1kB
 Internal SRAM 2kB
 ADC: 10-bit
 PWM: 8bit

LEDs
 Power: Red
 User (D13): Green

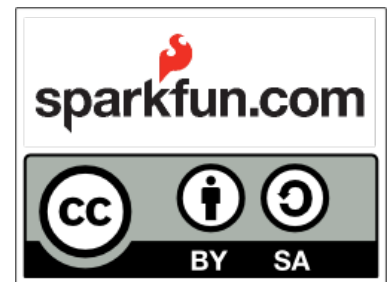

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SparkFun Electronics:](#)

[DEV-11113](#)