

General information:

General-purpose relay
 Various relays, including
 LED, test button
 With 2Z, 4Z contact forms
 With various terminal types
 Gilt contact types
 Transparent dust-proof
 cover, Various mounting
 types
 Various sockets available



IS HH5(MY2)



IS HH5(MY3)



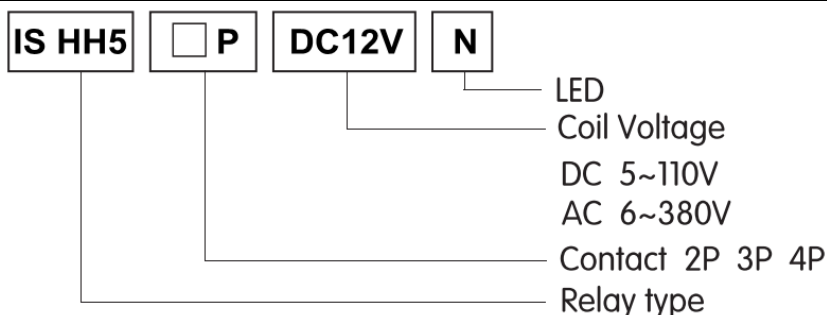
IS HH5(MY4)

Contact ratings:

Contact ratings	2Z, 3Z	4Z
Contact resistance	50m Q (1A 6VDC)	
Contact capacity	5A/220VAC	3A/220VAC 30VDC

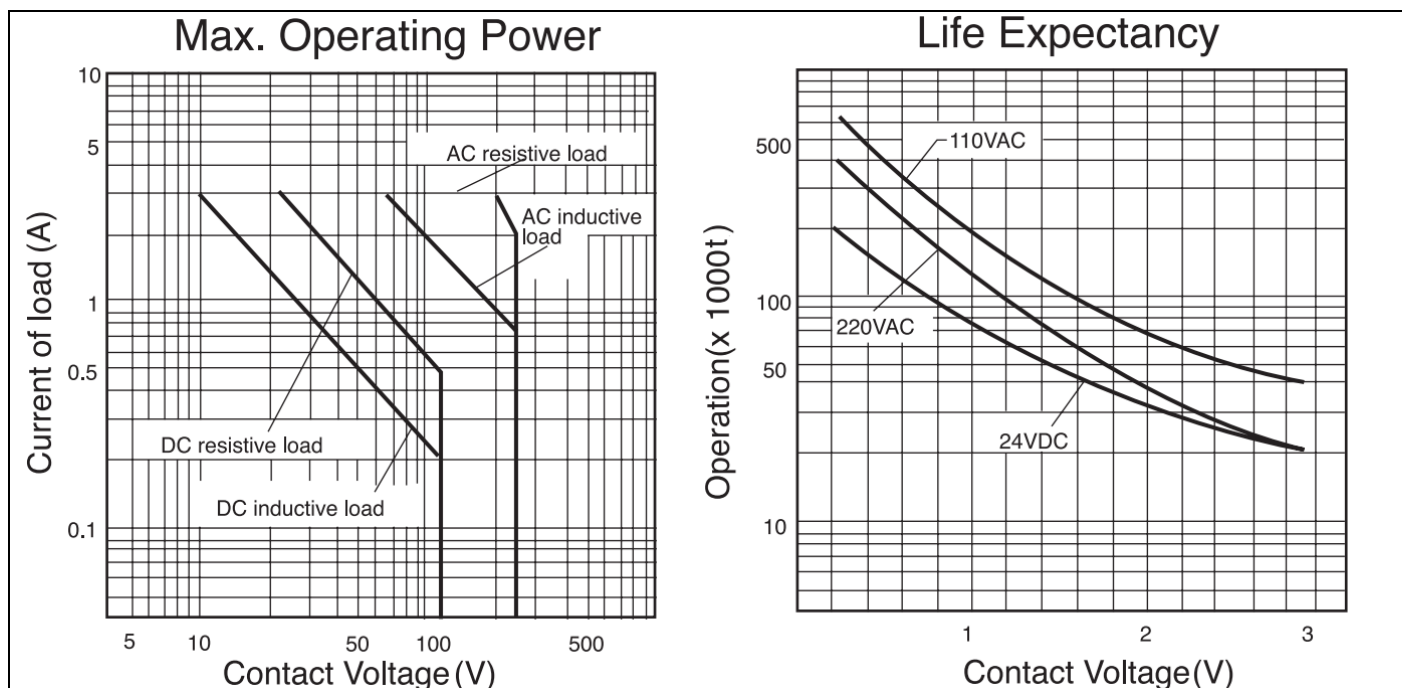
Specification:

Insulation resistance	500MΩ 500VAC
Dielectric Strength	BCC 1000VAC 1min
	BOC 1500VAC 1min
	COC 1500VAC 1min
Operate Time	20ms /25ms
Terminal Type	PCB & Socket
Coil Ratings	
Nominal Coil Power	0.9W/1.2VA

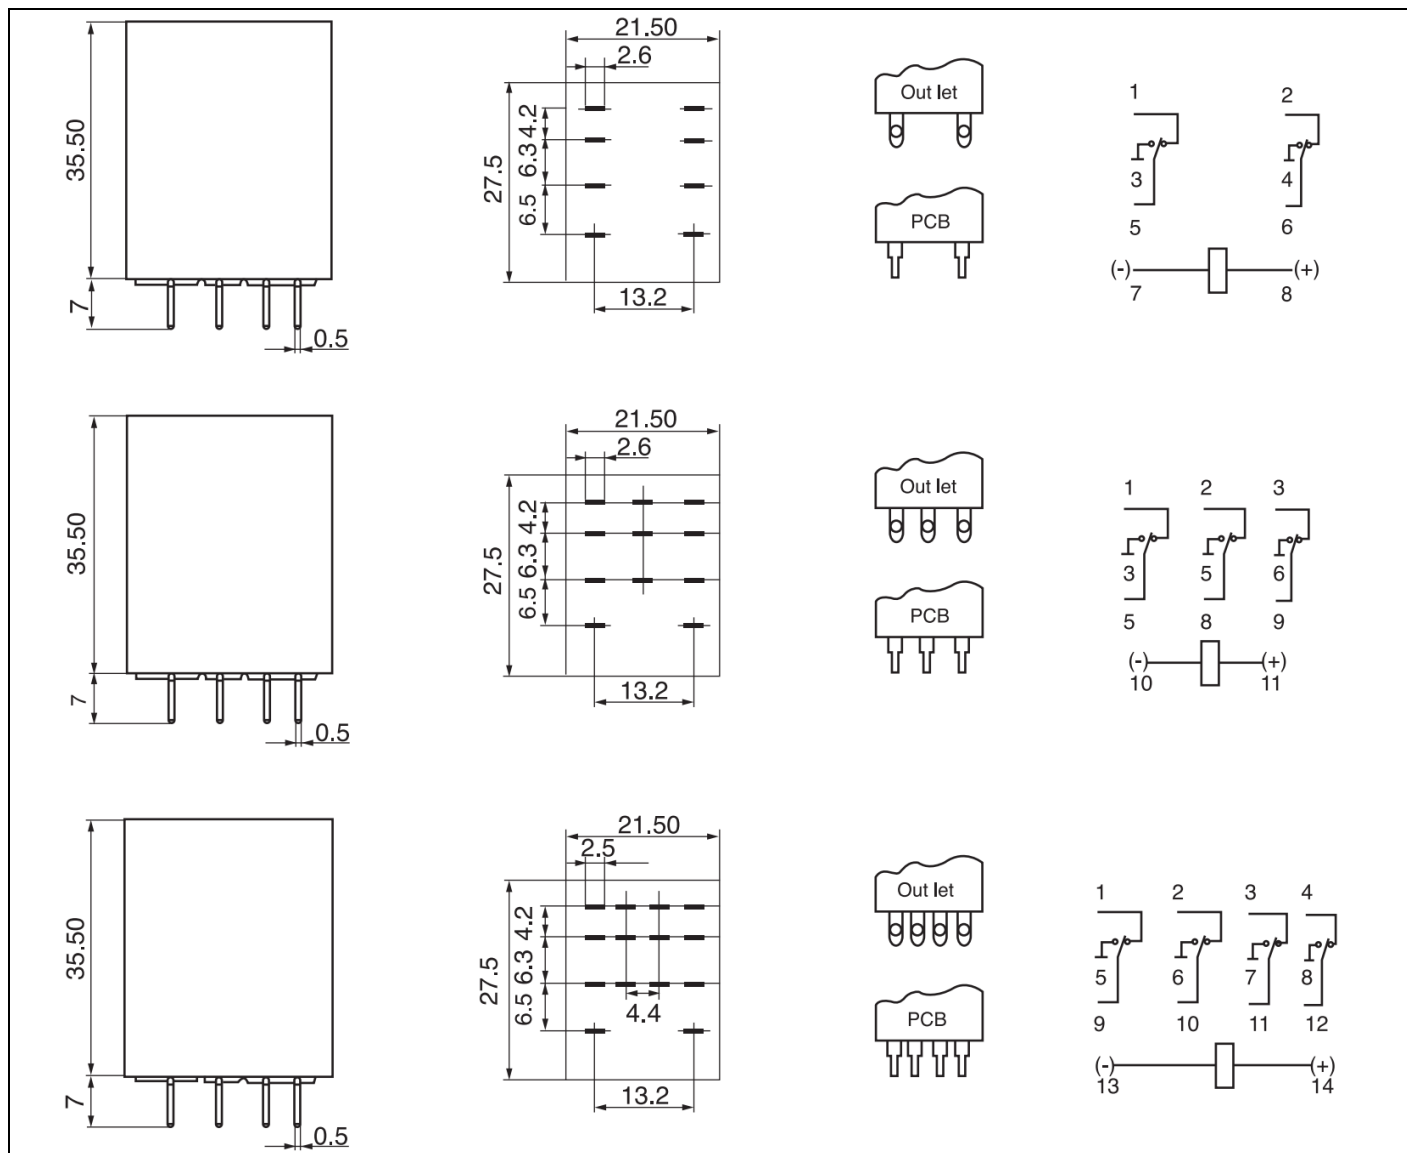
Ordering code:


Coil versions:

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : $\pm 10\%$
5	4.00	0.50	30
6	4.80	0.60	40
12	9.60	1.20	160
24	19.20	2.40	640
48	38.40	4.80	2500
110	88.00	11.00	12100
Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω : $\pm 10\%$
6	4.80	1.80	12
12	9.60	3.60	42
24	19.20	7.20	168
48	38.40	14.40	675
110	96.00	36.00	3500
220/240	176.00	66.00	14000

Reference data:


Dimension. Bottom View:



Socket type:

