

STRADA

The most versatile modular product family especially designed for street lighting, but also suitable for wide range of other applications

STRADA is LEDiL's most comprehensive product family with a wide variety of different beams suitable for both outdoor and indoor lighting. The standardized modules are available in 2X2 and 2X6 layouts as well as in two different single formats. 2X2MX features a standardized 90 x 90 mm footprint. The latest addition to the product family includes silicone versions for increased durability and thermal resistance. Being especially designed for street lighting they provide highly efficient and uniform lighting.


STRADA-2X2

50 x 50 mm 2X2 arrays for up to 5050 size LED packages



PRODUCTS:


C12419_STRADA-2X2-A-T

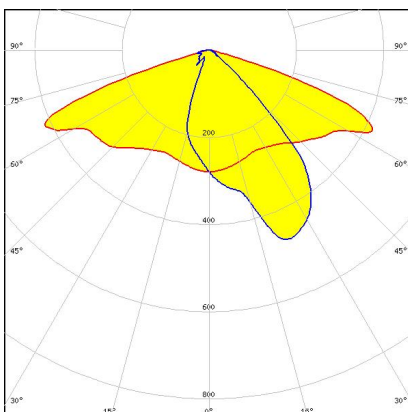

Dimensions: 50.0 mm x 50.0 mm
Height: 7.30 mm

Short IESNA Type II beam for narrow roads or high poles with extremely low glare


C15962_STRADA-2X2-FS3

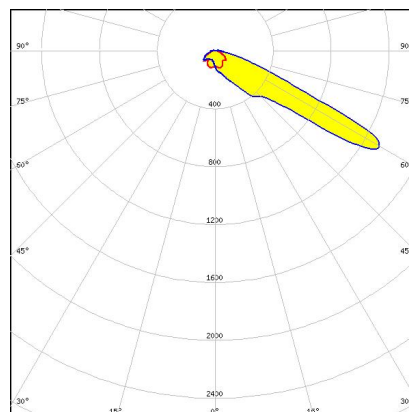

Dimensions: 50.0 mm x 50.0 mm
Height: 12.00 mm

Forward throw beam optimized for European tunnels lighting with counter-beam method

C14515_STRADA-2X2-ME-PC

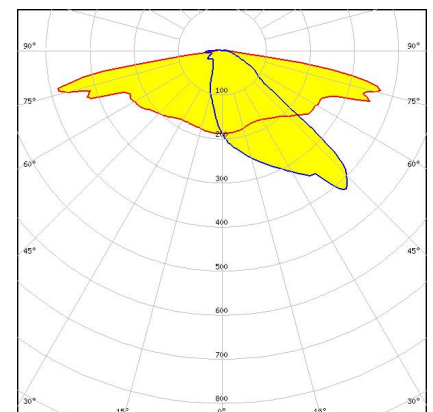

Dimensions: 50.0 mm x 50.0 mm
Height: 8.15 mm


Beam with excellent longitudinal luminance uniformity fulfilling EN13201 M-class requirements where road width is equal to or less the pole height. Variant

LEDiL®

**PRODUCT FAMILY
DATASHEET
STRADA**

PRODUCTS:


C12360_STRADA-2X2-DNW

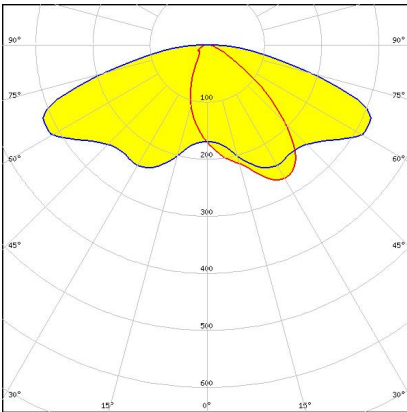

Dimensions: 50.0 mm x 50.0 mm
Height: 11.27 mm

Soft wide beam with good illuminance uniformity


C15594_STRADA-2X2-MEW

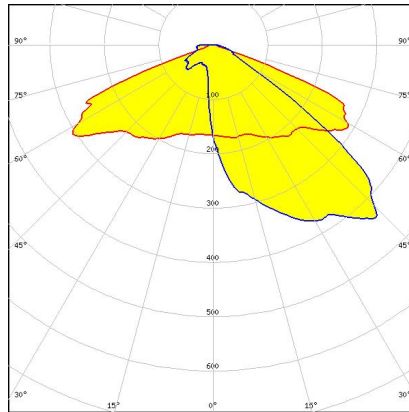

Dimensions: 50.0 mm x 50.0 mm
Height: 10.16 mm

Beam with extremely low glare fulfilling EN13201 M-class requirements for wet road surfaces in North Europe


C14164_STRADA-2X2-ME-WIDE1

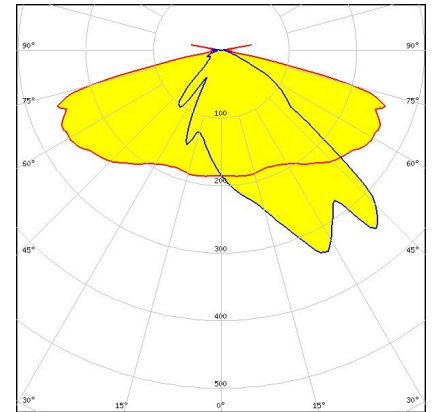

Dimensions: 50.0 mm x 50.0 mm
Height: 8.30 mm

Beam with excellent longitudinal luminance uniformity fulfilling EN13201 M-class requirements where road width is equal to or less than the pole height. Added house-side backlight.


C15413_STRADA-2X2-T2-PC

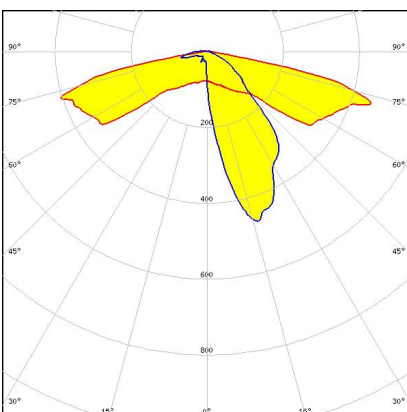

Dimensions: 50.0 mm x 50.0 mm
Height: 7.70 mm

IESNA Type II (medium) beam applicable for European P-class standard pedestrian lighting and M-class roads. Variant made from PC.


C14109_STRADA-2X2-NHS

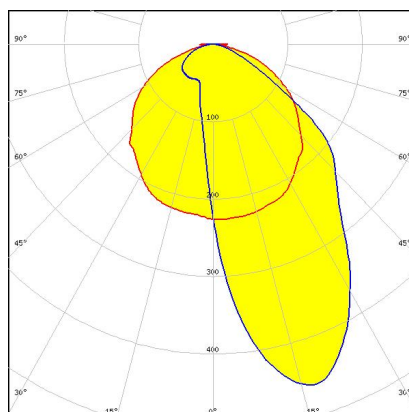

Dimensions: 50.0 mm x 50.0 mm
Height: 9.80 mm

Narrow beam with minimal house side backlight

C15217_STRADA-2X2-CAT-B

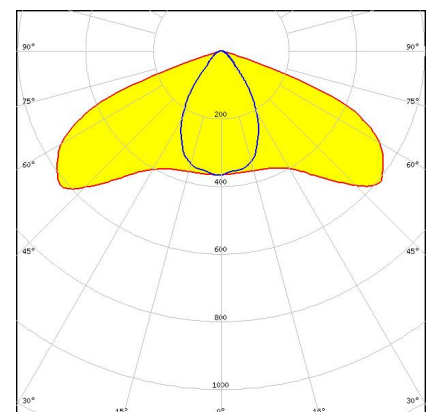


Dimensions: 50.0 mm x 50.0 mm
Height: 7.73 mm

Narrow catenary street light beam, optimized for EN13201 M-classes and tilted poles

PRODUCTS:


C13936_STRADA-2X2-B2-STP

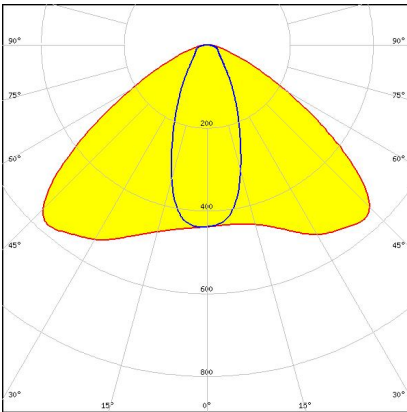

Dimensions: 50.0 mm x 50.0 mm
Height: 5.18 mm

Beam for area lighting and applications demanding a wide oval beam pattern


C16702_STRADA-2X2-CAT-B-PC

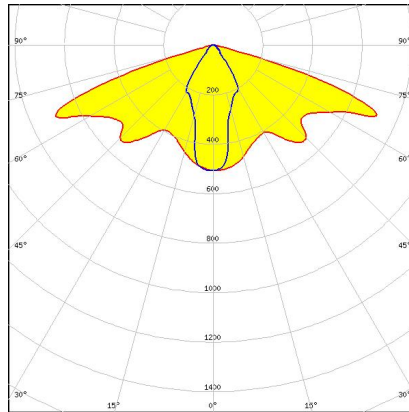

Dimensions: 50.0 mm x 50.0 mm
Height: 7.73 mm

Narrow catenary street light beam, optimized for EN13201 M-classes and tilted poles. Variant made from PC.


C15021_STRADA-2X2-SCL

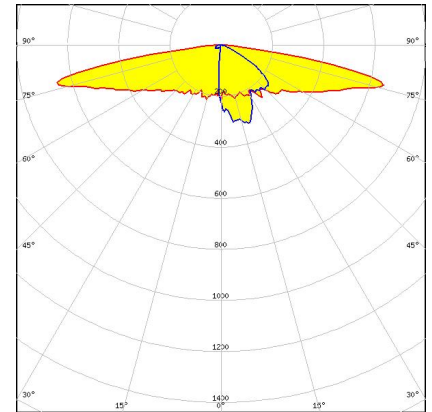

Dimensions: 50.0 mm x 50.0 mm
Height: 7.80 mm

Type II/III (long) beam for very wide pole to pole distances. Ideal for pedestrian paths and residential roads. EN13201 P-classes.


C13805_STRADA-2X2-T4

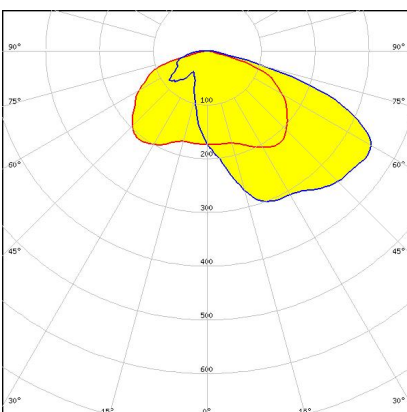

Dimensions: 50.0 mm x 50.0 mm
Height: 7.70 mm

IESNA Type IV beam for wider roads and large outdoor area


C16504_STRADA-2X2-T2-M

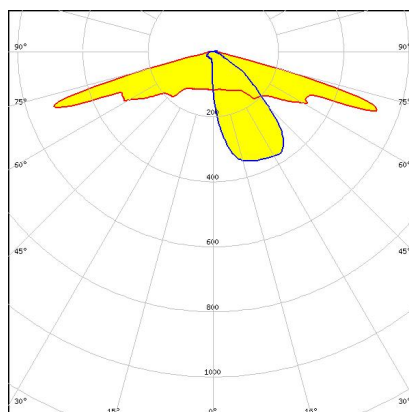

Dimensions: 50.0 mm x 50.0 mm
Height: 11.85 mm

IESNA Type II Medium beam with excellent back light control, illuminance uniformity and cutoff

C14991_STRADA-2X2-C-STP-PC

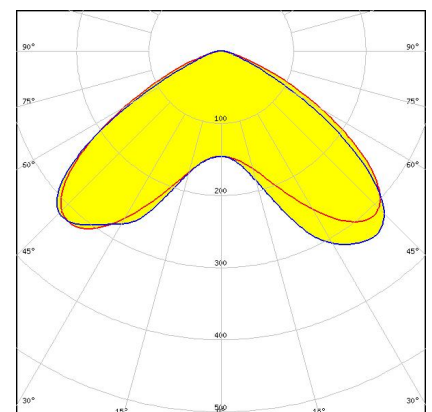


Dimensions: 50.0 mm x 50.0 mm
Height: 6.27 mm

Beam for area and street lighting such as parks and pedestrian walkways. Variant made from PC.

PRODUCTS:


C13604_STRADA-2X2-FN

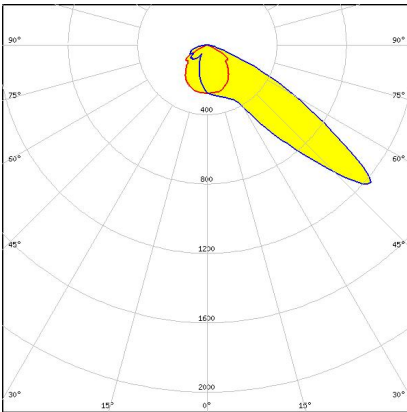

Dimensions: 50.0 mm x 50.0 mm
Height: 10.00 mm

Narrow forward throw beam for area lighting. Excellent for lighting stadiums and airports from high masts.


C16464_STRADA-2X2-T4-B-PC

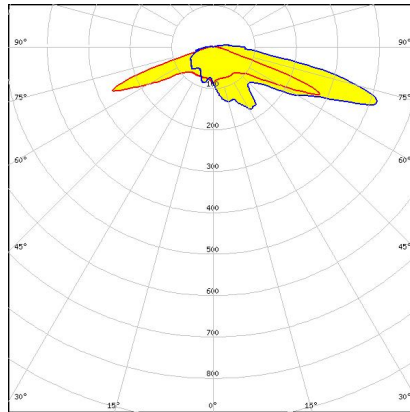

Dimensions: 50.0 mm x 50.0 mm
Height: 9.02 mm

Wide IESNA Type IV forward-throw beam for wide area lighting like car parks. Variant made from PC.


C14750_STRADA-2X2-CAT

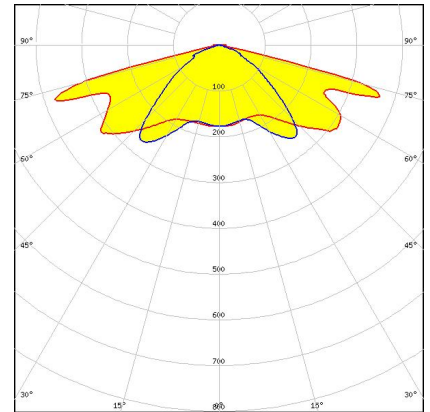

Dimensions: 50.0 mm x 50.0 mm
Height: 6.20 mm

Catenary street light beam optimized for EN13201 M-classes


C13301_STRADA-2X2-T3

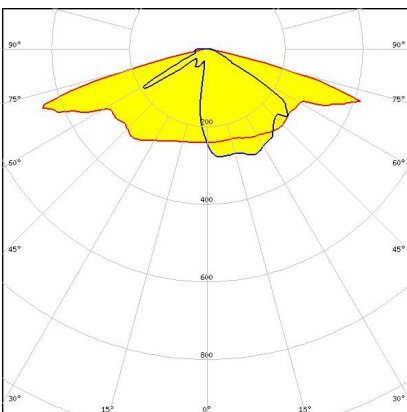

Dimensions: 50.0 mm x 50.0 mm
Height: 7.10 mm

IESNA Type III (medium) beam for roads that are equal to or wider than mounting height


C16378_STRADA-2X2-FR

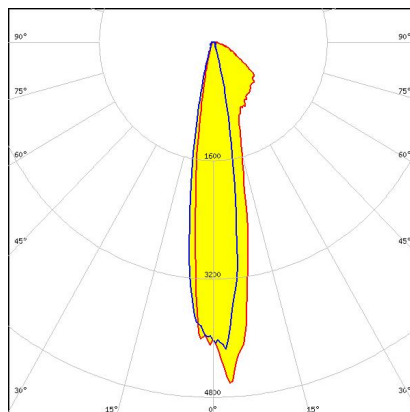

Dimensions: 50.0 mm x 50.0 mm
Height: 11.80 mm

Asymmetric spotlight beam for floodlighting railway tracks according to Russian normative

C14680_STRADA-2X2-VSM

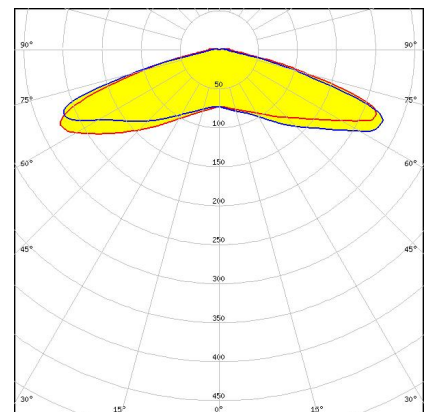


Dimensions: 50.0 mm x 50.0 mm
Height: 6.14 mm

IESNA Type V (square) beam for wide areas lighting such as car parks

PRODUCTS:


C13299_STRADA-2X2-ME

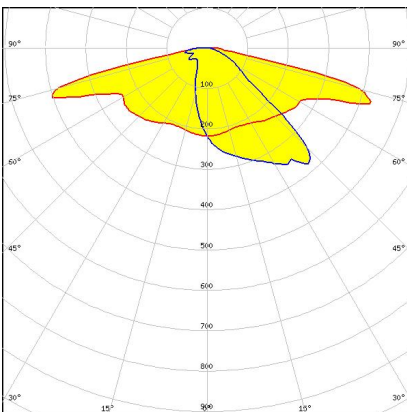

Dimensions: 50.0 mm x 50.0 mm
Height: 7.10 mm

Beam with excellent longitudinal luminance uniformity fulfilling EN13201 M-class requirements where road width is equal to or less the pole height


C16097_STRADA-2X2-CY-PC

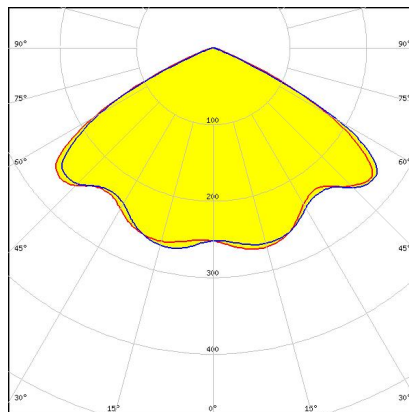

Dimensions: 50.0 mm x 50.0 mm
Height: 7.85 mm

Beam for canopy lighting with batwing light distribution. Suitable for symmetrical tunnel lighting. Variant made from PC.


C14517_STRADA-2X2-DWC-PC

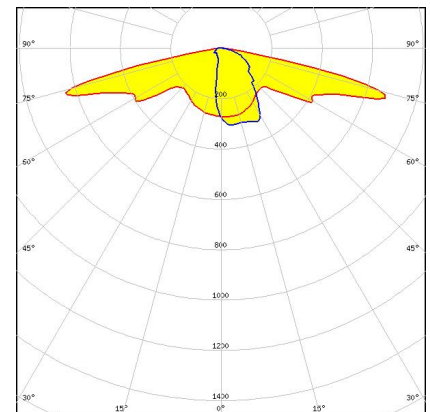

Dimensions: 50.0 mm x 50.0 mm
Height: 6.00 mm

Universal road lighting beam with excellent mixed illuminance and luminance uniformity. Typically IESNA Type III Medium. Variant made from PC.


C12362_STRADA-2X2-DWC

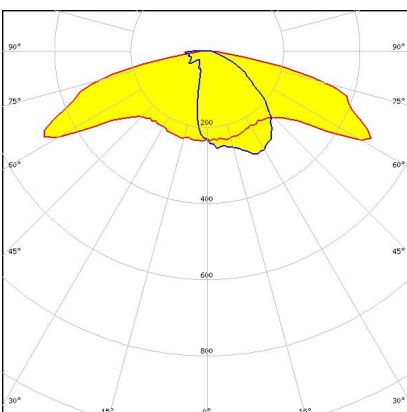

Dimensions: 50.0 mm x 50.0 mm
Height: 6.00 mm

Universal road lighting beam with excellent mixed illuminance and luminance uniformity. Typically IESNA Type III Medium.


C15687_STRADA-2X2-FW

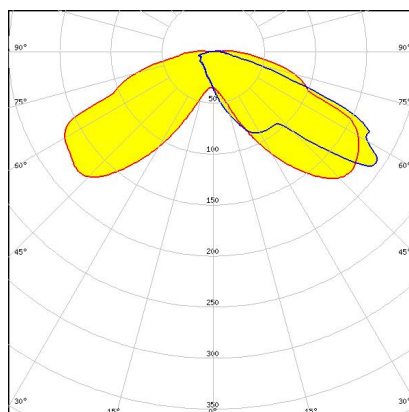

Dimensions: 50.0 mm x 50.0 mm
Height: 10.90 mm

Beam with wide light distribution and good illuminance uniformity for residential street lighting and staggered pole setups

C14165_STRADA-2X2-ME-WIDE2

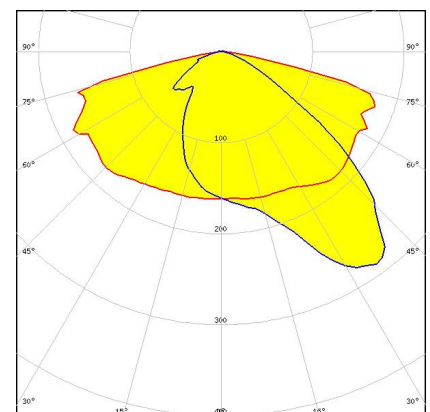


Dimensions: 50.0 mm x 50.0 mm
Height: 7.00 mm

Beam with excellent longitudinal luminance uniformity for staggered pole setups fulfilling EN13201 M-class requirements where road width is equal to or less than the pole height

PRODUCTS:


C15540_STRADA-2X2-T3-PC

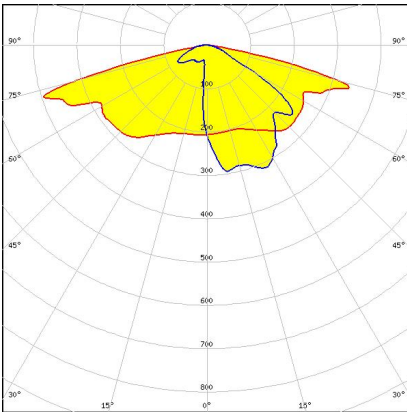

Dimensions: 50.0 mm x 50.0 mm
Height: 7.10 mm

IESNA Type III (medium) beam for roads that are equal to or wider than mounting height. Variant made from PC.


C14116_STRADA-2X2-PX

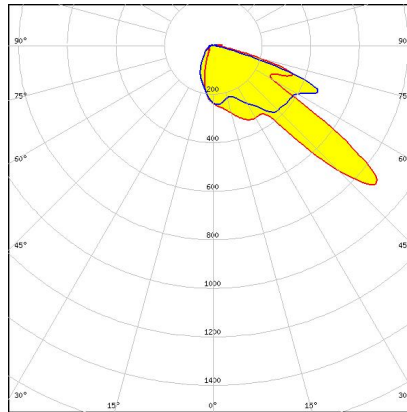

Dimensions: 50.0 mm x 50.0 mm
Height: 8.00 mm

Fully asymmetric beam designed to highlight pedestrian crossings for right side traffic


C15292_STRADA-2X2-T2-C

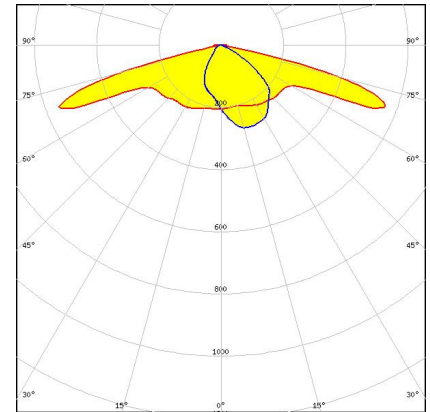

Dimensions: 50.0 mm x 50.0 mm
Height: 7.34 mm

IESNA Type II (medium) beam with added house side backlight. Designed for tilted and long armatures.


C13937_STRADA-2X2-C-STP

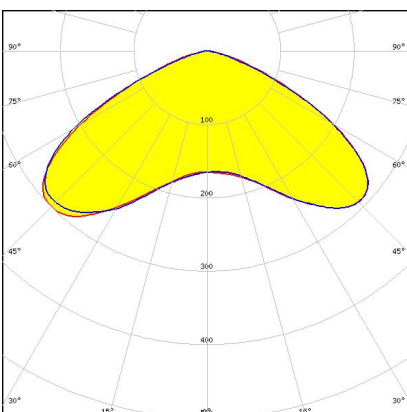

Dimensions: 50.0 mm x 50.0 mm
Height: 5.30 mm

Beam for area and street lighting such as parks and pedestrian walkways


C16795_STRADA-2X2-T2-M-PC

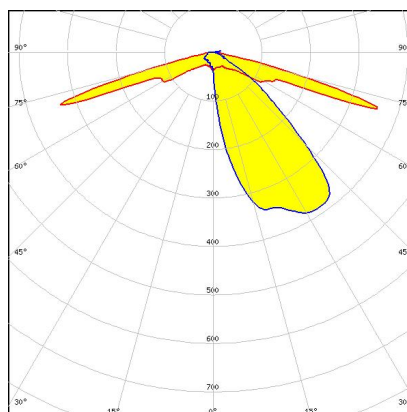

Dimensions: 50.0 mm x 50.0 mm
Height: 11.85 mm

IESNA Type II Medium beam with excellent back light control, illuminance uniformity and cutoff. Variant made from PC.

C15135_STRADA-2X2-T1

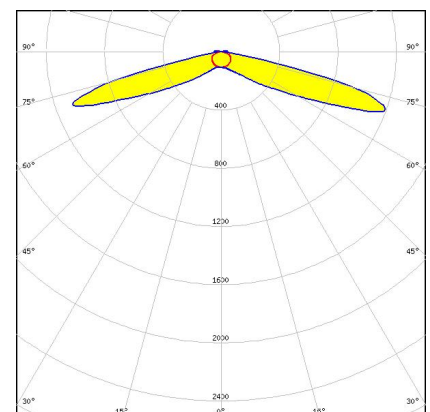


Dimensions: 50.0 mm x 50.0 mm
Height: 7.78 mm

Symmetric IESNA Type I (medium) beam for narrow roads and paths with long pole distance and tilted armature

PRODUCTS:


C13858_STRADA-2X2-XW

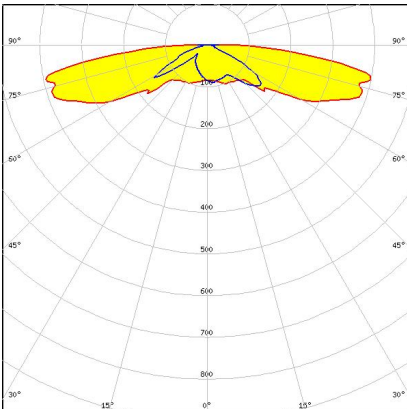

Dimensions: 50.0 mm x 50.0 mm
Height: 7.10 mm

Extra wide beam for wide area security lighting


C16505_STRADA-2X2-T3-M

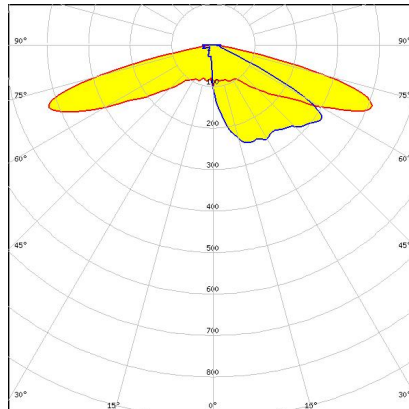

Dimensions: 50.0 mm x 50.0 mm
Height: 9.73 mm

IESNA Type III Medium beam with excellent back light control, illuminance uniformity and cutoff


C15014_STRADA-2X2-T4-B

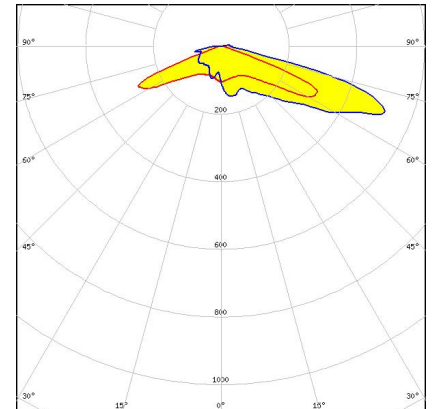

Dimensions: 50.0 mm x 50.0 mm
Height: 9.02 mm

Wide IESNA Type IV forward-thrown beam for wide area lighting like car parks


C13699_STRADA-2X2-DN

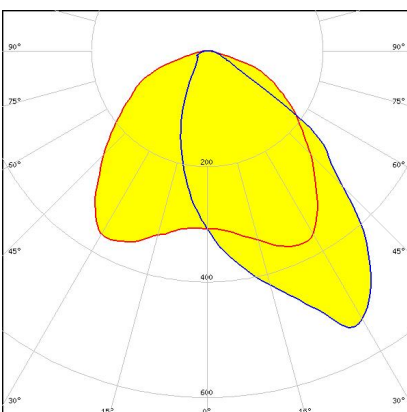

Dimensions: 50.0 mm x 50.0 mm
Height: 8.05 mm

Beam for area lighting with shorter illumination distances


C16473_STRADA-2X2-SCL-PC

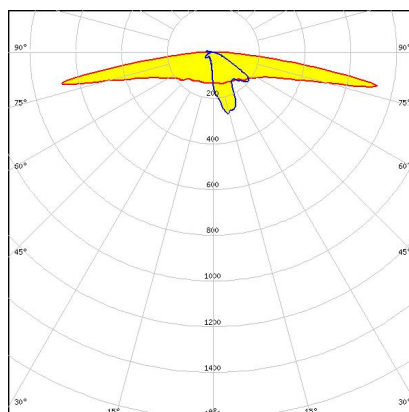

Dimensions: 50.0 mm x 50.0 mm
Height: 7.80 mm

Type II/III (long) beam for very wide pole to pole distances. Ideal for pedestrian paths and residential roads. EN13201 P-classes. Variant made from PC.

C14896_STRADA-2X2-PXL

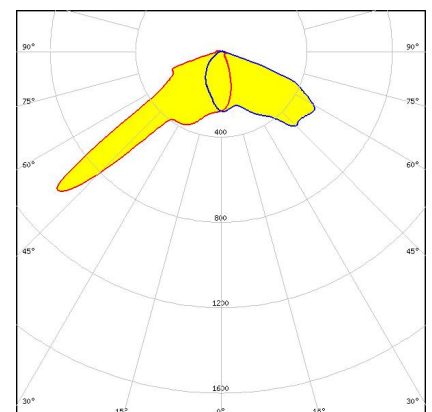


Dimensions: 50.0 mm x 50.0 mm
Height: 8.00 mm

Fully asymmetric beam designed to highlight pedestrian crossings for left side traffic

PRODUCTS:


C13499_STRADA-2X2-CY

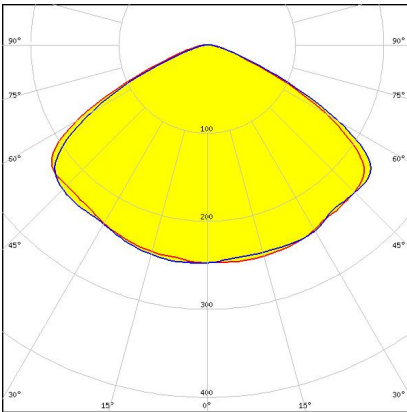

Dimensions: 50.0 mm x 50.0 mm
Height: 5.95 mm

Beam for canopy lighting with batwing light distribution. Suitable for symmetrical tunnel lighting.


C16395_STRADA-2X2-T1-PC

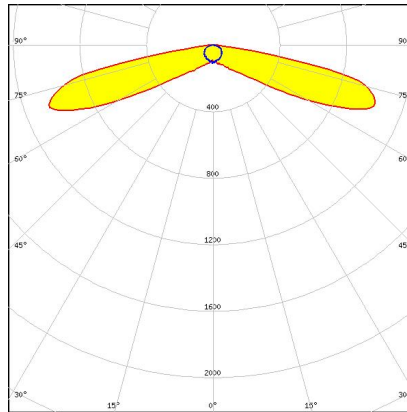

Dimensions: 50.0 mm x 50.0 mm
Height: 7.78 mm

Symmetric IESNA Type I (medium) beam for narrow roads and paths with long pole distance and tilted armature. Variant made from PC.


C14731_STRADA-2X2-FN-PC

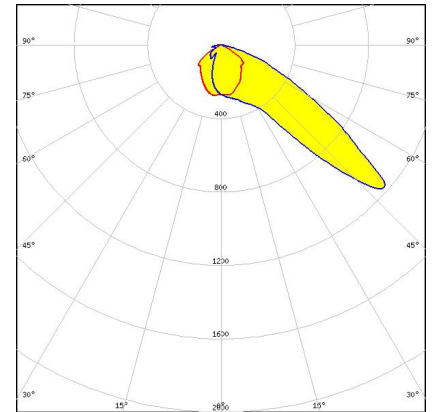

Dimensions: 50.0 mm x 50.0 mm
Height: 10.00 mm

Narrow forward throw beam for area lighting. Excellent for lighting stadiums and airports from high masts. Variant made from PC.


C13300_STRADA-2X2-T2

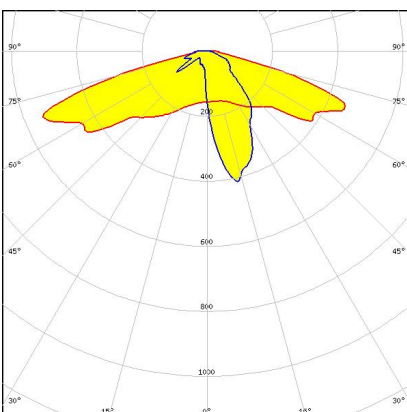

Dimensions: 50.0 mm x 50.0 mm
Height: 7.70 mm

IESNA Type II (medium) beam applicable for European P-class standard pedestrian lighting and M-class roads


C16181_STRADA-2X2-ME-N

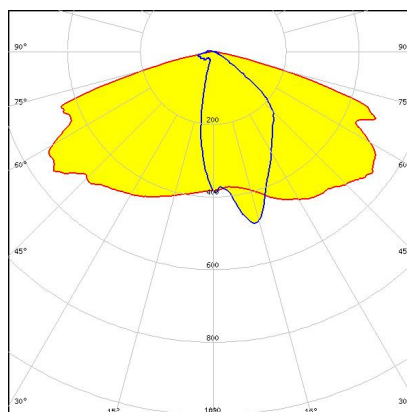

Dimensions: 50.0 mm x 50.0 mm
Height: 9.70 mm

Beam designed for high poles and fulfilling EN13201 M-class requirements where road width is less than the pole height

C14556_STRADA-2X2-TF

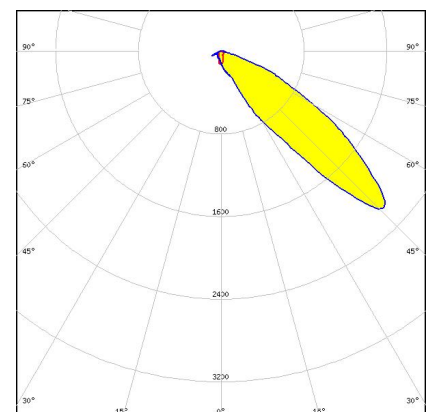

Dimensions: 50.0 mm x 50.0 mm
Height: 8.73 mm

Narrow forward throw beam optimized for European tunnels

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)